

Electromechanical Buzzer



Features

- ROHS compliant
- Black in colour
- Sound output from side
- Housing material: LCP





Specification

Rated Voltage (Vp-p square wave)	3 Vp-p
Operating Voltage Min.	1 V
Operating Voltage Max.	25 V
Rated Current*	≤1 mA
Capacitance at 1 KHz	15000±30% pF
Sound Output at 4 kHz at 100 mm*	≥ 75 dB
Resonant Frequency*	4000±500 Hz
Operating Temperature Min.	-30 °C
Operating Temperature Max.	70 °C
Storage Temperature Min.	-40 °C
Storage Temperature Max.	85 °C
Weight	0.4 g

*Value applying at rated voltage (AC)

Requires additional electronic circuitry to operate as a sounder

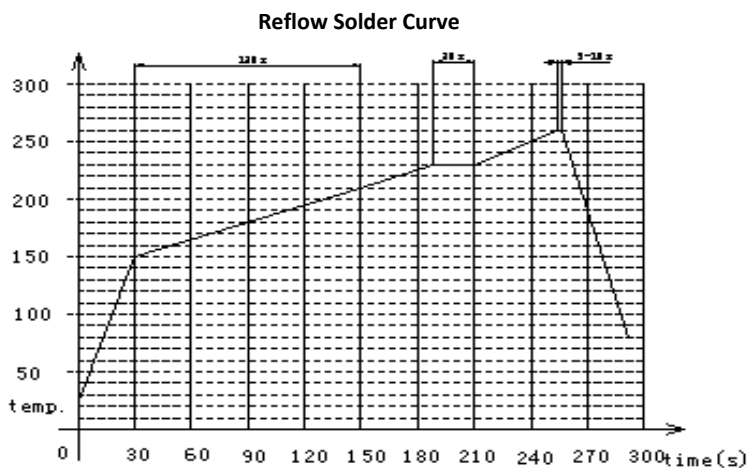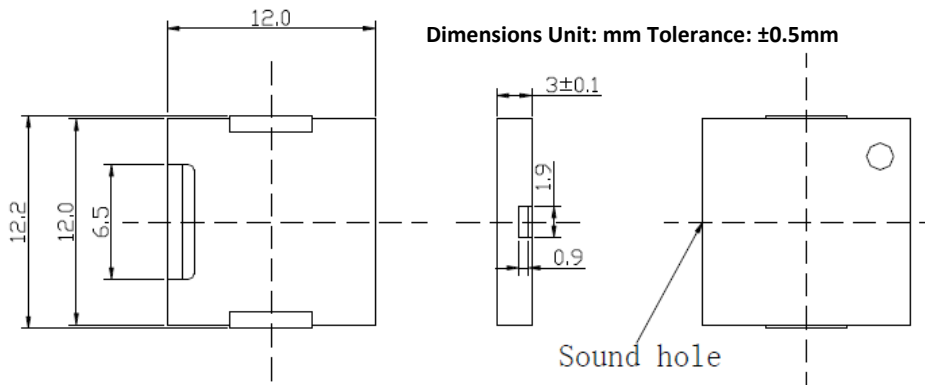

Art. Nr.
RND 430-00021