

Power Strip

6x F (CEE 7/3), 3 m, F (CEE 7/4)/Protective contact



Reconnectable with internal supply terminals

Impact resistant and halogen-free case

Flexible positioning in racks, rear walls and housing frame

Fastening clips included


SPECIFICATION:

No. of sockets	6
Socket type	F (CEE 7/3)
Colour	black
Cable length	3 m
Plug type	F (CEE 7/4)/Protective contact
Rated output	4 kW
Load capacity	16 A/230 VAC
Dimensions L x W x H	434 x 44.4 x 44.45 mm
Socket arrangement	Diagonal
Connecting cable	H05VV-F, 3G 1.5 mm ²
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical



Art. Nr.

RND 465-00207

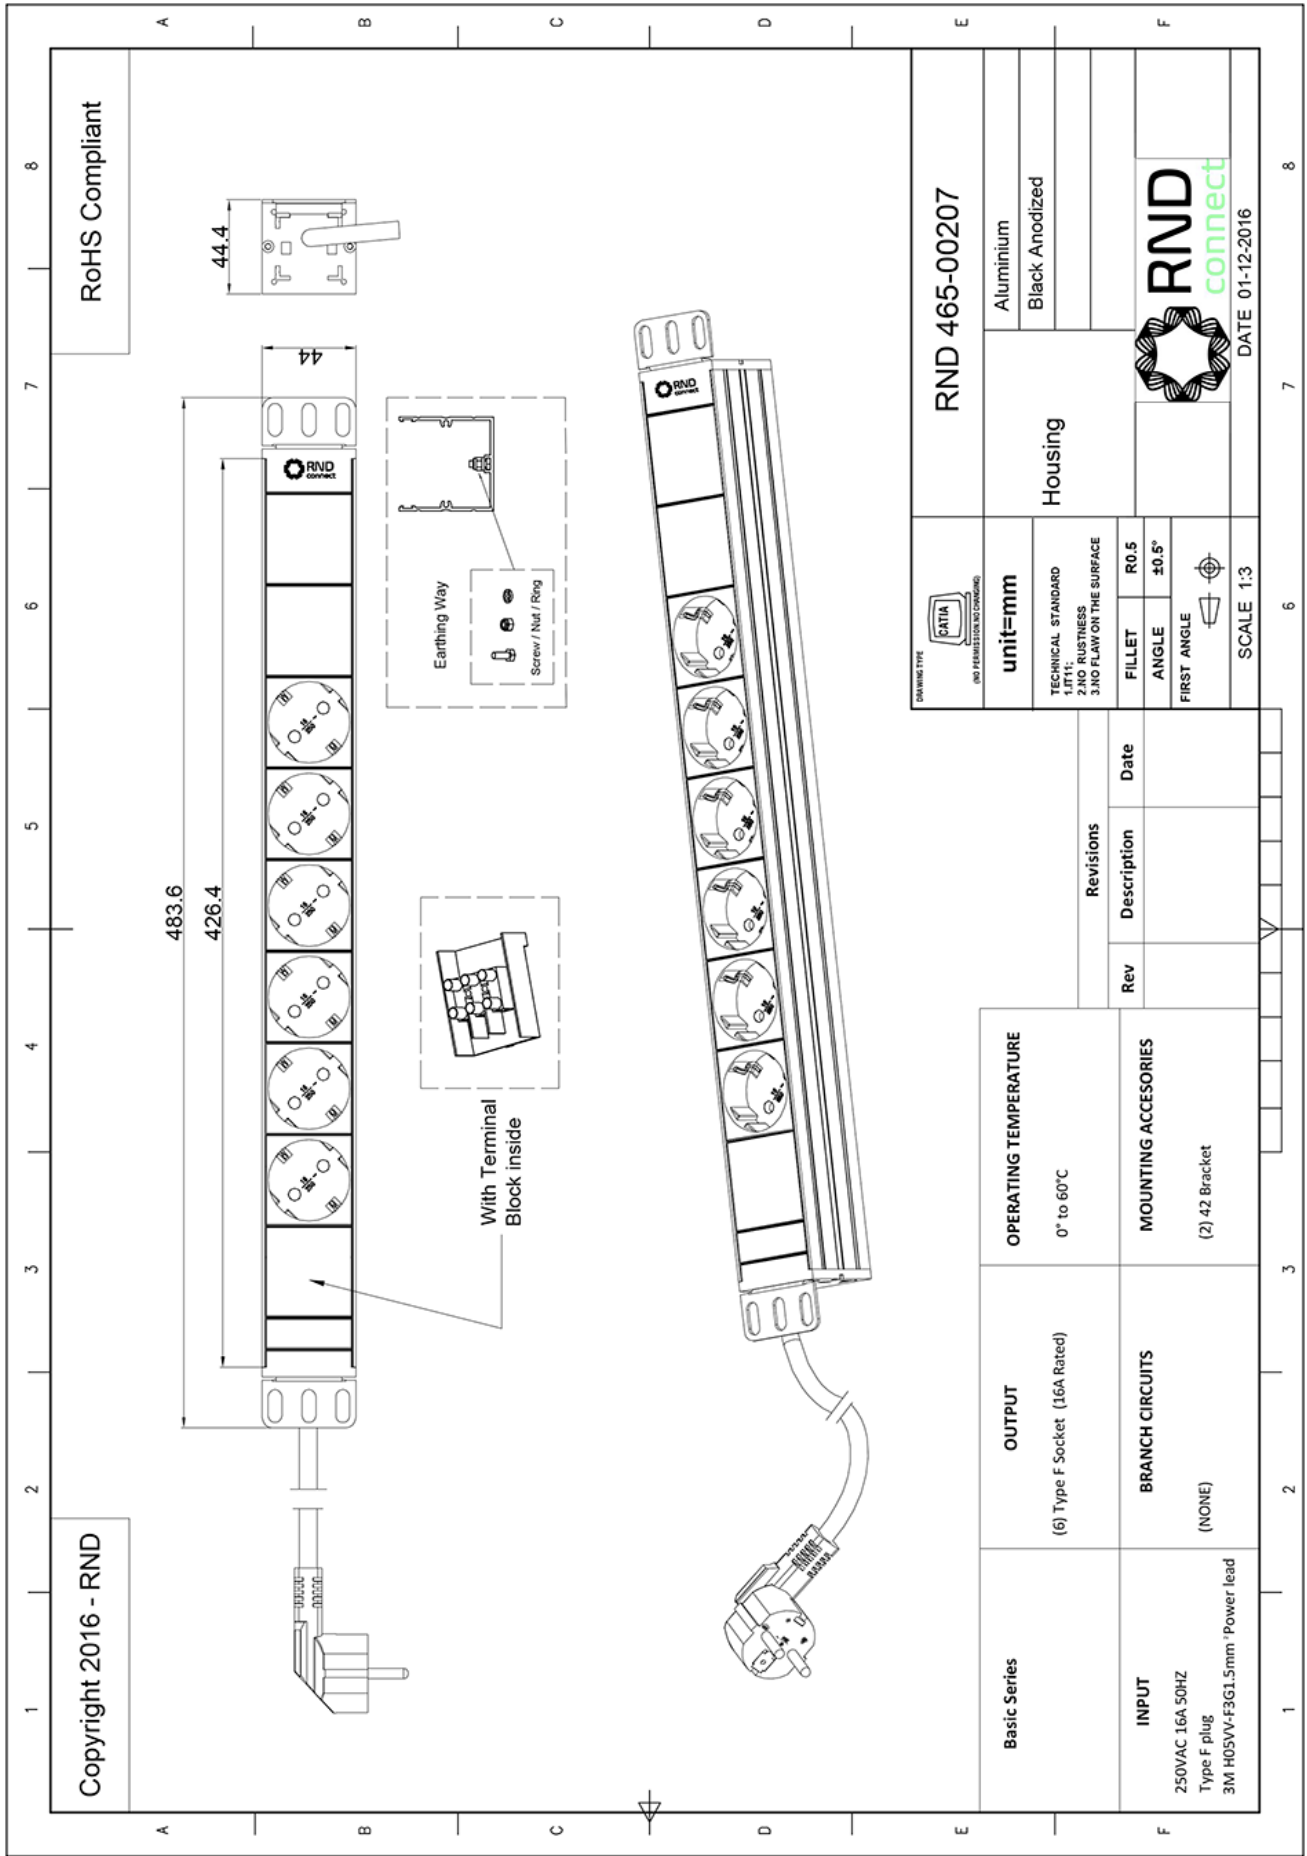

Copyright 2016 - RND

RoHS Compliant

483.6



426.4

44

44.4

With Terminal Block inside

Earthing Way
Screw / Nut / Ring

DRAWING TYPE CATIA (NO PERMISSION TO CHANGE)		RND 465-00207	
unit=mm		Aluminium Black Anodized	
TECHNICAL STANDARD 1. NO. RUSTINESS 2. NO. FLAW ON THE SURFACE 3. NO. FLAW ON THE SURFACE		Housing	
FILLET	R0.5	 RND connect DATE 01-12-2016	
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		6	8

Revisions			
Rev	Description	Date	

Basic Series	OUTPUT	OPERATING TEMPERATURE
	(6) Type F Socket (16A Rated)	0° to 60°C
INPUT	BRANCH CIRCUITS	MOUNTING ACCESSORIES
250VAC 16A 50HZ Type F plug 3M H05VV-F3G1.5mm Power lead	(NONE)	(2) 42 Bracket