

# Power Strip

10xT13, 3 m, Type 12/Protective contact



With 10 A protector (thermo fuse)  
Reconnectable with internal supply terminals  
Impact resistant and halogen-free case  
Flexible positioning in racks, rear walls and housing frame  
Fastening clips included  
In accordance with the Swiss Ordinance on Low-Voltage Electrical Equipment (CVEO), approved by the Swiss Federal Inspectorate for Heavy Current Installations  
For vertical mounting


## SPECIFICATION:

No. of sockets	10
Socket type	T13
Colour	Black
Cable length	3 m
Plug type	Type 12/Protective contact
Rated output	2.5 kW
Load capacity	10 A/230 VAC
Dimensions L x W x H	520 x 44.4 x 44.45 mm
Socket arrangement	Lengthwise
Connecting cable	H05VV-F. 3G 1 mm <sup>2</sup>
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Vertical
Certification	S+ ESTI 17.0241



**Art. Nr.**

**RND 465-00216**

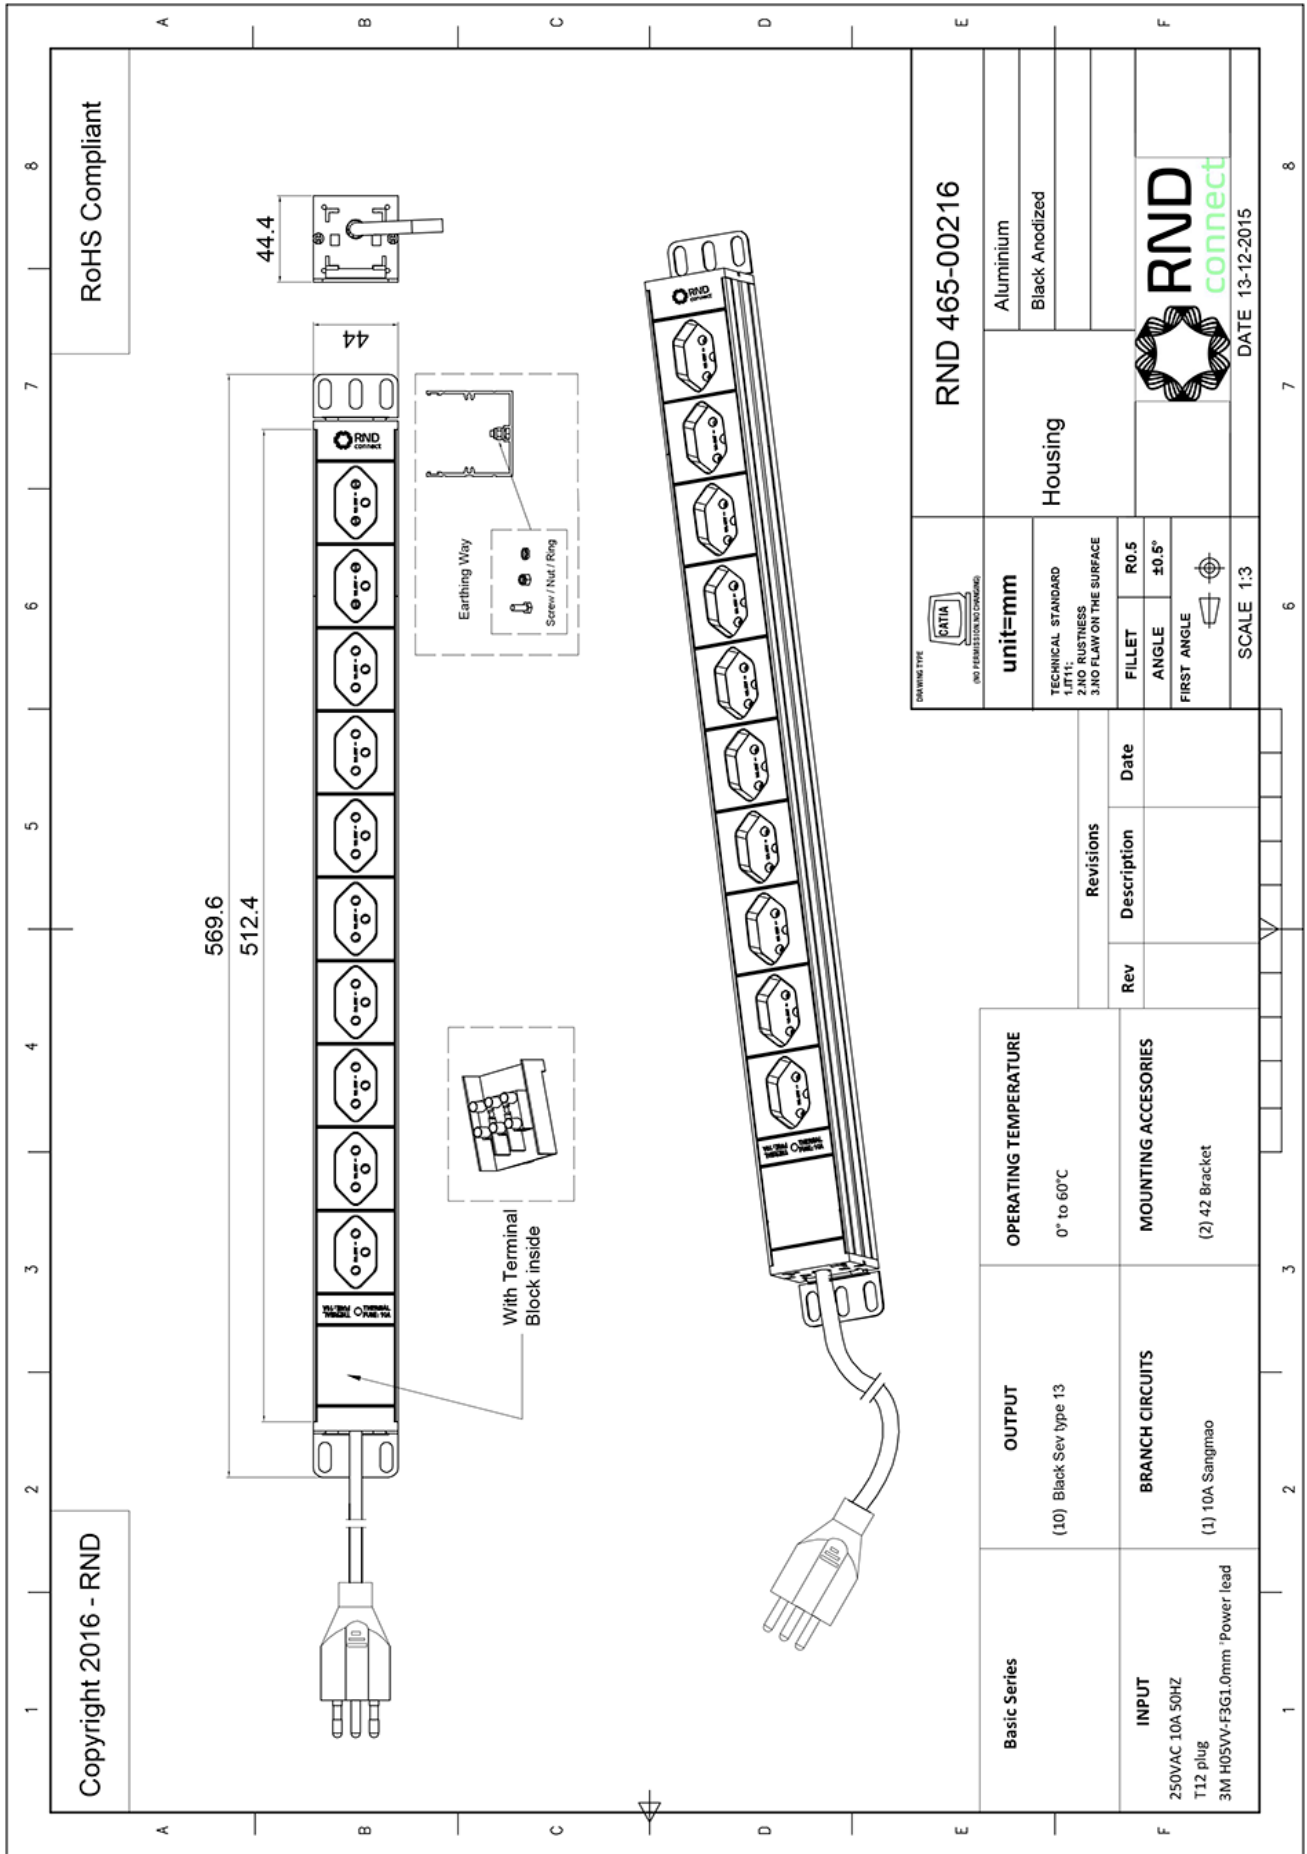

Copyright 2016 - RND

RoHS Compliant

569.6


512.4

44

With Terminal Block inside

Earthing Way

Screw / Nut / Ring

DRAWING TYPE CATIA (NO / PERMISSION TO CHANGE)		RND 465-00216	
unit=mm		Aluminium	
TECHNICAL STANDARD 1. NO. RUSTINESS 2. NO. FLAW ON THE SURFACE		Black Anodized	
FILLET R0.5		 <b>RND</b> connect	
ANGLE ±0.5°			
FIRST ANGLE			
SCALE 1:3		DATE 13-12-2015	

Revisions		
Rev	Description	Date

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
	(10) Black Sev type 13	0° to 60°C
<b>INPUT</b>	<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESSORIES</b>
250VAC 10A 50HZ T12 plug 3M H05VV-F3G1.0mm Power lead	(1) 10A Sangmao	(2) 42 Bracket