

Power Strip


8xT23, 3 m, C20/Protective contact




Reconnectable with internal supply terminals
Impact resistant and halogen-free case
Flexible positioning in racks, rear walls and housing frame
Fastening clips included
In accordance with the Swiss Ordinance on Low-Voltage Electrical Equipment (CVEO), approved by the Swiss Federal Inspectorate for Heavy Current Installations

SPECIFICATION:

No. of sockets	8
Socket type	T23
Colour	black
Cable length	3 m
Plug type	C20/Protective contact
Rated output	4 kW
Load capacity	16 A/230 VAC
Dimensions L x W x H	434 x 44.4 x 44.45 mm
Socket arrangement	Lengthwise
Connecting cable	H05VV-F. 3G 1.5 mm ²
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical
Certification	S+ ESTI 17.0241

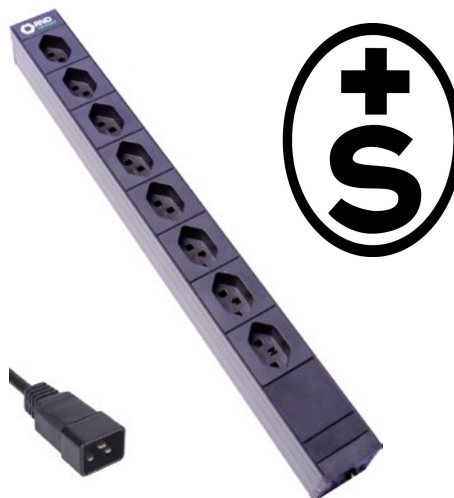

Art. Nr.
RND 465-00220

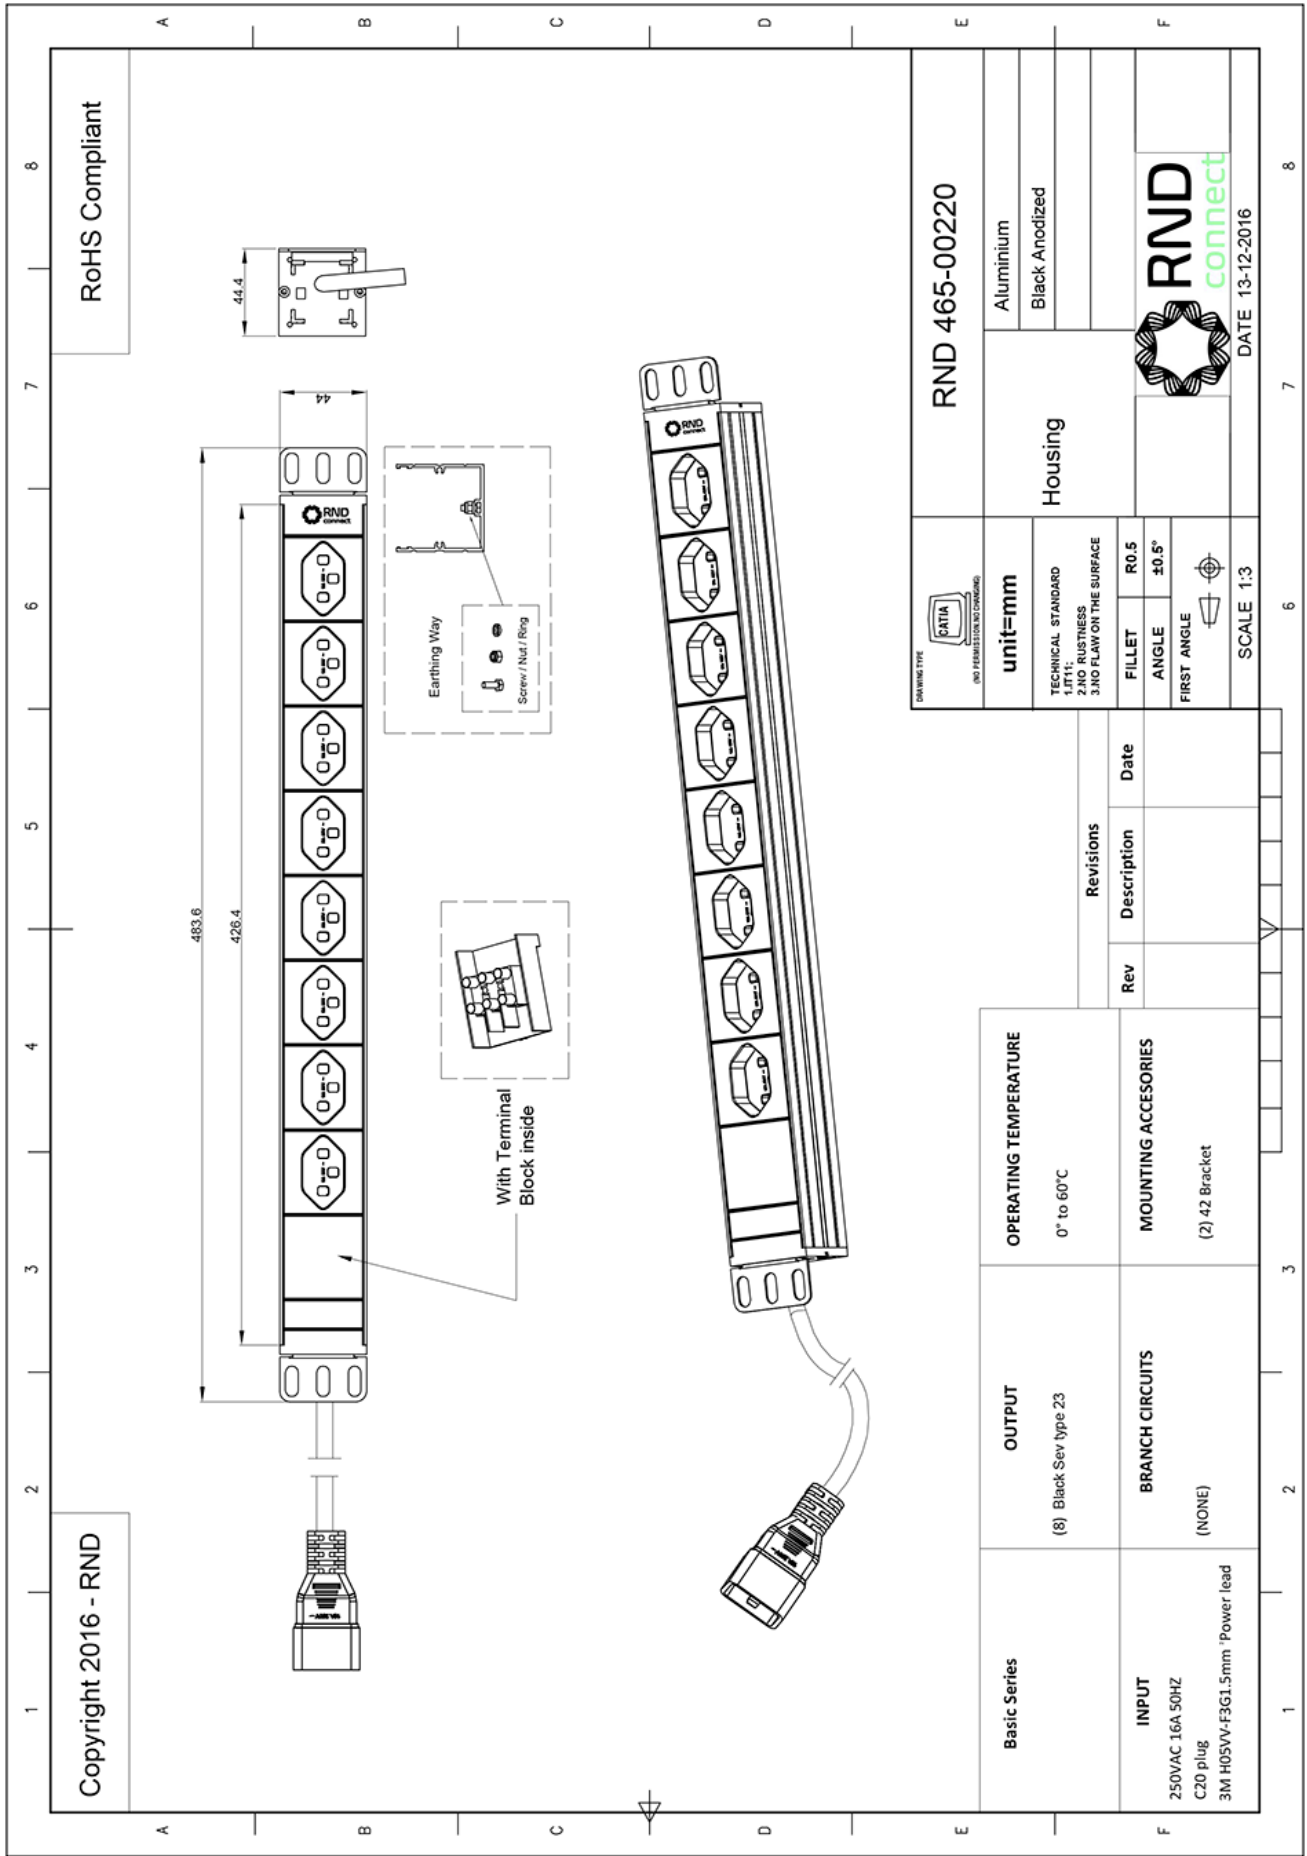

DRAWING TYPE CATIA (NO / PERMISSION TO CHANGE)		RND 465-00220	
unit=mm		Aluminium	
TECHNICAL STANDARD 1. NO. RUSTINESS 2. NO. FLAW ON THE SURFACE 3. NO. FLAW ON THE SURFACE		Black Anodized	
Fillet R0.5		Housing	
Angle ±0.5°			
First Angle		DATE 13-12-2016	
SCALE 1:3			

Revisions		
Rev	Description	Date

Basic Series	OUTPUT	OPERATING TEMPERATURE
INPUT 250VAC 16A 50HZ C20 plug 3M H05VV-F3G1.5mm Power lead	(8) Black Sev type 23	0° to 60°C
BRANCH CIRCUITS	MOUNTING ACCESSORIES	
(NONE)	(2) 42 Bracket	