

# Power Strip

8xC13, 3 m, F (CEE 7/4)/Protective contact



With 10 A protector (thermo fuse)

Reconnectable with internal supply terminals

Impact resistant and halogen-free case

Flexible positioning in racks, rear walls and housing frame

Fastening clips included


## SPECIFICATION:

No. of sockets	8
Socket type	C13
Colour	black
Cable length	3 m
Plug type	F (CEE 7/4)/Protective contact
Rated output	2.5 kW
Load capacity	10 A/230 VAC
Dimensions L x W x H	434 x 44.4 x 44.45 mm
Socket arrangement	Transverse
Connecting cable	H05VV-F, 3G 1.5 mm <sup>2</sup>
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical



**Art. Nr.**

**RND 465-00224**

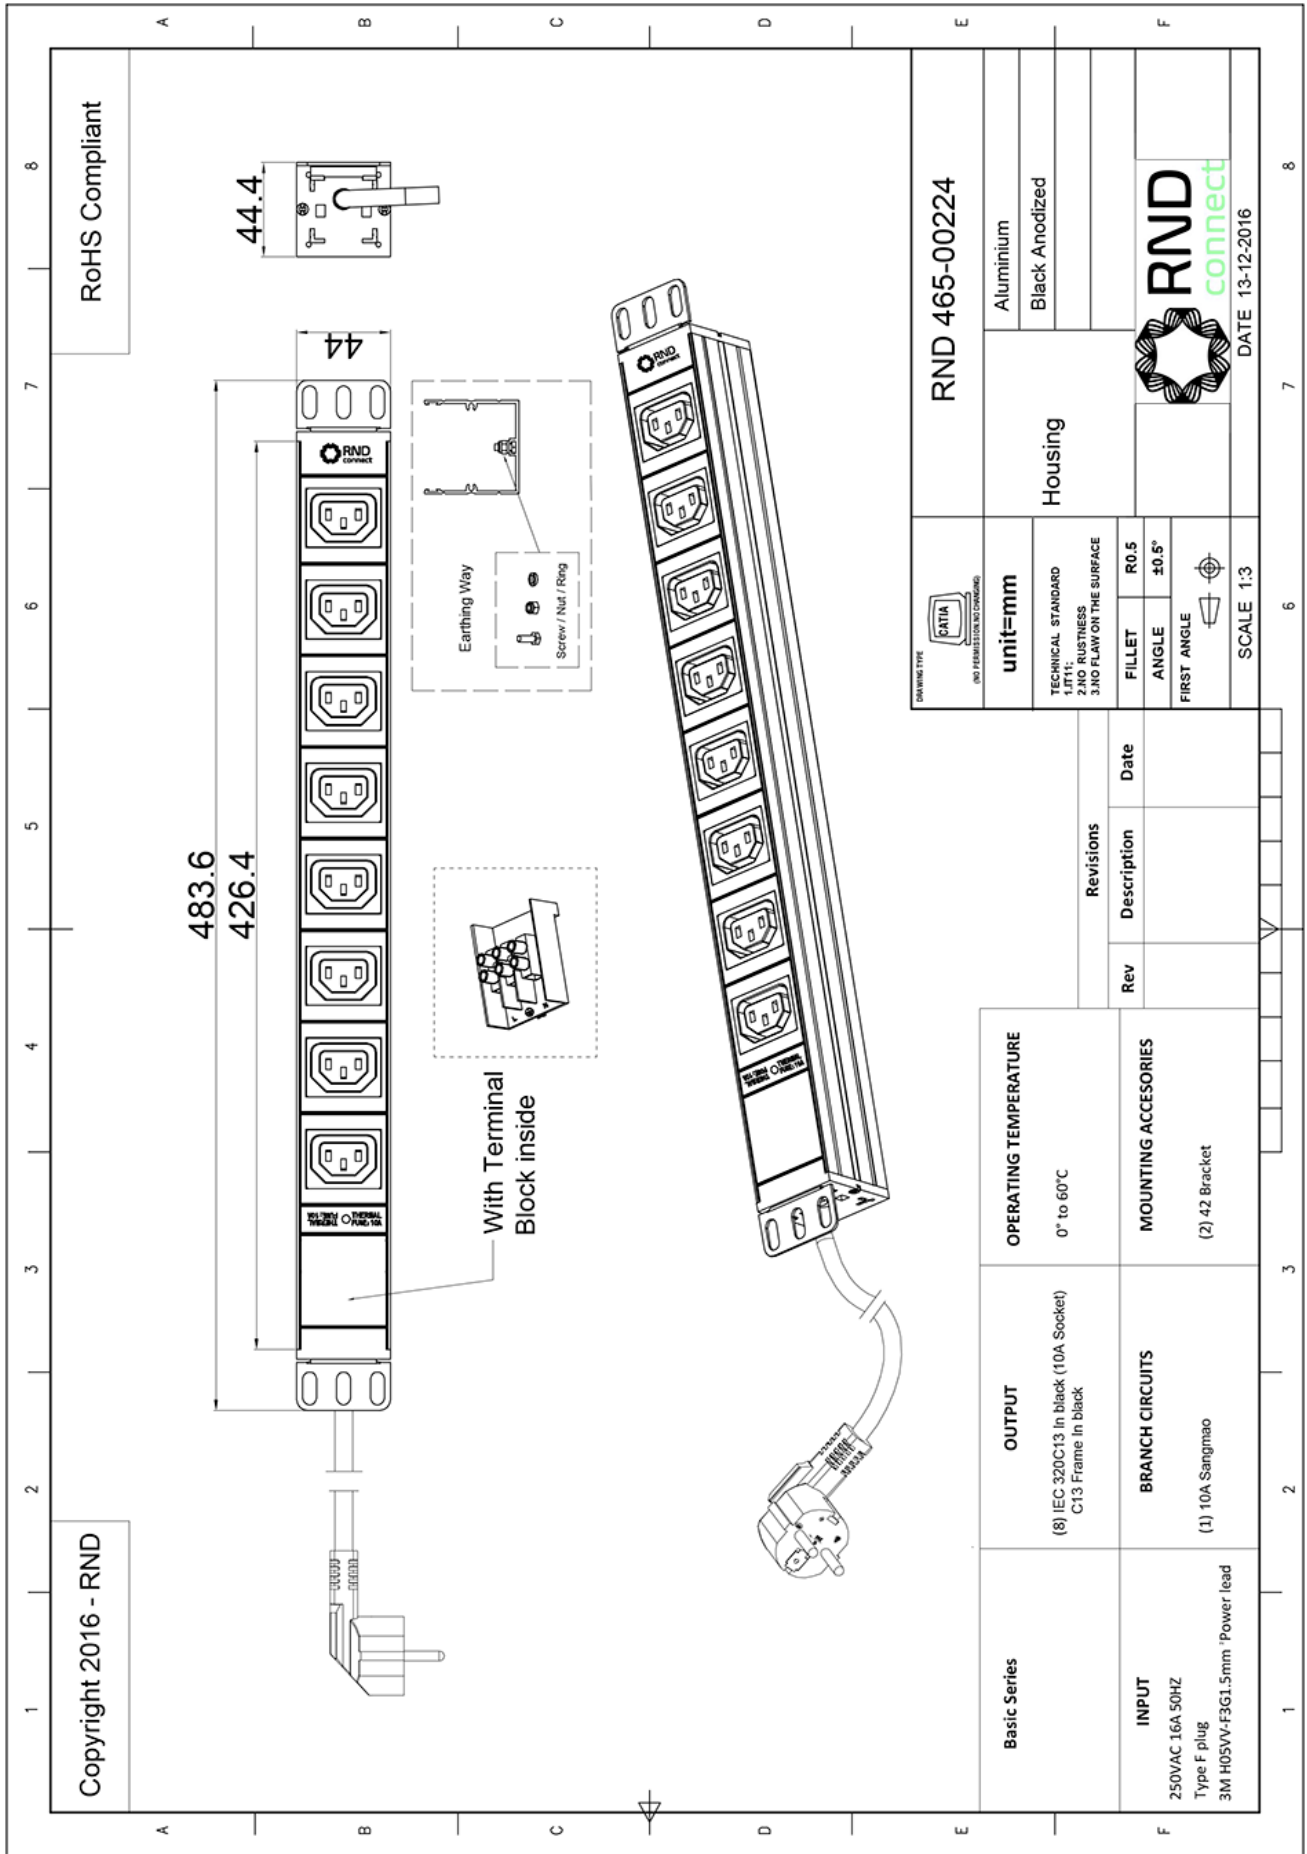

DRAWING TYPE CATIA (NO FEMOTION TO DRAWING)		RND 465-00224	
unit=mm		Aluminium	
TECHNICAL STANDARD 1. NO RUSTINESS 2. NO FLAW ON THE SURFACE		Housing	
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 13-12-2016	

Revisions		
Rev	Description	Date

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
	(8) IEC 320C13 In black (10A Socket) C13 Frame in black	0° to 60°C
<b>INPUT</b>	<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESSORIES</b>
250VAC 16A 50HZ Type F plug 3M H05VV-F3G1.5mm Power lead	(1) 10A Sangmao	(2) 42 Bracket