

Butt Splice Connectors

Heat shrink insulated




FEATURES:

Coated with hot-melt adhesive on the inside

SPECIFICATION:

Material	Copper
Surface material	Tin-plated
Max temperature	+105 °C

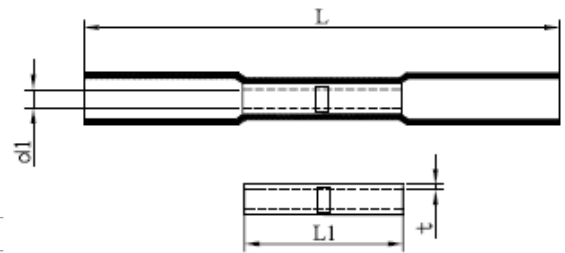

UL certified: E502427

PRODUCT RANGE:

Article Nr.	Cross-section	Colour	$d1 \pm 0.4 \text{ mm}$	$L \pm 3 \text{ mm}$	$t \pm 0.05 \text{ mm}$	$L1 \pm 0.5 \text{ mm}$
RND 465-00571	0.2...0.5 mm ²	Yellow	1 mm	24 mm	0.4 mm	11.7 mm
RND 465-00576	0.5...1.5 mm ²	Red	1.85 mm	36 mm	0.75 mm	15 mm
RND 465-00581	1.5...2.5 mm ²	Blue	2.5 mm	35.5 mm	0.8 mm	15 mm
RND 465-00582	4...6 mm ²	Yellow	3.6 mm	40.5 mm	0.95 mm	15 mm