


# Thin-Wall Heat Shrink Tubing

## Features

- Flexible, flame retardant, halogen free
- Crosslinked Polyolefin
- Shrink ratio: 2:1
- Flame retardant
- Low smoke emission
- Produces neither toxic smoke nor harmful substances, ideal for underground applications

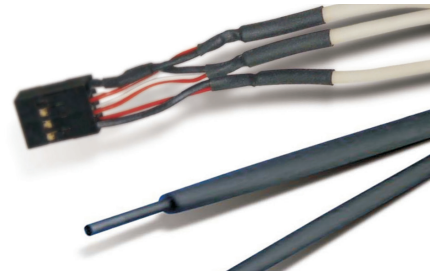

## Specification

Operating Temperature:	-55 ... 125 °C
Minimum Shrink Temperature	70 °C
Highest Heating Temperature	380 ... 400 °C
Minimum Full Recovery Temperature	100 °C
Longitudinal Change	0 ± 10% max.

## Product Range

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Reel / Meter
RND 465-01167	3.2	1.6	0.44	15
RND 465-01170	9.5	4.8	0.56	10
RND 465-01171	12.7	6.4	0.65	5
RND 465-01172	19.0	9.5	0.80	5