

# Tweezers

## Straight/Sharp/Fine, 120 mm

### Specification

- Austenitic steel (Material number 1.4301, DIN X5CrNi1810, AISI number 304)
- Contains from 17.5 to 20 wt% chromium and has important quantities of nickel
- Non-magnetizable
- Good corrosion resistance to a wide range of atmospheric environments and many corrosive media
- Generally used where corrosion resistance and toughness are primary requirements
- Typical applications include tweezers for the electronic industry, screws, machinery parts and food-handling equipment



### Composition

Component	Wt.%	Component	Wt.%	Component	Wt.%
C	≤0.08	Si	≤1.0	Mn	≤2.0
P	≤0.045	S	≤0.03	Cr	17.5-20.0
Mo	2.5-3.0	Ni	8.0-11.0		

### Mechanical Properties

State	annealed
Density	8.0 g/cm <sup>3</sup>
Hardness HB30	≤ 175
Hardness Rockwell B	84
Tensile strength, ultimate	600 MPa
Tensile strength, yield	330
0.2% Yield stress	≥ 290 MPa
Elongation, break	55%
Modulus of elasticity	193 GPa

### Thermal Properties

Coef. of lin. therm expansion	16.0 E-6/°C	20°C-100°C
Coef. of lin. therm expansion	17.0 E-6/°C	20°C-300°C
Specific heat capacity	0.50 J/(g·K)	
Thermal conductivity	16 W/(m·K)	
Continuous use temperature	350°C	
Max service temperature, air	925°C	

### Electrical Properties


Resistivity	0.72 E-4 Ohm.cm
-------------	-----------------

# Tweezers

## Straight/Sharp/Fine, 120 mm



### Product Dimensions

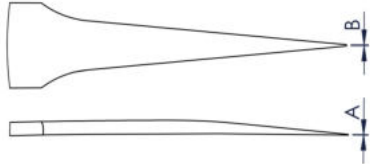

Product OAL (mm - in)	120.00 - 4.724
Product width (mm - in)	10.00 - 0.394
Product height (mm - in)	10.00 - 0.394
Tip thickness A (mm - in)	0.05 - 0.002
Tip width B (mm - in)	0.15 - 0.006
Net weight (g-lb)	16 - 0.035

### Art. Nr.

RND 550-00310