

Static Shielding Bag




Description

These open top, easy access static shielding bags are designed to protect sensitive electronic devices against ESD during transit and whilst kept in storage.

Features

- Metal “Faraday cage” layer shields products from electric energy inside and prevents static build-up
- Four layer protection guards against charges inside and out
- Semi transparent for easy content identification
- Surface resistance of 10^8 - $10^{11}\Omega$
- Conforms to EIA 625, EIA 541, ANSI/ESD S-20.20 & EN61340-51-ESD
- Custom sizes and print available on request
- Suitable for packing electronic products which are sensitive to static, eg PCBs, electronic components etc

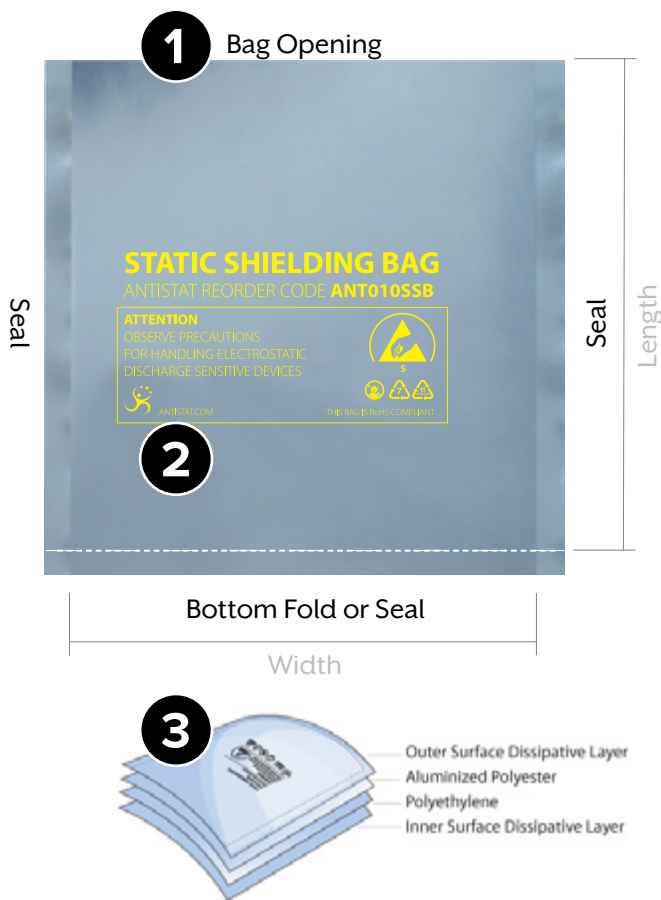

1 Configuration(s)

Our bags are available in custom sizes or in several industry standard sizes. Bags are offered in a 2-seal configuration and bottom fold, with our standard flexographically printed artwork. Please note any bags that are longer than 24" will have a 3rd seal along the bottom edge. Our bags can also be personalised with your company logo on any bespoke orders.

2 Standard Bag Artwork

Our static shielding bags are produced with the following sample artwork as standard. For further information on bespoke/printed orders, please contact one of our sales team. Please note there is a MOQ of 20,000 bags on all printed bags.

3 Construction

Our static shielding bags are constructed in four layers, consisting of a static dissipative polyester outer layer and a static dissipative polyethylene inner layer with a centre metallised shield layer.

Our bags are manufactured from industry approved polyester and polyethylene laminates. The polyester dielectric works with the metal layer to provide a Faraday effect, the metal layer preventing penetration from damaging electrostatic fields. The specially processed polyethylene keeps tribocharging to a minimum.

Static Shielding Bag



Test Conditions

The following results were taken under the following environmental test conditions:
Temperature: 23°C / Humidity: 12% RH

Technical Parameters:

Item	Test Standard	Result
Film Thickness	Micron Meter	3mils 75 micron
Metal Layer Optical Transmission	ASTM D1003 (TOBIAS)	40% +/- 5% optical density
Surface Resistivity	STM 11.11	<10 ¹⁰ Ω/sq
Time for static removal	FTMS 101B Method 4046 - 5000-0V	<.0.03 Sec
Static Shielding - Energy Penetration	ESD-STM-11.31 @12% R.H.	<20 nJ
Static Shielding - Capacitive Probe	EIA 541 Appendix E	<25V
Friction Static	EIA541 Appendix C Avg.	Triboelectric nanocoulombs Quartz +0.01 Tefion -0.09
Anti-erosion	FTMS 101C Method 3005	No visible spots
Tensile Strength	ASTM D882-91, Method A	MD 6530 psi TD 5800 psi
Tear Initiation	ASTM D1004 -94-Notched	MD 2.5 lbs./in TD 2.0 lbs
Puncture Resistance	ASTM D3420	>10 psi
Tear Resistance	ASTM D882	>8 psi
Burst Strength	FTMS 101 C Method 2065.1	50 psi nominal
Heat Seal Temperature	-	250 - 375 °F
Heat Seal Pressure	-	30-70 PSI
Heat Seal Strength	(D1876-93) Vertron bar sealer/heat	>12 lbs/in width (room temperature)
Breaking Elongation Rate	ASTM D882-91 Method A	MD 80% TD 85%
Appearance	GB/96-04-10	No delamination, burst seal, wrinkle, warp, break, foreign particle adherence, air bubble beyond sealing ≤3mm

Test Conclusion: (Date of Issue: 2009-11-10)

The shielding bag is tested accordance with the relevant test standard and requirements.

RoHS and REACH Compliance Statement:

All of Antistat's products are RoHS and Reach compliant.

Test Item	Test Method	Measured Equipment(s)	MDL
Lead (Pb)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Cadmium (Cd)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Mercury (Hg)	IEC 62321:2008 Ed.1 Sec.7	ICP-OES	2mg/kg
Hexavalent Chromium (Cr(VI))	IEC 62321:2008 Ed.1 Annex C	UV-Vis	2mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg

Static Shielding Bag



Product Code	Size (Inches)	Size (mm)	Additional Notes
RND 600-00024	3 x 5	76 x 127	Pack of 100
RND 600-00025	4 x 6	102 x 152	Pack of 100
RND 600-00026	4 x 12	102 x 305	Pack of 100
RND 600-00027	5 x 8	127 x 203	Pack of 100
RND 600-00028	5 x 26	127 x 660	Pack of 100
RND 600-00029	4 x 27	102 x 686	Pack of 100
RND 600-00030	6 x 8	152 x 203	Pack of 100
RND 600-00031	6 x 10	152 x 254	Pack of 100
RND 600-00032	6 x 12	152 x 305	Pack of 100
RND 600-00033	8 x 10	203 x 254	Pack of 100
RND 600-00034	8 x 12	203 x 305	Pack of 100
RND 600-00035	10 x 10	254 x 254	Pack of 100
RND 600-00036	10 x 12	254 x 305	Pack of 100
RND 600-00037	8 x 16	203 x 406	Pack of 100
RND 600-00038	12 x 16	305 x 406	Pack of 100
RND 600-00039	12 x 18	305 x 457	Pack of 100
RND 600-00040	14 x 16	356 x 406	Pack of 100
RND 600-00041	16 x 18	406 x 457	Pack of 100
RND 600-00042	18 x 18	457 x 457	Pack of 100
RND 600-00043	18 x 24	457 x 610	Pack of 100