

# Miniature Speaker



## Features

- ROHS compliant
- Housing material: Noryl
- Cone material: Mylar
- PCB mountable


## Applications

- Computer and peripherals
- Telecommunication units



## Specification

Rated Impedance	8±20% Ω
Rated Power	80 mW
Maximum Power	150 mW
Resonant Frequency	1500±20% Hz
Frequency Range	F 700 ... 4000 Hz
Sound Pressure Level at 0.1 W/100 mm	73±3 dB
Operating Temperature Min.	-20 °C
Operating Temperature Max.	85 °C
Storage Temperature Min.	-30 °C
Storage Temperature Max.	90 °C
Weight	5g±0.5 g

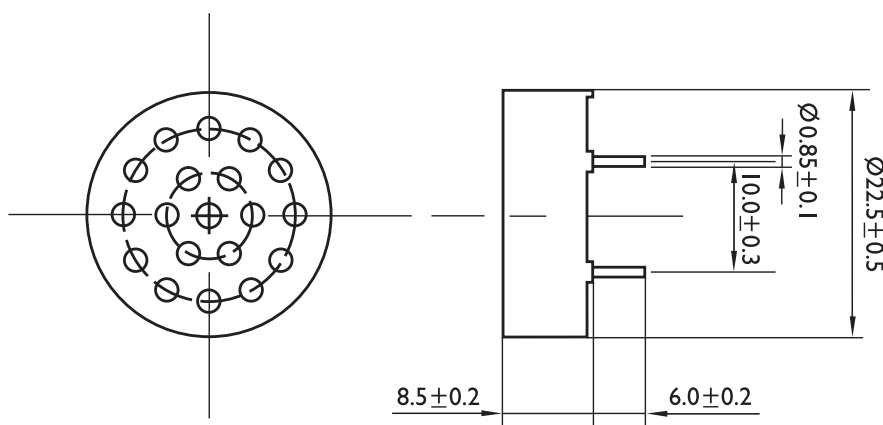


**Dimensions** Unit: mm Tolerance: ±0.3mm

# Miniature Speaker



## Frequency Curve

0.1W    0.5m    0.89V

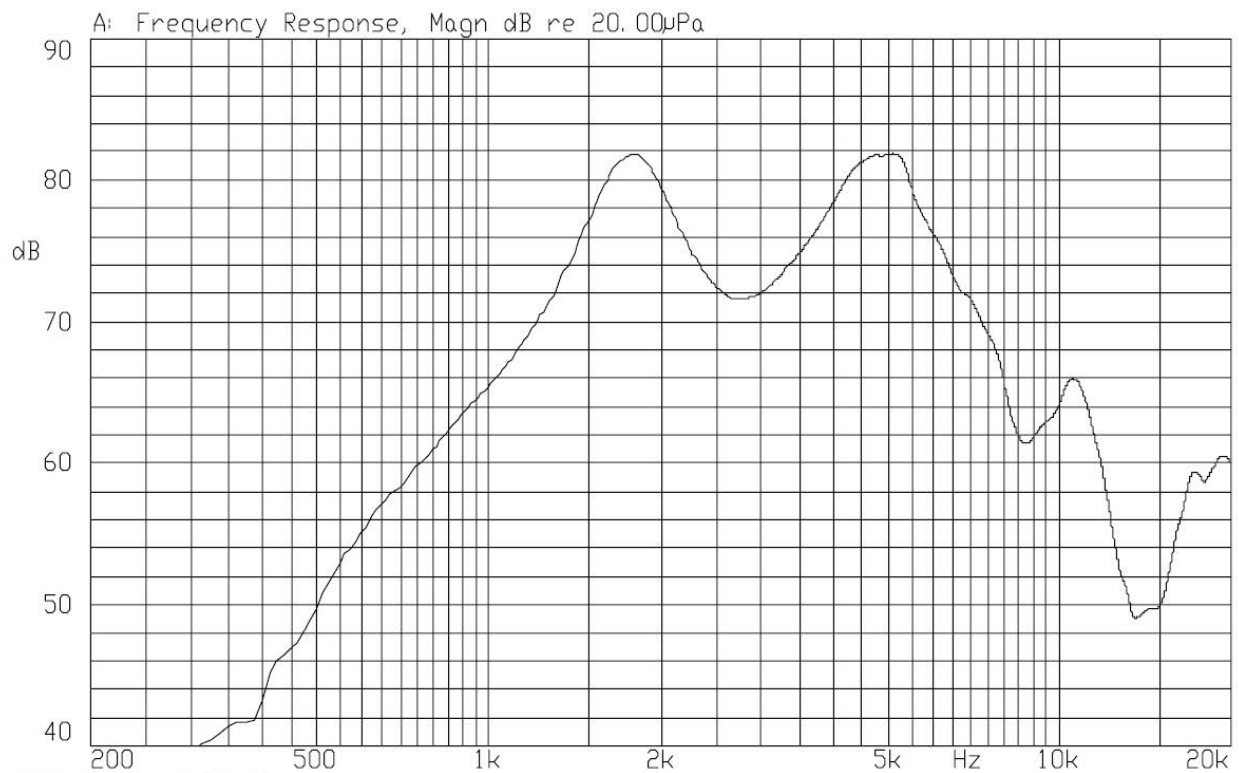

04-SEP-2007 15:33:30

Mode: TSR



**Art. Nr.**  
**RND 770-00001**