


# Pluggable Terminal Blocks

## 5 mm Pitch, Closed Ended

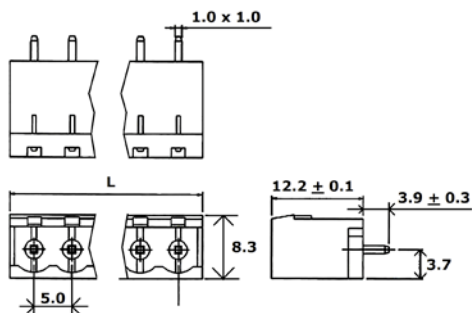

Closed ended  
Polarised Mouldings  
Guided pin alignment

### SPECIFICATION:

Gender of contacts	Male
Pitch	5 mm
Termination type	Solder Pin [PCB, Through-Hole]
Combustibility class	UL 94 V-0
Colour	green
Temperature range	-33...+120 °C

### PRODUCT RANGE:

Art. Nr.	Poles	Component type	Length	Connection direction
RND 205-00221	2	PCB header straight	11.2 mm	vertical
RND 205-00222	3	PCB header straight	16.2 mm	vertical
RND 205-00223	4	PCB header straight	21.2 mm	vertical
RND 205-00224	5	PCB header straight	26.2 mm	vertical
RND 205-00225	6	PCB header straight	31.2 mm	vertical
RND 205-00227	8	PCB header straight	41.2 mm	vertical
RND 205-00228	9	PCB header straight	46.2 mm	vertical
RND 205-00166	2	PCB header 90°	11.2 mm	horizontal
RND 205-00167	3	PCB header 90°	16.2 mm	horizontal
RND 205-00168	4	PCB header 90°	21.2 mm	horizontal
RND 205-00169	5	PCB header 90°	26.2 mm	horizontal
RND 205-00170	6	PCB header 90°	31.2 mm	horizontal
RND 205-00172	8	PCB header 90°	41.2 mm	horizontal
RND 205-00173	9	PCB header 90°	46.2 mm	horizontal