


► (RTS) Standard Bayonet Type
RTS-M08X08-L030-K02.M.0230




Max. operating temperature : -50 °C / +200 °C
Standard cable types : Silicone + Silicone
Sensor type : DIN/EN60751 Class "B" 1 x PT-100
Protection tube material : Aluminum

► Technical drawing

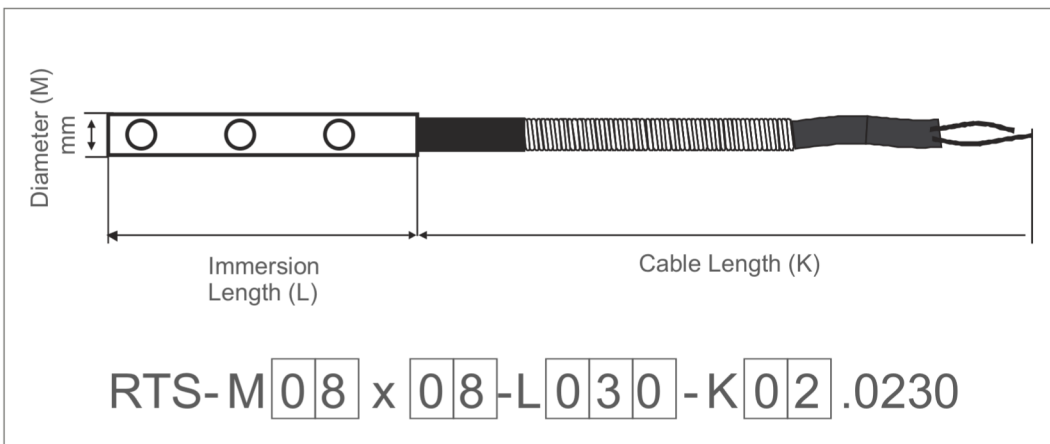

PT-100 Connections



Diameter (M) : 08 x 08 mm
Immersion Length (L) : 30 mm
Cable Length (K) : 2 meter