

PAGE 1/1

 ISSUE **04/06/15**

 SERIES **Flexible C/A**

 PART NUMBER **R285435000**

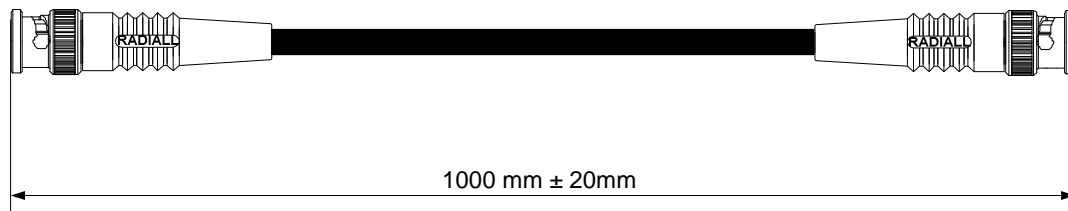
 CUSTOMER : **ALL**

SPECIFICATION :

-

ISSUE : -

DATE : -

*All dimensions are in mm*
*For more details, please see connectors TDS*

**CONNECTORS DESIGNATION**

 Connector 1: **R142085161 + boot**  
**BNC 75-COM Straight Plug**  
**Nickel plated Brass**  
**Torque wrench : NA**

 Connector 2: **R142085161 + boot**  
**BNC 75-COM Straight Plug**  
**Nickel plated Brass**  
**Torque wrench : NA**
**CABLE DESIGNATION**
**Flexible cable 6/75 black**
**PROTECTIVE JACKET**
**N/A**
**OUTER DIAMETER**
**6,25 mm max**
**MARKING**
**N/A**
**ELECTRICAL CHARACTERISTICS**

Characteristic impedance	<b>75 Ohms</b>
Frequency band :	<b>DC - 1 GHz</b>
Dielectric Withstanding Voltage:	<b>1500 Veff mini</b>
Voltage Rating:	<b>500 Vrms maxi</b>
Insulation Resistance	<b>5000 Mohms mini</b>

**MECHANICAL CHARACTERISTICS**

Min. Static bending radius :	<b>30 mm</b>
Life (Connectors) :	<b>100 Cycles</b>

**ENVIRONMENTAL CHARACTERISTICS**

Temperature range :	<b>-35°C to +70 °C</b>
---------------------	------------------------

In case of difference between the performances announced into the TDS and the customer specification, the TDS is the document of reference for the order.

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.