


ROHS-COMPLIANT

DISPLAYPORT MALE
INS:BLACK

DISPLAYPORT MALE
INS:BLACK

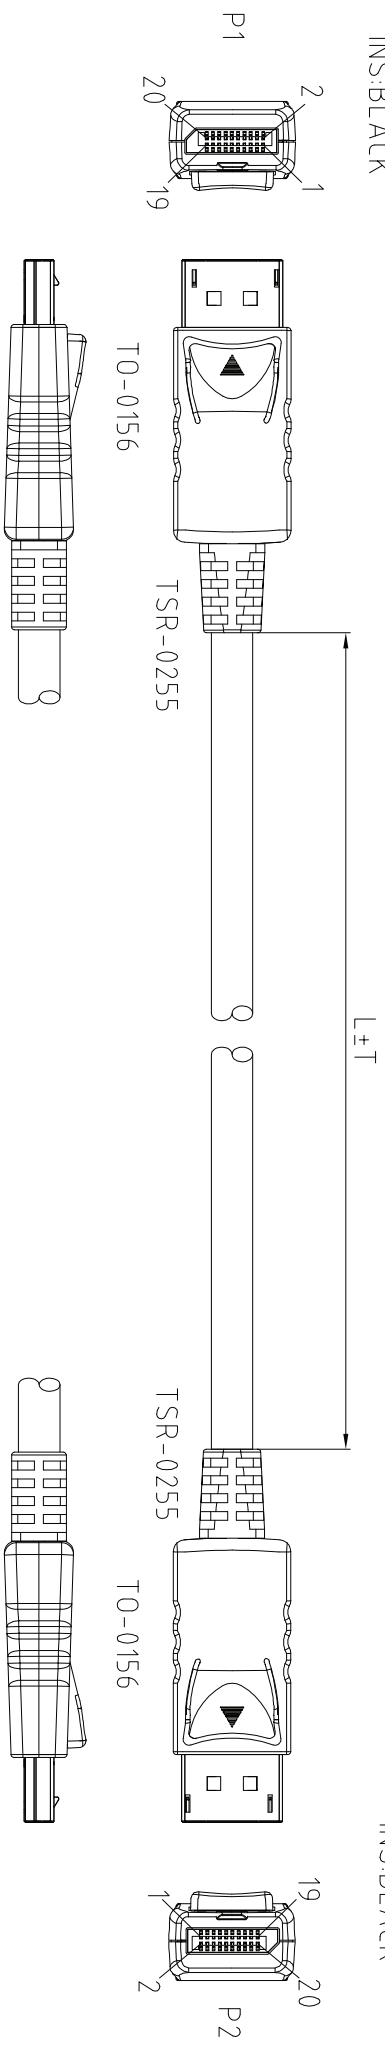

NOTE:

- 1.CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY +Hot-melt Mylar]×5C + #30(7/0.1 T.C)×4C INS:Polyethylene+AL/MY + B.D(85%) PVC JACKET; OD:6.5±0.2mm COLOR:MATT BLACK(NK-K01).
- 2.CONNECTOR:
P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15u"
SHELL:NI-PLATED.
- 3.SHIELD:INNER MOLD MUST BE WRAPPED COPPER T0 CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR:BLACK(NK-K01)
- 5.ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max.
(3)INSULATION RESISTANCE 10M ohm Min.
(4)HI-POT DC300V
- 6.PACKING:EACH PC / POLY BAG + HEADER CARD + BAR CODE LABEL.

200-1161-3	11.04.5605	5000	50	10	7611990186280
200-1161-2	11.04.5603	3000	30	20	7611990186273
200-1161-1	11.04.5602	2000	30	20	7611990186266
DWG	P/N	L(mm)	T(mm)	PCS/CTN	BAR CODE NO.

Tolerance Inch M/M	
X	.015 .30
XX	.010 .10
XXX	.005 .05
Draw	
FANNIE 01/14/09'	
Check	
Engr	
Title	
DISPLAYPORT ASS'Y CABLE	
Customer P/N	
App'd	Customer: T-RAG
Scale NONE	Units M/M
Dwg No. 200-1161	REV: A
	Sheet: 1/2

Rotronic co., LTD.

LTR	REV.	DESCRIPTION	DATE

PIN OUT

P1	P2	CABLE FUNCTION
1	12	ML_Lane 0(p)
3	10	ML_Lane 0(n)
2	11	GND
4	9	ML_Lane 1(p)
6	7	ML_Lane 1(n)
5	8	GND
7	6	ML_Lane 2(p)
9	4	ML_Lane 2(n)
8	5	GND
10	3	ML_Lane 3(p)
12	1	ML_Lane 3(n)
11	2	GND
15	15	AUX CH(p)
17	17	AUX CH(n)
16	16	GND
13	13	GND
14	14	GND
18	18	Hot Plug Detect
19	19	Return DP_PWR
SHELL	SHELL	

SHELL B.D

SHELL

Tolerance Inch M/M		Title	
.X	.015	.30	Rotronic co., LTD.
.XX	.010	.10	
.XXX	.005	.05	
Draw FANNIE 01/14/09'		DISPLAYPORT ASS'Y CABLE	
Check		Customer P/N	
App'd		Customer: T-RA6	
Scale NONE		Units M/M	
Dwg No. 200-1161		Third Angle Projection	
Engr		REV.A	
		Sheet 2/2	