



# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△K2	B	ECR # 110829-7 EDIT: CABLE SPEC, TITLE	08/29/11'

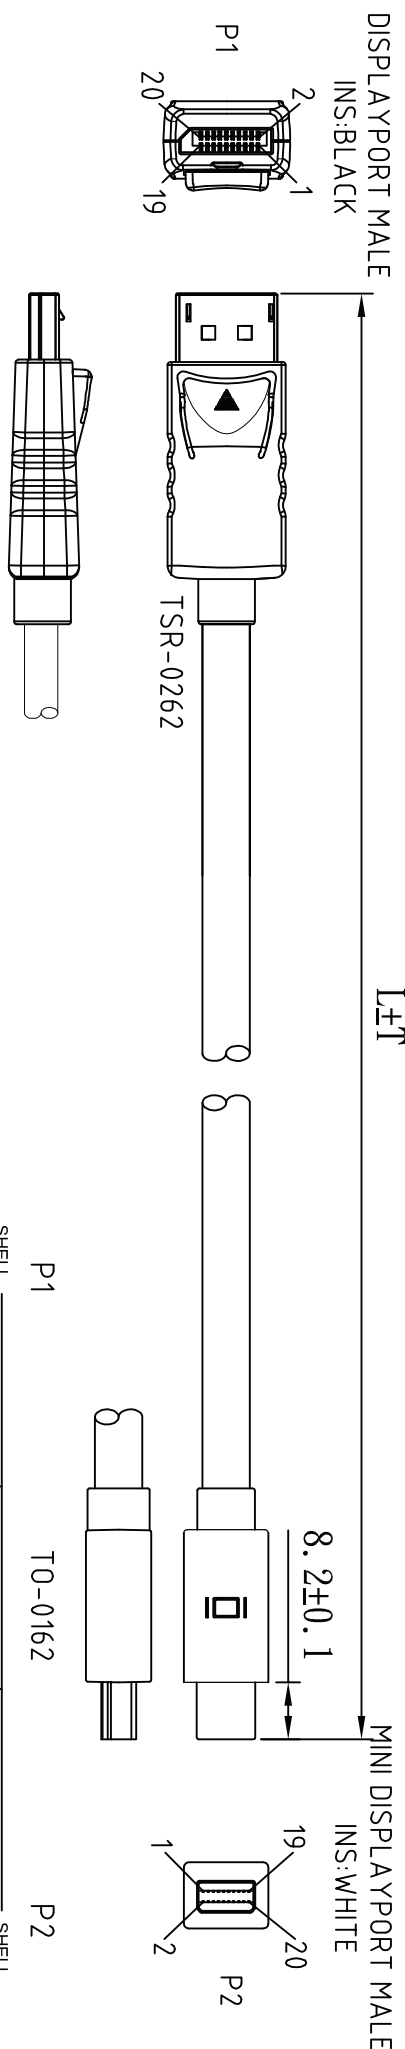

- NOTE:
- CABLE:UL20276 [32(7/0.08T.C)×1P INS:FOAM-SKIN-PE+D.W(7/0.08T.C)  
+Free-edge-al-foil/Mylar]×5C+#32(7/0.08T.C)×5C INS: PP+AL/MY  
+B.D(85%)PVC JACKET; OD:5.5±0.2mm COLOR:BLACK(NK-K01).
  - CONNECTOR:  
P1:DISPLAYPORT 20P MALE W/P/CB CONTACT:15U",SHELL:NI-PLATED.  
P2:MINI DISPLAYPORT 20P MALE CONTACT:15U",SHELL:NI-PLATED.
  - SHIELD: P1:INNER MOLD MUST BE WRAPPED COPPER TO  
CONNECTOR SHELL & CABLE BRAID  
P2:COPPER-FOIL 360° SOLDERED TO CONNECTOR  
SHELL & CABLE BRAID
  - HOOD:P1:ASS'Y TYPE, COLOR:BLACK(NK-K01)  
P2:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
  - ELECTRICAL TEST:  
<1>-100% OPEN SHORT & MIS WIRE TEST.  
<2>-CONTACT RESISTANCE 3 Ohms MAX.  
<3>-INSULATION RESISTANCE 10M Ohms MIN.
  - PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

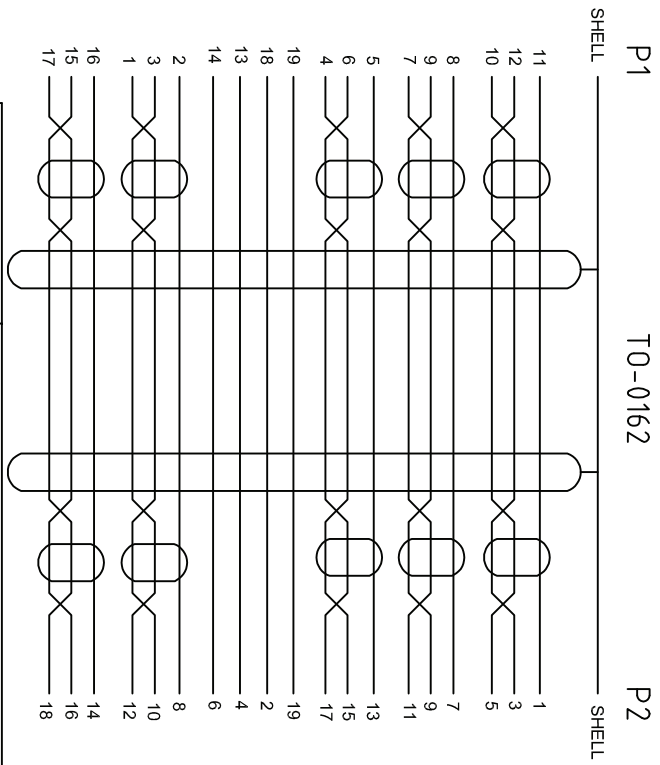

Part No.	Length (mm)	Width (mm)	PCS/INNER CARTON	PCS/CARTON
200-1447-3	11.04	5.637	10	20
200-1447-2	11.04	5.636	20	40
200-1447-1	11.04	5.635	20	40

Tolerance Inch M/M		Title	
X	.015 .30	DisplayPort - Mini DisplayPort CABLE(V1.2)	
XX	.010 .10	Customer P/N	
XXX	.005 .05	App'd	
Draw		Scale NONE	
FANNIE 08/29/11'		Units M/M	
Check		Customer: T-RAG	
Engr		Third Angle Projection	
Dwg No. 200-1447		REV: B	
		Sheet 1/1	

**Rotronic Co., LTD.**