


Xmore® SSD 2,5" SATA III

Product description



Xmore® Partnumber	SSD060GXACTT-003Z	SSD240GXACTT-005Z
	SSD120GXACTT-003Z	SSD480GXACTT-005Z
		SSD960GXACTT-005Z
		SSD002TXACTT-005Z
		SSD004TXACTT-009Z
		SSD008TXACTT-009Z
Flash Type	Toshiba BiCS 3 3D TLC	
Capacity	60 GB up to 8 TB	
SATA Interface	SATA Revision 3.0 SATA 1.5Gbps, 3Gbps, and 6Gbps	
Power Consumption	Active mode:	> 3000mW
	Idle mode:	> 210mW
	DEVSLP mode	< 5mW
Performance Sequential *960GB	Read:	Up to 550 MB/s
	Write:	Up to 490 MB/s
Advance Flash Management	Static and Dynamic Wear-Leveling Bad-Block Management TRIM // S.M.A.R.T Over-Provision LDPC ECC Engine Read-Refresh Algorithmen	
TBW (Terabytes Written)	4388 TBW for 960GB	
Temperature Range	Storage:	-40°C to 85°C
	Operation:	0°C to 70°C
RoHS compliant		

Technical draw

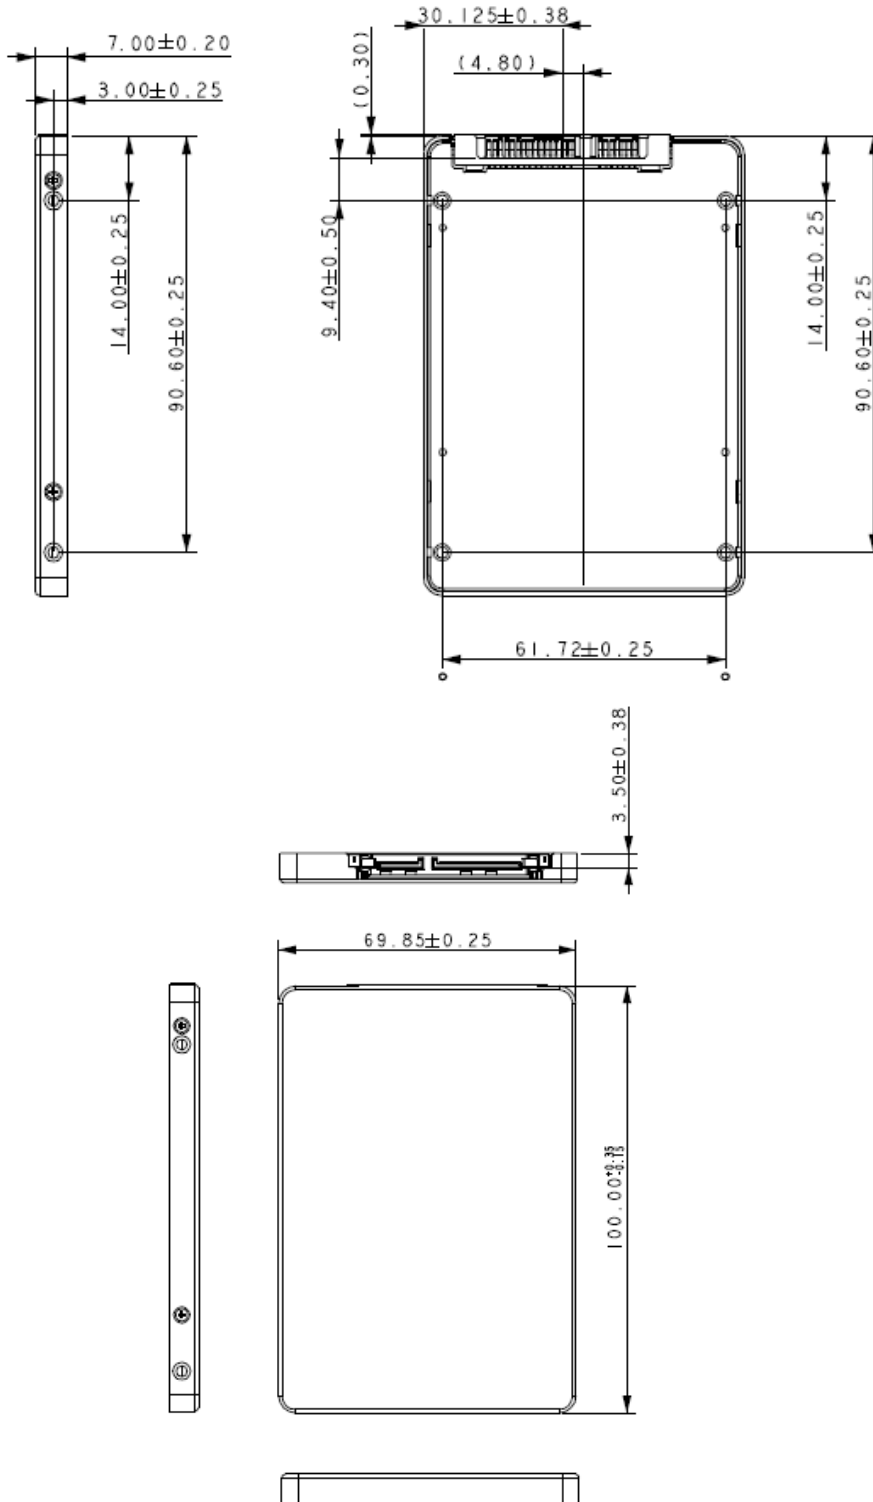

Note: Xmore® reserves the right to change non BoM parts without notice.