

Non-Isolated DC/DC Converter (POL)

TSR 0.6WI Series, 0.6 A

- Ultra wide 8:1 input voltage range:
9-72 VDC**
- Covers a majority of standard bus- and
battery voltages**
- Up to 94% efficiency - No heatsink
required**
- Pin compatible with LMxx linear
regulators (SIP-3)**
- Operating temperature range
-40 to +85°C**
- Low standby current**
- Excellent line/load regulation**
- Protection against short circuit,
overvoltage and overtemperature**
- 3-year product warranty**



The TSR 0.6WI is a non-isolated POL converter series with an ultra wide 8:1 input voltage range which comes in a standard SIP-3 package. Covering the majority of standard bus- and battery voltages this POL converter is a versatile solution for many applications in distributed power systems where different input voltages have to be handled. Being able to use the same converter in many different situations effectively reduces the bill of material (BOM) of a given application. A high efficiency of up to 94% allows for an operating temperature range of -40 to +85°C (up to 80°C without derating) and makes them excellent drop-in replacements for less efficient LMxx linear regulators. With 0.6A max. output current and standard features such as low standby current, precise regulation and protection against short circuit, overvoltage and overload the TSR 0.6WI is suitable for many battery and distributed power applications.

Models

Order Code	Output Current max.	Input Voltage Range	Output Voltage nom.	Efficiency typ.
TSR 0.6-4833WI	600 mA	9 - 72 VDC (48 VDC nom.)	3.3 VDC	85 % (at 24 Vin)
TSR 0.6-4850WI		14 - 72 VDC (48 VDC nom.)	5 VDC	89 % (at 24 Vin)
TSR 0.6-4865WI		17 - 72 VDC (48 VDC nom.)	6.5 VDC	91 % (at 24 Vin)
TSR 0.6-4890WI		20 - 72 VDC (48 VDC nom.)	9 VDC	92 % (at 24 Vin)
TSR 0.6-48120WI		33 - 72 VDC (48 VDC nom.)	12 VDC	93 % (at 24 Vin)
TSR 0.6-48150WI			15 VDC	94 % (at 24 Vin)
TSR 0.6-48240WI	400 mA		24 VDC	94 % (at 48 Vin)

Options

on demand (backorder with MOQ) non stocking item)	- Horizontal mounting (see outline dimensions)
--	--

Input Specifications

Input Current	- At no load	3 mA typ.
Recommended Input Fuse		3.3 Vout models: 800 mA (slow blow) 5 Vout models: 800 mA (slow blow) 6.5 Vout models: 1'000 mA (slow blow) 9 Vout models: 1'000 mA (slow blow) 12 Vout models: 1'000 mA (slow blow) 15 Vout models: 1'000 mA (slow blow) 24 Vout models: 800 mA (slow blow)
Input Filter	See application note:	www.tracopower.com/overview/tsr0-6wi (Recommended external input filter proposal)

Output Specifications

Voltage Set Accuracy	$\pm 2.5\%$ max.	
Regulation	- Input Variation (Vmin - Vmax)	0.9% max.
	- Load Variation (10 - 100%)	0.6% max.
Ripple and Noise (20 MHz Bandwidth)	3.3 Vout models: 50 mVp-p typ. 5 Vout models: 50 mVp-p typ. 6.5 Vout models: 50 mVp-p typ. 9 Vout models: 50 mVp-p typ. 12 Vout models: 50 mVp-p typ. 15 Vout models: 50 mVp-p typ. 24 Vout models: 75 mVp-p typ.	
Capacitive Load	100 μ F max.	
Minimum Load	Not required	
Temperature Coefficient	$\pm 0.02\%$ /K max.	
Start-up Time	50 ms typ. (24 Vout model) 25 ms typ. (other models)	
Short Circuit Protection	Continuous, Automatic recovery	
Output Current Limitation	200% typ. of Iout max.	
Transient Response	- Peak Variation	180 mV max. (50% Load Step)
	- Response Time	200 μ s typ. (50% Load Step)

General Specifications

Relative Humidity	95% max. (non condensing)	
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	3.57 %/K above 77°C
Over Temperature Protection	- Protection Mode	165°C typ. (Automatic recovery)
Protection Switch Off	- Measurement Point	Internal IC temperature
Cooling System	Natural convection (20 LFM)	
Switching Frequency	117 - 243 kHz (PWM) (3.3 Vout model) 130 - 270 kHz (PWM) (5 Vout model) 163 - 338 kHz (PWM) (6.5 Vout model) 195 - 405 kHz (PWM) (9 Vout model) 247 - 513 kHz (PWM) (12 Vout model) 293 - 608 kHz (PWM) (15 Vout model) 416 - 864 kHz (PWM) (24 Vout model)	
Insulation System	Non-isolated	
Reliability	- Calculated MTBF	18'160'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	MIL-STD-810F
	- Mechanical Shock	MIL-STD-810F
	- Thermal Shock	MIL-STD-810F
Housing Material	Non-conductive Plastic	

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Potting Material	Epoxy (UL 94 V-0 rated)
Connection Type	THD (Through-Hole Device)
Weight	3 g
Environmental Compliance	<ul style="list-style-type: none"> - Reach - RoHS
	www.tracopower.com/info/reach-declaration.pdf
	www.tracopower.com/info/rohs-declaration.pdf


Supporting Documents

Overview Link (for additional Documents)


www.tracopower.com/overview/tsr0-6wi

Outline Dimensions

Standard: Vertical mounting

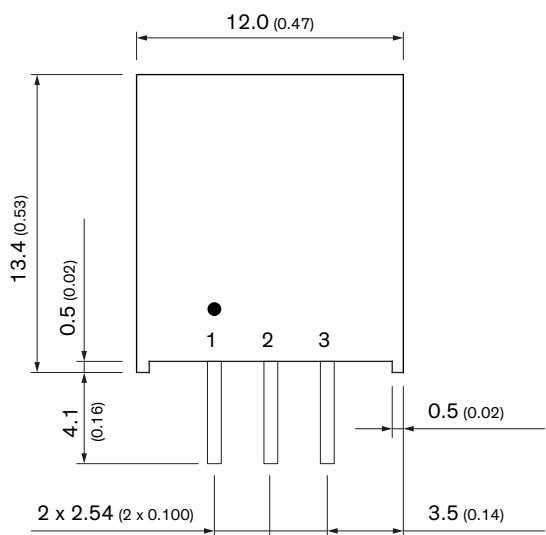


Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout

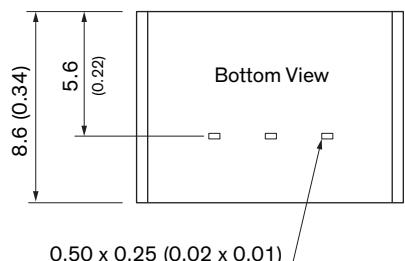


Dimensions in mm (inch)
Tolerances: x.xx ± 0.5 (± 0.02)
Tolerances: x.xxx ± 0.25 (± 0.01)
Pin dimension tolerances: ± 0.10 (± 0.04)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Optional: Horizontal mounting

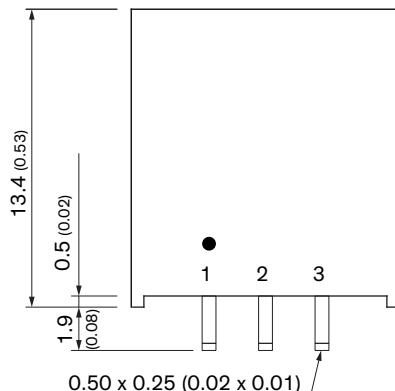

Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout

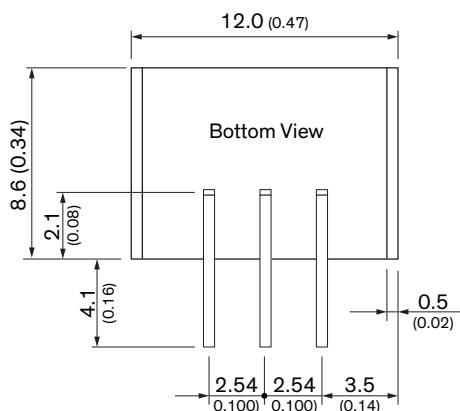

Dimensions in mm (inch)
 Tolerances: x.xx ± 0.5 (± 0.02)
 Tolerances: x.xxx ± 0.25 (± 0.01)
 Pin dimension tolerances: ± 0.10 (± 0.04)