

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® TSK 1060 Super – UL Style 20276

HDMI 2.0 Cable with Ethernet 3D 4K

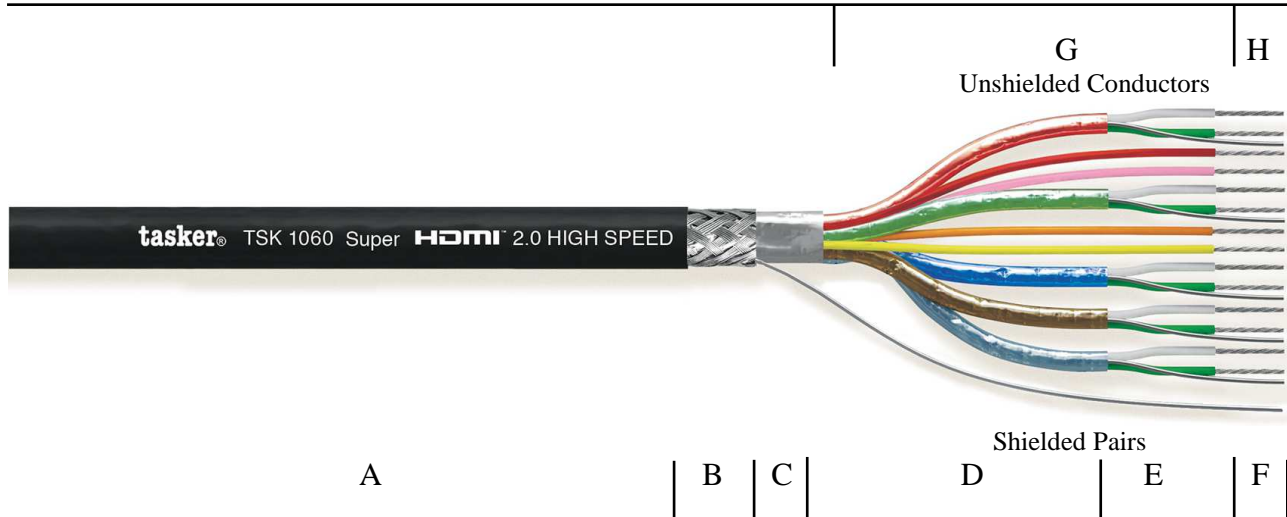

CATEGORY HDMI Cable (See Audio Catalogue)
APPLICATIONS High definition video transmission with Ethernet on HDMI 2.0 protocol

- A:** Black Soft PVC Sheath – Outer Diam. Ø 8,50 (±0,20) mm.
- B:** First Shield on the grouping in O.F.C. tinned copper Braid covering 80%.
+ tinned Copper drain Wire.
- C:** Second Shield on grouping in aluminum/Mylar tape covering 125%.

Shielded Pairs

- D:** The pairs are shielded with colored aluminum/Mylar tape covering 100% + tinned copper Drain Wire.
Color of the tape: Red, Green, Blue, Brown e Silver.
- E:** Core insulated in foam PE smooth finished (skin).
Colored one green and one white. Diam. Ø 1,30 (±0,20) mm.
- F:** Stranded O.F.C. tinned copper formation 7x0,16 mm.
Nom section 5x2x0,14 mm².

Unshielded Conductors

- G:** The 4 unshielded conductors are insulated with HDPE.
Diam. Ø 0.90 (±0,20) mm.
Insulation colors: Red, Pink, Orange and Yellow.
- H:** All unshielded conductors are made of O.F.C. tinned copper,
formation of 7x0,16 mm. – Nom. sections 4x0,14 mm².



MILAN S.r.l. a socio unico

Head Office – Export department: **Ufficio Commerciale e Centro Distribuzione**
 Viale Europa, 74 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059
 F. +39 02 9039.4551 F. +39 02 9039.0049
 www.taskercables.com www.tasker.it

MARKING

tasker® TSK 1060 Super HIGH SPEED HDMI® 2.0 With Ethernet • DOUBLE SHIELDING
 • Sect. (5x2) +4x26AWG E324540 9U AWM STYLE 20276 80° 30V. VW - 1

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductors Resistance	138 Ω/km
Impedance	100 Ω
Max Rated Voltage	30 V
Operative Temperature	-15+70°C

Attenuation dB/10mt.

From 1,0 to 825,0 MHz	5,0
From 825 to 2.475 MHz	12,0
From 2475 to 4125 MHz	20,0
From 4125 to 5,100 MHz	25,0

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			