


EX-EMVS 25

Ex stop end, brass nickel-plated, with O-ring EPDM, M25



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

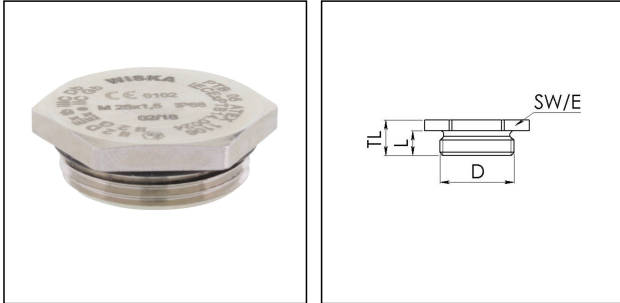

Material	Brass nickel-plated
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	120 °C
Protection class	IP66 / IP68 (5 bar 30 min)
Marking	II 2 G Ex e IIC Gb, II 2 D Ex tb IIIC Db
Approval	PTB 05 ATEX 1106, IECEx PTB 14.0024
Thread type	M
Ø Connection thread D	25
Lead	1,5
Length screw-in thread L	6,5 mm
Key width SW	28 mm
Collar diameter (E)	32 mm
Total length TL	10 mm
Surface	Nickel-plated
Order no. nickel-plated	10065334
Type	EX-EMVS 25
Packing unit	10
ETIM-Classification	EC000032

Recommended accessories

EMMU 25	10063144
---------	----------

13.08.2019


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

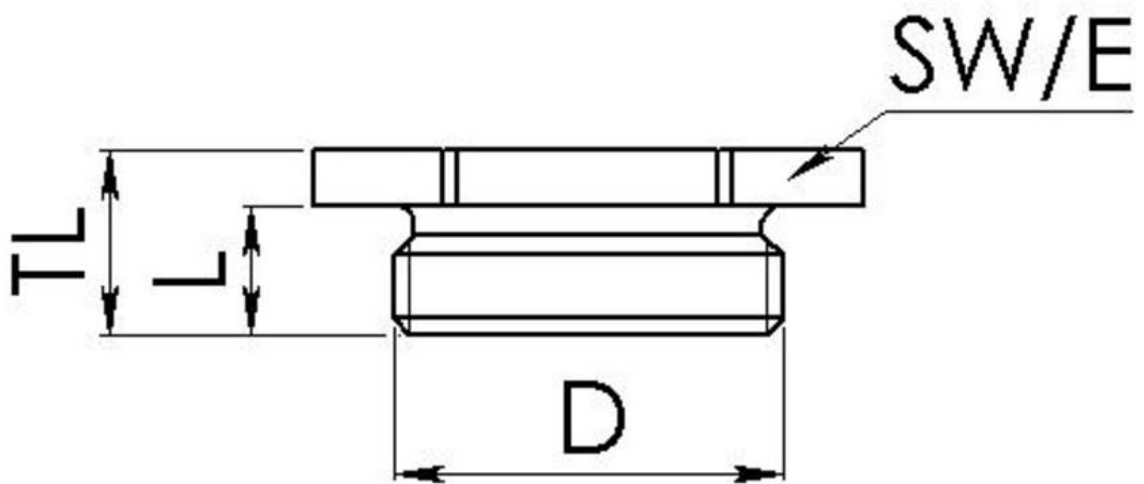

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk