

## Modular Signal Towers / KombiSIGN 72

### Siren element 8 tne 24VAC/DC GY



Part No.:	645.790.75
Series:	KombiSIGN 72



#### MECHANICAL DATA

Height	54 mm
Diameter	70 mm
Materials	PC
Housing colour	Grey
Protection category	IP65
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	93 g
Product weight	73 g

#### ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	30 mA
Rated inrush current	250 mA
Protection class	Protection class 2
Pollution degree	3

#### ACUSTICAL DATA


Volume/dB(max) at 1m distance	102,0 dB (A)
Acoustic signal image	Multi-tone
Number of tones	8 tone
Volume adjustable	Switch
Volume adjustment range	92 - 102 dB (A)



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72  
**Siren element 8 tne 24VAC/DC GY**

**DRAWING**

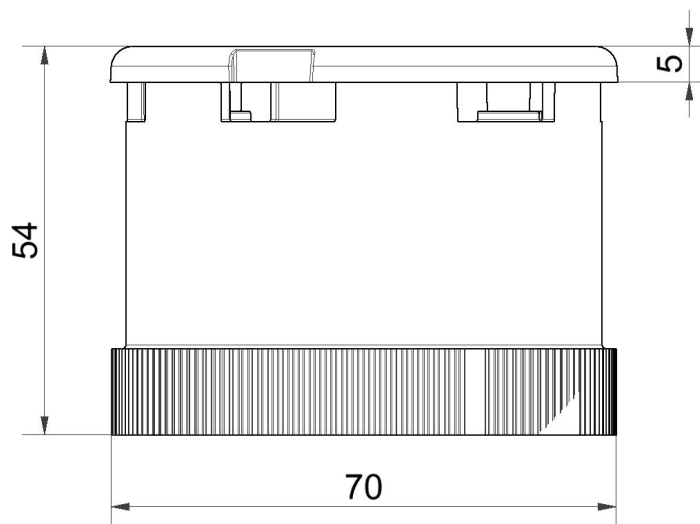

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.