

Modular Signal Towers / KombiSIGN 72
Element IO-Link KS71/72 24VDC CL



Part No.:	646.440.55
Series:	KombiSIGN 71

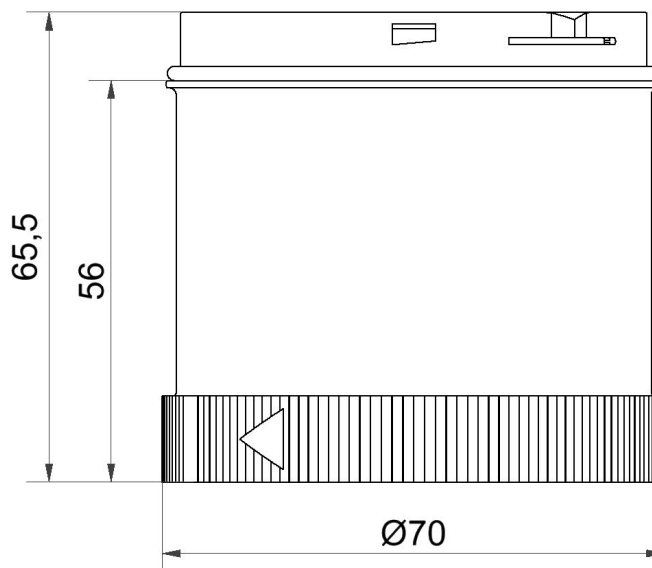


MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Clear
Protection category	IP65
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	80 g
Product weight	60 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	6 mA
Protection class	Protection class 2
Pollution degree	3

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

Element IO-Link KS71/72 24VDC CL**DRAWING**

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.