

Xmore® SSD 2,5" SATA III


Product description



Xmore® Partnumber	SSD060GXACTT-003Z	
	SSD120GXACTT-003Z	
	SSD240GXACTT-003Z	
	SSD480GXACTT-003Z	
	SSD960GXACTT-003Z	
Flash Type	3D TLC	
Capacity	60GB / 120GB / 480GB / 960GB	
SATA Interface Power Consumption	SATA Revision 3.0	
	SATA 1.5Gbps, 3Gbps, and 6Gbps	
	Active mode:	> 3000mW
	Idle mode:	> 210mW
	DEVSLP mode	< 5mW
Performance Sequential *960GB	Read:	Up to 560 MB/s
	Write:	Up to 530 MB/s
Advance Flash Management	Static and Dynamic wear-leveling	
	Bad Block management	
	SMART Function	
	TRIM	
	Over provision	
TBW (Terabytes Written)	4388 TBW for 960GB	
Temperature Range	Storage:	-40°C to 85°C
	Operation:	0°C to 70°C
RoHS compliant		



Technical draw

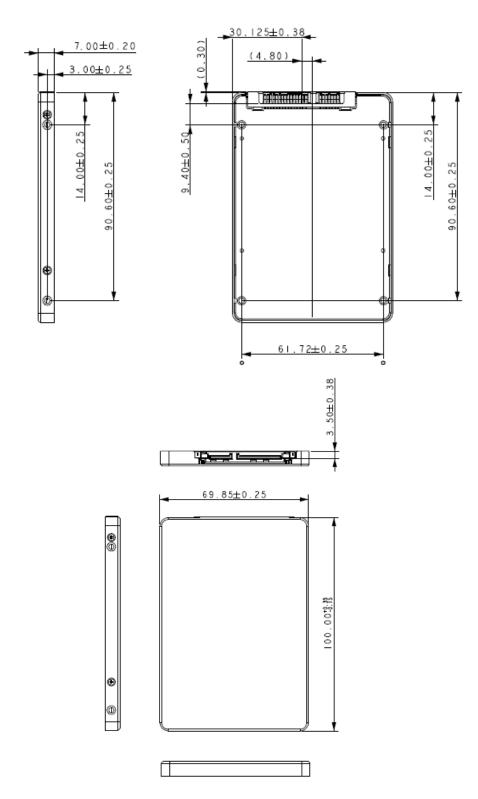

Note: Xmore® reserves the right to change non BoM parts without notice.