


# RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△*2	B	ECR #100617-2 EDIT PACKING,LABEL	06/17/10'

APPROVED *[Signature]* 6/17

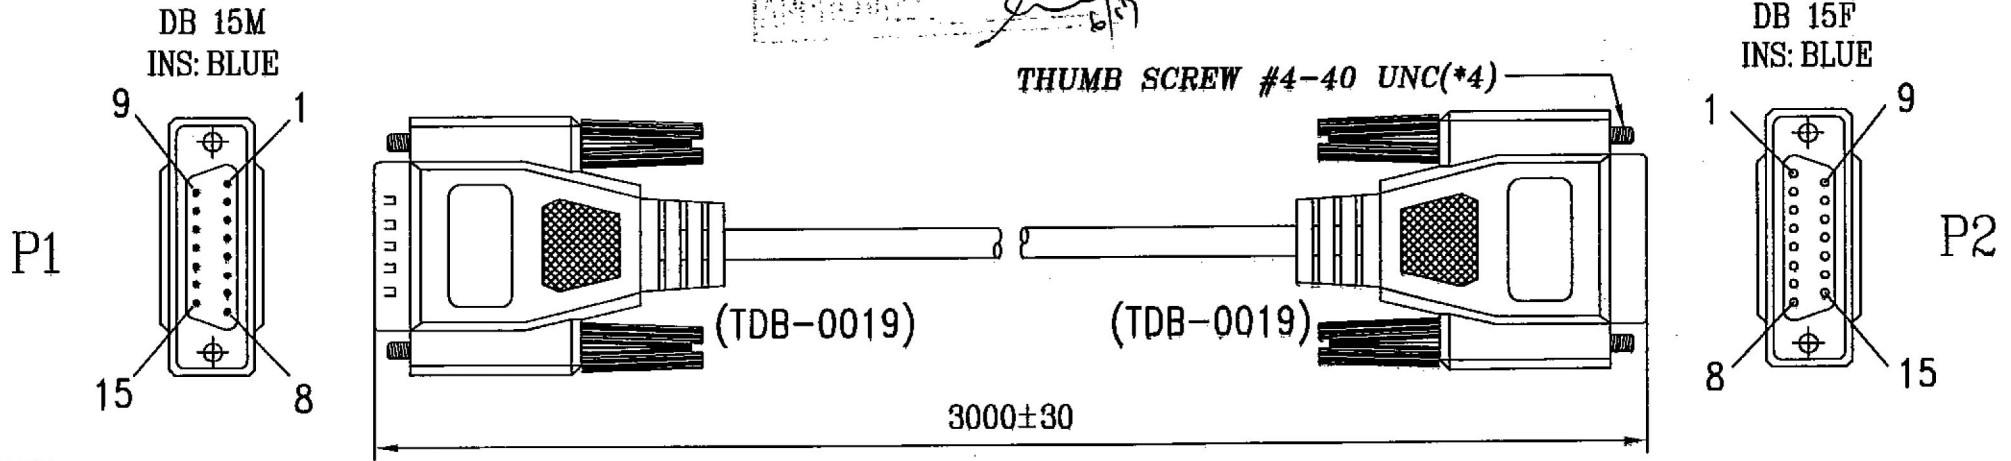

**NOTE:**

1.CABLE: NON-UL 28AWG(7/0.127 T.C)\*15C+DRAIN WIRE+AL/MY  
PVC JACKET: OD:  $\phi 6.0 \pm 0.2$ mm COLOR: BLACK(NK-K01)

**2.CONNECTOR:**

P1:DB15P MALE GOLD FLASH CONTACT , NICKEL PLATED SHELL .  
P2:DB15P FEMALE GOLD FLASH CONTACT , NICKEL PLATED SHELL .

3.HOOD:MOLDED TYPE PVC 45P COLOR:BLACK(NK-K01)

**4.ELECTRICAL TEST:**

100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE  $3\Omega$  MAX .  
INSULATION RESISTANCE  $5M\Omega$  MIN .

5.PACKING: EACH PC / ZIP BAG(MX ZIP BAG:L)+BAR CODE LABEL.

△ BAR CODE: 7612320134346.

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	SHELL
																DRAIN
P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	SHELL

△  
BAR CODE LABEL: BLACK LETTER ON WHITE LABEL



Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

**Maxxtro®**

Title		DB15/M - DB15/F CABLE	
Customer P/N:		100209	
Draw	FANNIE 06/17/10'	Customer	T-JPC
Chk	<i>[Signature]</i>	Scale	NONE
Engr	<i>[Signature]</i>	Units	m/m
Dwg No.		120-3174	REV: B
Sheet		1/1	