


Europa Series Terminal Blocks



230

Connection: conductor size 0.5 - 2.5 mm² (with wire protector)
 conductor size 0.5 - 4.0 mm² (without wire protector)
Fixing: by screw or rivet size Ø 2.8 mm
Torque screw: M3: ⤴ max. 0.5 Nm
Stripping length: 5 - 5.5 mm
Important approvals: VDE, UL
Accessories: marking labels (page 82), strain reliefs (page 81)
Upon request: 7 - 11 pole, printing, different polyamides (in particular glow wire according to EN 60335-1 and PA 6.6 HT for high temperatures), different screws

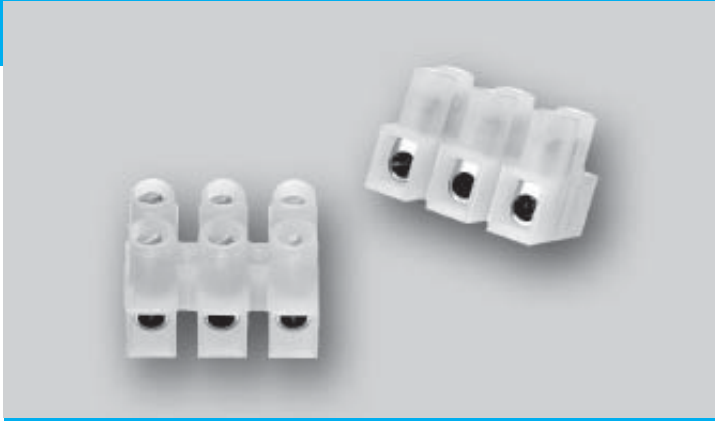

230 K with Raised Base

Connection: conductor size 0.5 - 2.5 mm² (with wire protector)
 conductor size 0.5 - 4.0 mm² (without wire protector)
Fixing: by screw or rivet size Ø 2.8 mm
Torque screw: M3: ⤴ max. 0.5 Nm
Stripping length: 5 - 5.5 mm
Important approvals: VDE, UL
Accessories: marking labels (page 82), strain reliefs (page 81)
Upon request: 7 - 11 pole, printing, different polyamides (in particular glow wire to EN 60335-1), different screws

Description	Item	Order Number	PU	Description	Item	Order Number	PU
with Wire Protectors				with Wire Protectors			
1 pole	230/ 1 DS	121301	1000	1 pole	230 K/ 1 DS	121701	1000
2 pole	230/ 2 DS	121302	3000	2 pole	230 K/ 2 DS	121702	2000
3 pole	230/ 3 DS	121303	2000	3 pole	230 K/ 3 DS	121703	1500
4 pole	230/ 4 DS	121304	500	4 pole	230 K/ 4 DS	121704	500
5 pole	230/ 5 DS	121305	500	5 pole	230 K/ 5 DS	121705	500
6 pole	230/ 6 DS	121306	500	6 pole	230 K/ 6 DS	121706	500
12 pole	230/12 DS	121312	50	12 pole	230 K/12 DS	121712	40
without Wire Protectors				without Wire Protectors			
1 pole	230/ 1	121201	1000	1 pole	230 K/ 1	121601	1000
2 pole	230/ 2	121202	3000	2 pole	230 K/ 2	121602	2000
3 pole	230/ 3	121203	2000	3 pole	230 K/ 3	121603	1500
4 pole	230/ 4	121204	500	4 pole	230 K/ 4	121604	500
5 pole	230/ 5	121205	500	5 pole	230 K/ 5	121605	500
6 pole	230/ 6	121206	500	6 pole	230 K/ 6	121606	500
12 pole	230/12	121212	50	12 pole	230 K/12	121612	40

