



DIAGRAM CIRCUIT

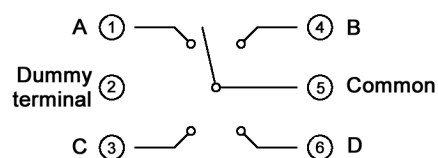

P.C.B. LAYOUT

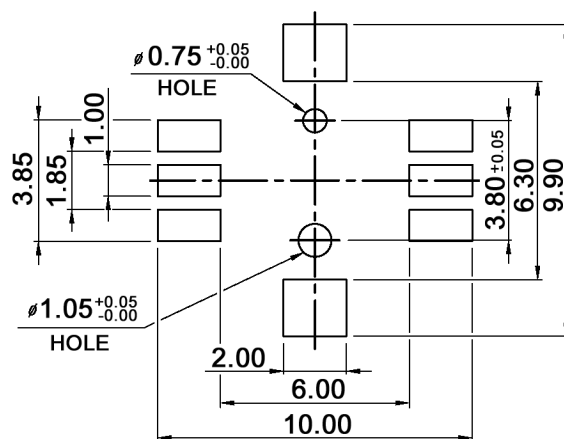

Specifications:

- Contact rating: 50mA, 12V DC
- Contact resistance: 100mOhm max.
- Insulation resistance: 100MOhm min.
- Dielectric strength: 250V AC (50 or 60 Hz) for 1 minute
- Operating temperature: -20°C to +70°C
- Storage temperature: -40°C to +85°C
- Operating force: 4 directions: 160 +/-50g
- Mechanical life: 100 000 cycles min.
- Soldering temperature: peak 255°C / max. 10sec., >250°C
- Material: Cover: C7701RH
Stem: high-temp. thermoplastic LCP
Contact: SUS301CSP-EH
Termianl: C5210R-H, with silver plated
Base: high-temp. thermoplastic LCP, black

Maßstab		Datum	Name	<h1>TSSJ 4</h1>
Oberfläche		09/05	dr	
knitter-switch				<h2>30 06 98</h2>
Zust	Änderung	Datum	Name	Blatt 1/1