




Anwendung/Application :




Operating System (OS):

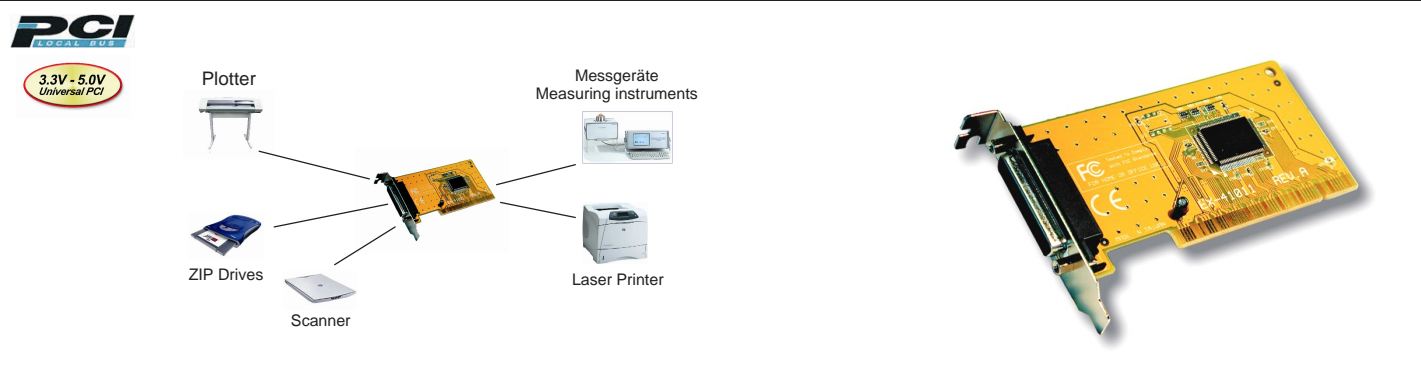

Geprüft/Approved:



Verpackung/Packing:




LowProfile 1P Parallel SPP/EPP/ECP PCI 32-Bit Karte

Beschreibung :	<ul style="list-style-type: none"> Die EX-41211 LowProfile PCI Parallel Karte stellt einen Parallel SPP/EPP/ECP High Performance Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Parallele Ausgang für PC's, kleine Workstations oder Server über den PCI Bus zu erweitern. Die EX-41211 kann in schmale Gehäuse bis zu einer maximaler Bauhöhe von 8cm eingesetzt werden.
Merkmale :	<ul style="list-style-type: none"> Universal PCI 32-Bit Parallel Karte mit einem Anschluss Schnittstelle: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) I/O Adressen: wird vom Betriebs System vergeben Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing Keine Jumper Einstellung erforderlich (nicht möglich) Unterstützt Motherboard mit 5V und 3.3V
Chip-Set :	<ul style="list-style-type: none"> Oxford OX12PCI840
Datentransfer-Rate :	<ul style="list-style-type: none"> 2Mbyte/Sek.
Anschlüsse :	<ul style="list-style-type: none"> 1 x 25 Pin D-SUB Parallel Buchse
Hardwaresysteme :	<ul style="list-style-type: none"> PCI 32-Bit und PCI-X 64-Bit Bus
Betriebstemperatur :	<ul style="list-style-type: none"> 0 bis 55°C (32 bis 131°F)
Luftfeuchtigkeit :	<ul style="list-style-type: none"> 5 bis 95%
Abmessung / Gewicht :	<ul style="list-style-type: none"> 120 x 63 mm / 100g
Lieferumfang :	<ul style="list-style-type: none"> EX-41211 Treiber CD Handbuch



LowProfile 1P Parallel SPP/EPP/ECP PCI 32-Bit card

Description :	<ul style="list-style-type: none"> The EX-41211 LowProfile PCI parallel adapter provides one SPP/EPP/ECP high performance ports. It is designed for PC's, thin clients or server to provide instant LPT port expansion via the PCI- or PCI-X Bus. The card is fully Universal PCI Plug-and-Play compatible and no IRQ and I/O address conflict problems. The EX-41211 can use for a small computer chassis of maximum 8cm high.
Feature :	<ul style="list-style-type: none"> Universal PCI 32-Bit Parallel card with one port Interface: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) I/O addresses: Setting from the operating system Interrupt: Setting from the System BIOS with Interrupt Sharing No Jumper setting Support Motherboard with 5V and 3.3V
Chip-Set :	<ul style="list-style-type: none"> Oxford OX12PCI840
Data transfer rate :	<ul style="list-style-type: none"> 2Mbyte/Sec.
Connectors :	<ul style="list-style-type: none"> 1 x 25 pin D-SUB parallel female connector
Hardware system :	<ul style="list-style-type: none"> PCI 32-Bit and PCI-X 64-Bit Bus
Operating Temperature :	<ul style="list-style-type: none"> 0 to 55°C (32 to 131°F)
Humidity :	<ul style="list-style-type: none"> 5 to 95%
Size / Weight :	<ul style="list-style-type: none"> 120 x 63 mm / 100g
Packaging contents :	<ul style="list-style-type: none"> EX-41211 Driver CD Manual