

Incoming terminal PKZM0

Part no.
Article no.

BK25/3-PKZ0
032720



Powering Business Worldwide™

Program

Product range			Accessories
Accessories			Incoming terminal
For use with			PKZM0 PKE
Notes			
For three-phase commoning link, protected against accidental contact, $U_e = 690\text{ V}$, $I_u = 63\text{ A}$			
For conductor cross-sections:			
2.5 - 25 mm ² stranded			
2.5 - 16 mm ² flexible with ferrules			
AWG 14 - 6, for use on terminals 1, 3, 5			



Approbationen

UL approval	Yes
CSA approval	Yes
Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	12528
CSA Class No.	3211-05
NA Certification	UL listed, CSA certified
Specially designed for NA	No

Technical data according to ETIM 4.0

Suitable for			-
Max. conductor cross-section		mm ²	25
Width of terminal		mm	45
Busbar width		mm	0
Busbar thickness		mm	0
Suitable for flat cable connection			No
Suitable for round cable connection			YES
Suitable for sector cable connection			No
Max. rated operational current I_e		A	63

Dimensions

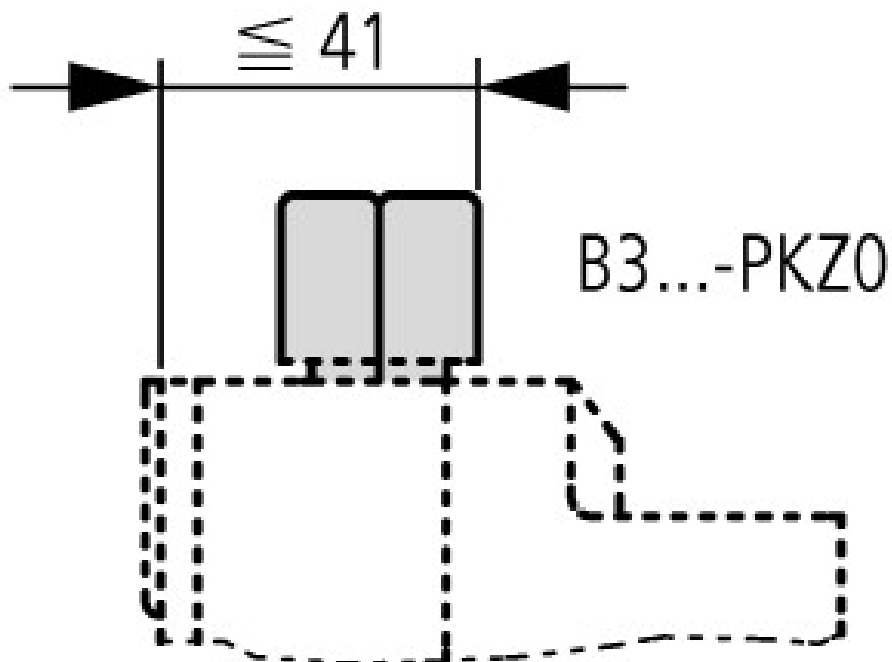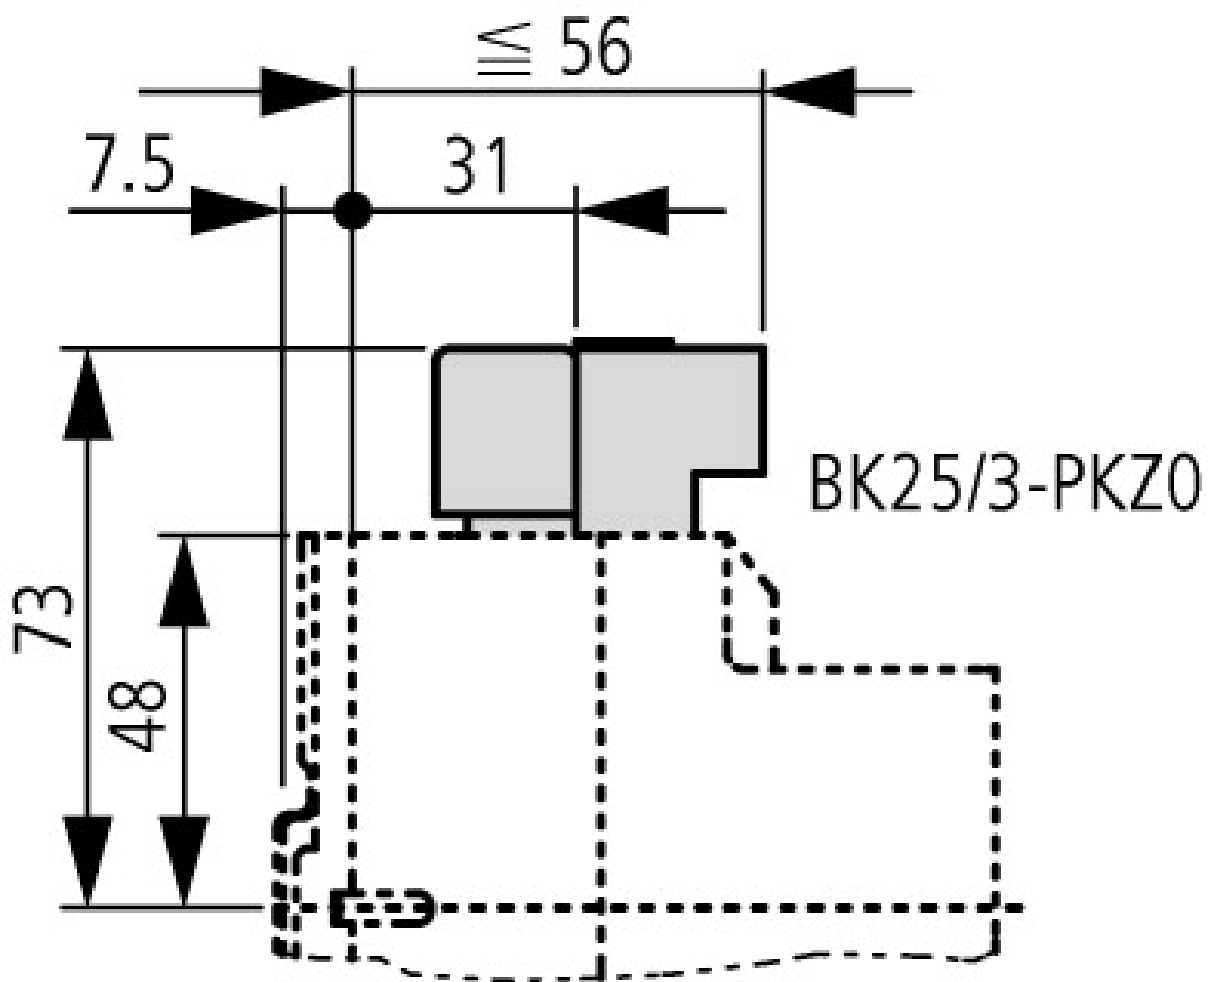

Additional product information (links)

AWA1210-2295 (IL03402013Z) Three-phase commoning link	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/22950506.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf