







Product Sheet

Part Number: CTF 40 L

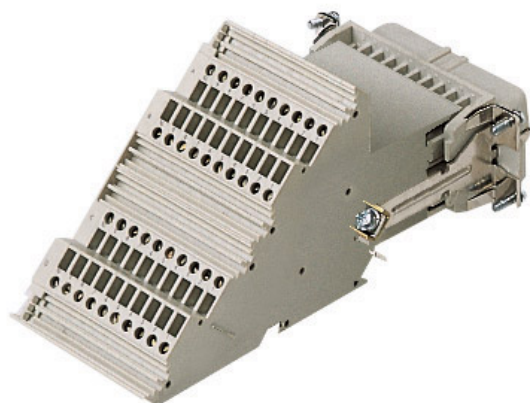

| | |
|--------------------------------|---|
| Family | CLASS insert series |
| Version | with terminal block, screw terminal connection |
| Series | CT |
| Product type | with female contacts |
| Type | left side mounting |
| Model | female insert |
| Reference standard | EN 61984 (2001-11) |
| Contact type | silver plated |
| No. of poles | 40 poles +  |
| Voltage (V) | 250V |
| Current (A) | 10A (A.C./D.C.) |
| Wire section | 0,75mm ² - 2,5mm ² |
| Awg size | 18 - 14 |
| Quality mark |  600V   GOST  |
| IP degree of protection | degree of protection IP20 without enclosure, IP65, IP66, IP67 (EN 60529) and IP69K (DIN 40050 - 9) with enclosure |


The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.

Fixing centre distance size "57.27" only bulkhead mounted housing

Impulse withstand voltage 4kV

Pollution degree 3

Notes CT ... : for non-prepared conductors

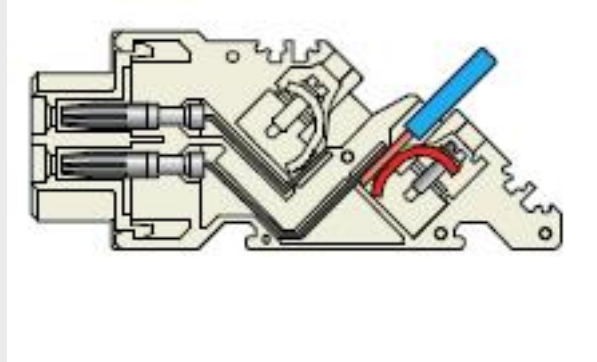

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.