







Product Sheet

Part Number: CTM 64 L

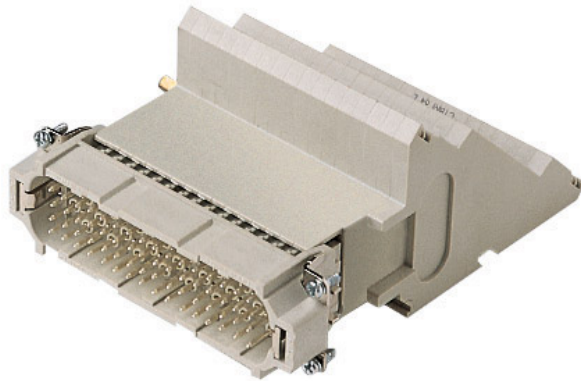


Family	CLASS insert series
Version	with terminal block, screw terminal connection
Series	CT
Product type	with male contacts
Type	left side mounting
Model	male insert
Reference standard	EN 61984 (2001-11)
Contact type	silver plated
No. of poles	64 poles + 
Voltage (V)	250V
Current (A)	10A (A.C./D.C.)
Wire section	0,75mm ² - 2,5mm ²
Awg size	18 - 14
Quality mark	   

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.

IP degree of protection	degree of protection IP20 without enclosure, IP65, IP66, IP67 (EN 60529) and IP69K (DIN 40050 - 9) with enclosure
Fixing centre distance	size "104.27" only bulkhead mounted housing
Impulse withstand voltage	4kV

Pollution degree 3

Notes CT ... : for non-prepared conductors

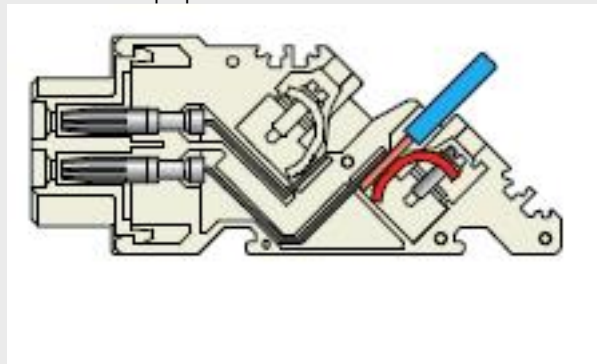

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.