







## Product Sheet

**Part Number:** CTSM 40 L

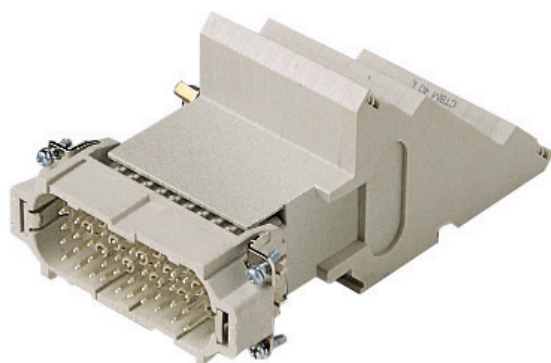

<b>Family</b>	CLASS insert series
<b>Version</b>	with terminal block, spring terminal connection
<b>Series</b>	CTS
<b>Product type</b>	with male contacts
<b>Type</b>	left side mounting
<b>Model</b>	male insert
<b>Reference standard</b>	EN 61984 (2001-11)
<b>Contact type</b>	silver plated
<b>No. of poles</b>	40 poles + 
<b>Voltage (V)</b>	250V
<b>Current (A)</b>	10A (A.C./D.C.)
<b>Wire section</b>	0,14mm <sup>2</sup> - 2,5mm <sup>2</sup>
<b>Awg size</b>	26 - 14
<b>Quality mark</b>	 600V   GOST 
<b>IP degree of protection</b>	degree of protection IP20 without enclosure, IP65, IP66, IP67 (EN 60529) and IP69K (DIN 40050 - 9) with enclosure

The information and the dimensions contained are not binding and may be changed without prior notice.  
The drawing's dimensions are in mm.


**Fixing centre distance** size "57.27" only bulkhead mounted housing

**Impulse withstand voltage** 4kV

**Pollution degree** 3

**Notes**

Spring terminal connection.  
- CTSE spring inserts for section conductors:  
0.14 - 2.5 mm<sup>2</sup> - AWG 26 - 14  
- conductors stripping length: 9...11 mm

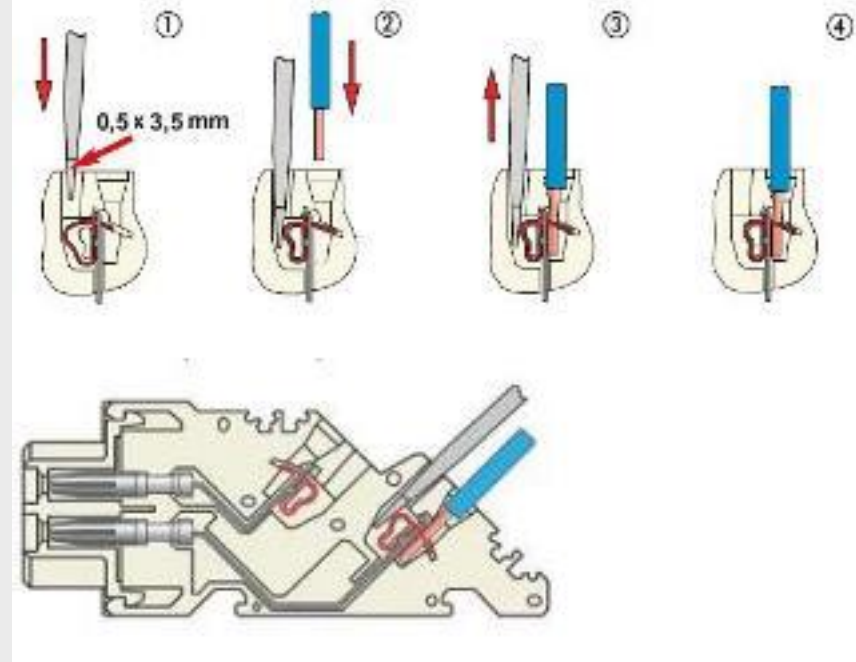

The information and the dimensions contained are not binding and may be changed without prior notice.  
The drawing's dimensions are in mm.