






Product Sheet

Part Number: CXM 12/2

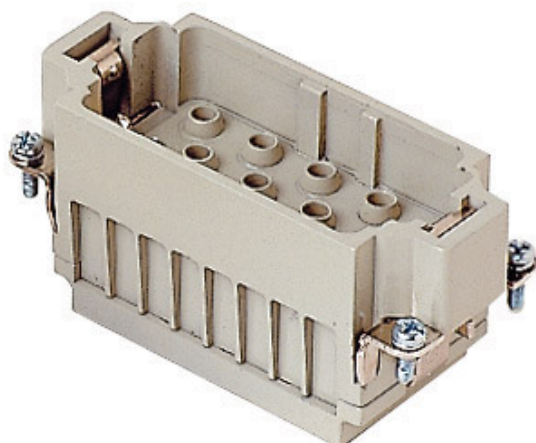

Family	CLASS insert series
Version	crimp connections
Series	CX
Product type	for male contacts 40A and 10A
Model	male insert
Reference standard	EN 61984 (2001-11)
No. of poles	12 poles + 
Auxiliaries poles	2 poles (10A max - 250V/4kV/3)
Voltage (V)	690V
Current (A)	40A (A.C./D.C.)
Quality mark	 600V  GOST 
IP degree of protection	IP20 degree of protection without enclosure; IP65, IP66, IP67, IP68 (EN 60529) and IP69K (DIN 40050 - 9) with enclosure
Fixing centre distance	size "77.27"

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.

Impulse withstand voltage 8kV

Pollution degree 3

Notes CX 12/2 inserts:

- characteristics according to EN 61984:
(40A 690V 8kV 3 600V)
- 2 Auxiliary contacts: (10A 250V 4kV 3)

The information and the dimensions contained are not binding and may be changed without prior notice.
The drawing's dimensions are in mm.