

DIN 41612 / IEC 60603-2 Connectors

Electrical and Mechanical Characteristics



	Standard	B, B/2, B/3, C, C/2, C/3, Q, Q/2, Q/3, R, R/2, R/3, CD, RD, TE, E80, E160, ECC	M
Number of Pins		20, 30, 32, 48, 64, 80, 96, 128, 160	6, 24, 42, 60, 78
Technical data			
Climate Category	DIN EN 60068-1 test b	55/125/56	55/125/56
Temperature range		-55/125 °C	-55/125 °C
Current rating	IEC60512 test 5b	Ambient temperature 20 °C 2.0 A 70 °C 1.6 A 100 °C 1.0 A	Ambient temperature 20 °C 2.0 A 70 °C 1.6 A 100 °C 1.0 A
Clearance and creepage distance		contact - contact 1.2 mm contact - ground 1.8 mm contact - ground 1.6 mm (clearance)	contact - contact 1.2 mm contact - ground 3.0 mm contact - ground 2.5 mm (clearance)
CTI value	IEC 60112	225 (Standard and THR) 250 (Inverted Versions)	225
Voltage rating	IEC 60664	Has to be determined according to customer application (degree of environmental pollution) according to IEC 60664	Has to be determined according to customer application (degree of environmental pollution) according to IEC 60664
Dielectric strength	IEC 60512	contact - contact 1000 V _{rms} contact - ground 1550 V _{rms}	contact - contact 1000 V _{rms} contact - ground 1550 V _{rms}
Contact resistance	IEC 60512 test 2a	< 20 mΩ	< 20 mΩ
Insulation resistance	IEC 60512 test 3a	> 10 ⁴ MΩ	> 10 ⁴ MΩ
Vibration sine	IEC 60512 test 6d	10 – 2000 Hz 20 g	10 – 2000 Hz 20 g
Contact interruption (while vibration test)	IEC 60512 test 2e	< 1 μs	< 1 μs
Shock halvesine	IEC 60512 test 6c	50 g 11 ms	50 g 11 ms
Contact interruption (while shock test)	IEC 60512 test 2e	< 1 μs	< 1 μs
Mechanical operation (mating cycles)	IEC 60512 test 9a	Class 1: 500 mating cycles Class 2: 400 mating cycles	Class 1: 500 mating cycles Class 2: 400 mating cycles
Insertion and withdrawal force	IEC 60512 test 13b	20 cont.: 18 N max. 30 cont.: 28 N max. 32 cont.: 30 N max. 48 cont.: 45 N max. 64 cont.: 60 N max. 96 cont.: 90 N max. 128 cont.: 100 N max. 160 cont.: 110 N max.	6 cont.: 5 N max. 24 cont.: 22 N max. 42 cont.: 40 N max. 60 cont.: 57 N max. 78 cont.: 74 N max. With special contacts max. 100 N
Gauge retention force per contact	IEC 60512 test 16e	> 0.15 N	> 0.15 N

DIN 41612 / IEC 60603-2 Connectors


Electrical and Mechanical Characteristics




	Standard	B, B/2, B/3, C, C/2, C/3, Q, Q/2, Q/3, R, R/2, R/3, CD, RD, TE, E80, E160, ECC	M
Number of Pins		20, 30, 32, 48, 64, 80, 96, 128, 160	6, 24, 42, 60, 78
Process-conditions			
Solder temperature max.	IEC 68-2-20		
Hand soldering temperature max.		3.5 s at 350 °C	3.5 s at 350 °C
Dip soldering temperature max.		10 s at 260 °C	10 s at 260 °C
Reflow soldering temperature max.		10 s at 260 °C (THR versions)	
Warning		Soldering of pressfit connectors not recommended.	Soldering of pressfit connectors not recommended.
Materials			
Housing: Plastic material (symbol)		PBT GF PA 46 GF (THR)	PBT GF
CTI value	IEC 60112	225 (Standard and THR) 250 (Inverted Versions)	225
UL flame rating		UL 94 V-0	UL 94 V-0
UL file		E47960 (Standard and THR) E41938 (Inverted Versions)	E47960
Contact and mating area			
Base material		Cu alloy	Cu alloy
Plating		Gold plated	Gold plated
Termination area			
Base material		Cu alloy	Cu alloy
Solder, pressfit and THR		Sn	Sn
Environment compatibility			
Recycling		no flame-retardent additives, no toxic additives, allows easy recycling	
Product-approval and customer specific tests			
UL		E84703	E84703
CSA		LR62504	LR62504

DIN 41612 / IEC 60603-2 Connectors

Type R Male

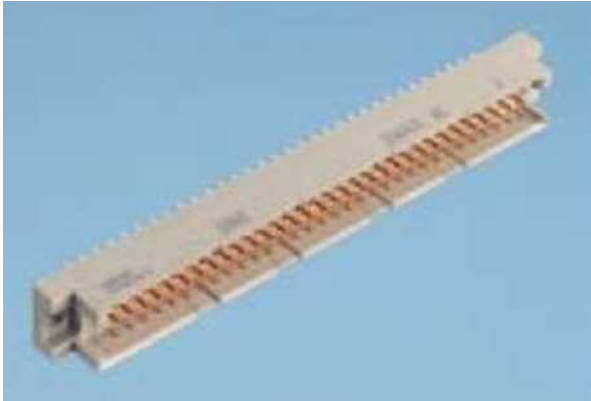

Dimensional Drawing Pressfit

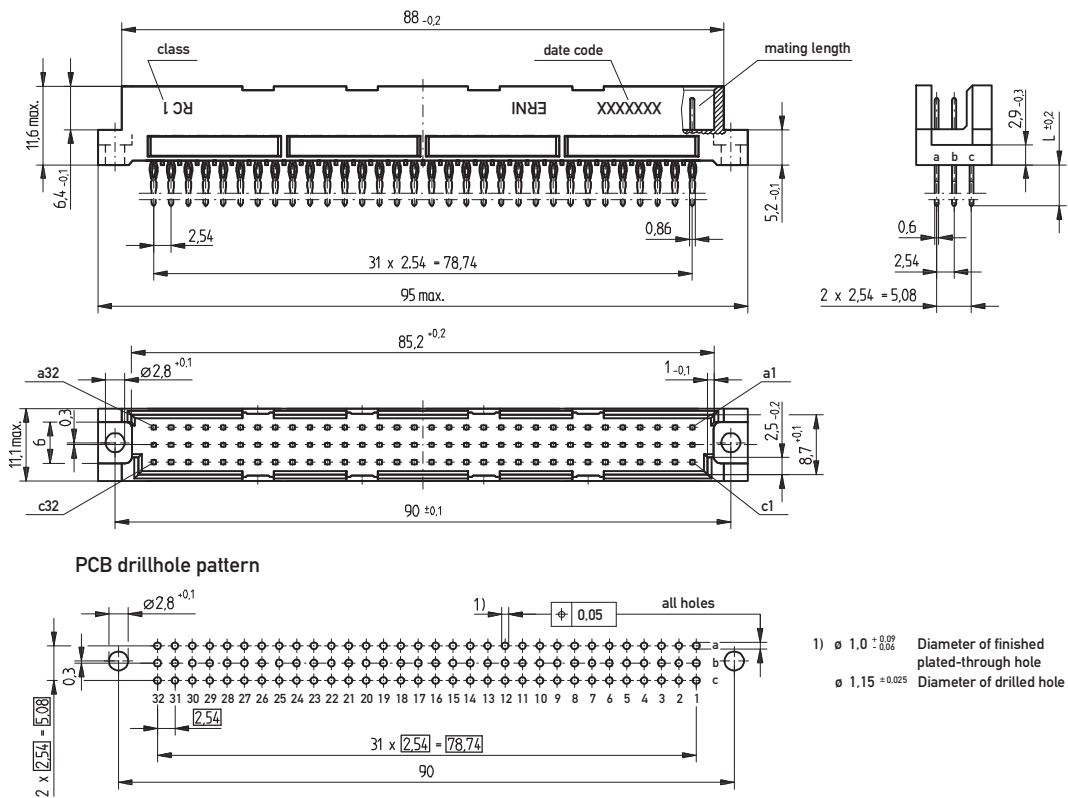


DIN 41612 / IEC 60603-2 Connectors


Type R Male



Dimensional Drawing Solder

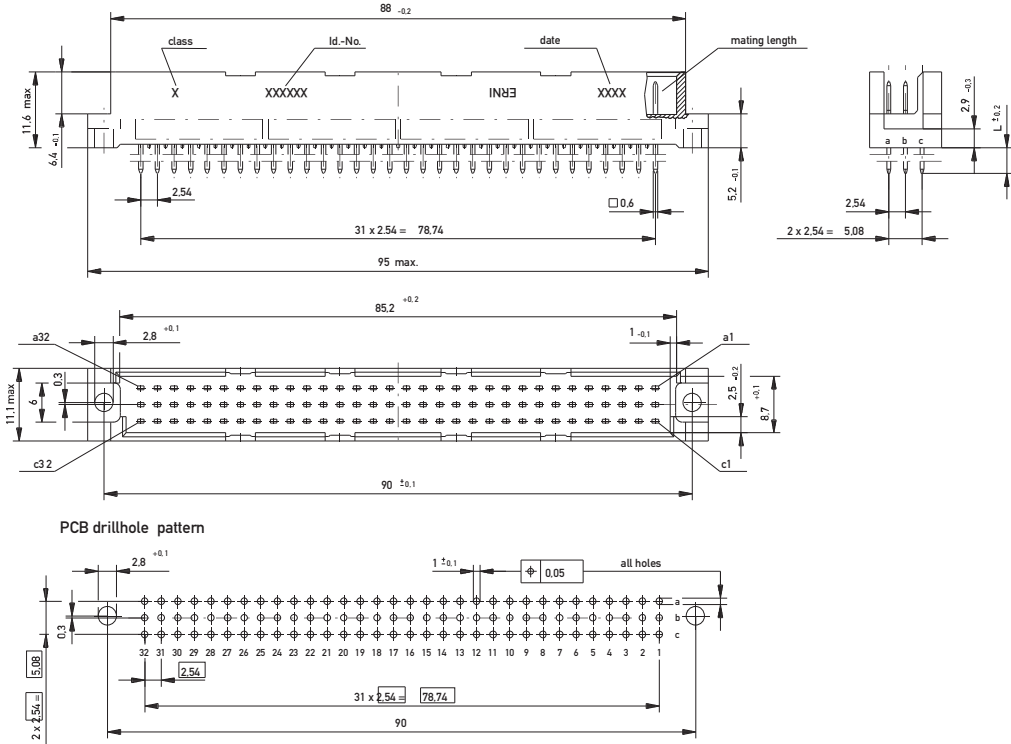

Dimensional Drawing THR

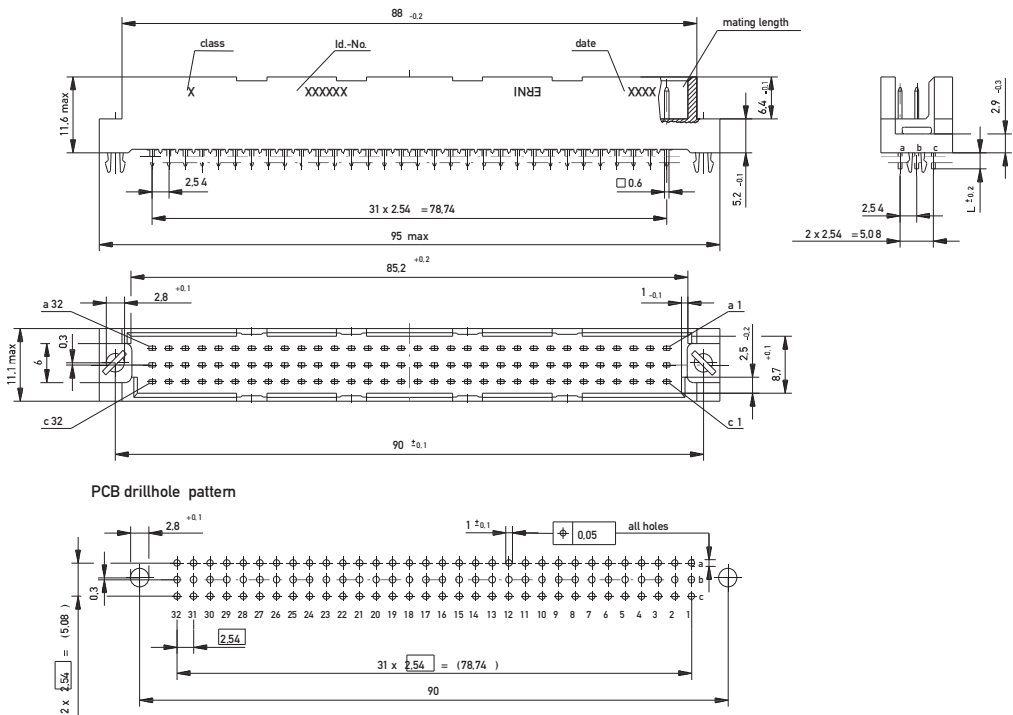

DIN 41612 / IEC 60603-2 Connectors

Type R Male



Ordering Information

No. of Pins	Termination	Term. Length	Pin Dimensions	Class	Pressfit Zone	Part Number
64	Pressfit	6 mm	0.6 x 0.6 mm	1	-	354385
64	Pressfit	6 mm	0.86 x 0.6 mm	2	-	234713
64	Pressfit w. Transfer Zone	13 mm	0.6 x 0.6 mm	2	-	354381
64	Pressfit	20 mm	0.6 x 0.6 mm	2	-	354395
64	Pressfit w. Transfer Zone	20 mm	0.6 x 0.6 mm	2	-	354400
96	Pressfit	6 mm	0.86 x 0.6 mm	1	-	354418
96	Pressfit	6 mm	0.86 x 0.6 mm	2	-	234712
96	Pressfit w. Transfer Zone	13 mm	0.6 x 0.6 mm	2	-	284420
96	Pressfit	20 mm	0.86 x 0.6 mm	1	-	354396
96	Pressfit	20 mm	0.86 x 0.6 mm	2	-	354399
96	Pressfit w. Transfer Zone	20 mm	0.6 x 0.6 mm	1	2.5 mm	414702
96	Pressfit w. Transfer Zone	20 mm	0.86 x 0.6 mm	2	-	254141

DIN 41612 / IEC 60603-2 Connectors

Type R Male



Ordering Information





No. of Pins	Termination	Term. Length	Pin Dimensions	Class	Pressfit Zone	Part Number
32	Solder	4 mm	0.6 x 0.6 mm	1	-	304225
32	Solder	4 mm	0.6 x 0.6 mm	2	-	304425
32	Solder	13 mm	0.6 x 0.6 mm	1	-	304221
32	Solder	13 mm	0.6 x 0.6 mm	2	-	304421
64	Solder	4 mm	0.6 x 0.6 mm	1	-	334214
64	Solder	4 mm	0.6 x 0.6 mm	2	-	334414
64	Solder	13 mm	0.6 x 0.6 mm	1	-	334210
64	Solder	13 mm	0.6 x 0.6 mm	2	-	334410
96	Solder	4 mm	0.6 x 0.6 mm	1	-	334215
96	Solder	4 mm	0.6 x 0.6 mm	2	-	334415
96	Solder	13 mm	0.6 x 0.6 mm	1	-	334211
96	Solder	13 mm	0.6 x 0.6 mm	2	-	334411

DIN 41612 / IEC 60603-2 Connectors

Type R Male



Ordering Information

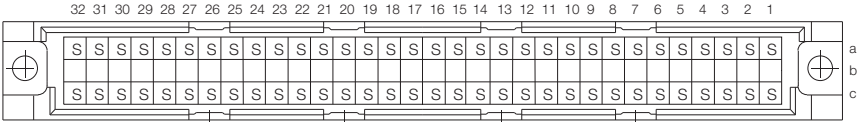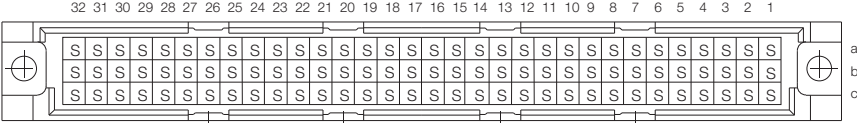No. of Pins	Termination	Term. Length	Pin Dimensions	Class	Pressfit Zone	Part Number
						
64	THR	2.5 mm	0.6 x 0.6 mm	2	-	194576
64	THR with Clip	2.5 mm	0.6 x 0.6 mm	2	-	194578
						
96	THR	2.5 mm	0.6 x 0.6 mm	2	-	164306
96	THR with Clip	2.5 mm	0.6 x 0.6 mm	2	-	154961