
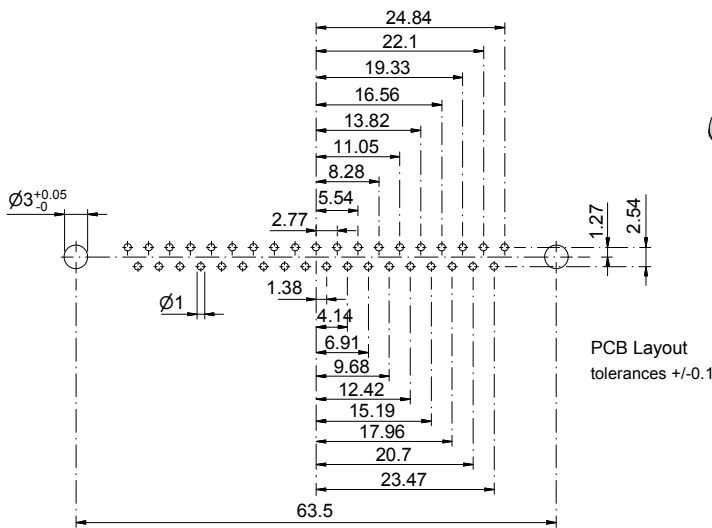
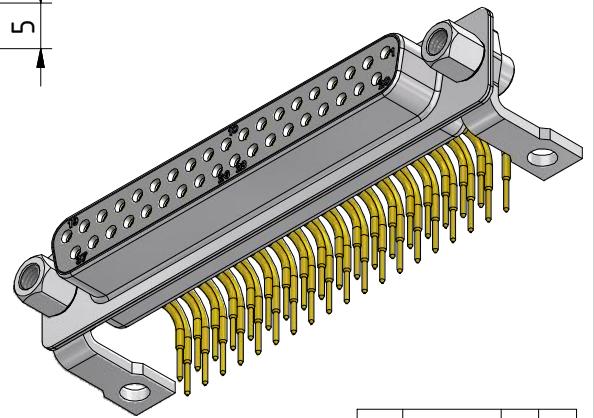
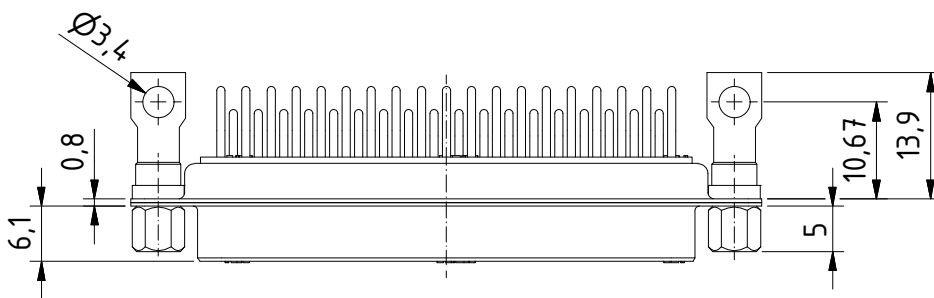
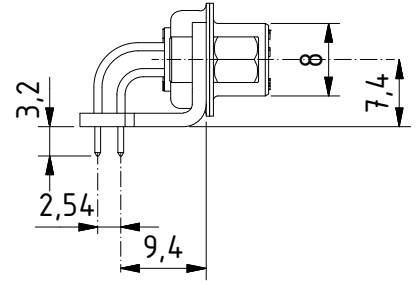


RoHS compliant

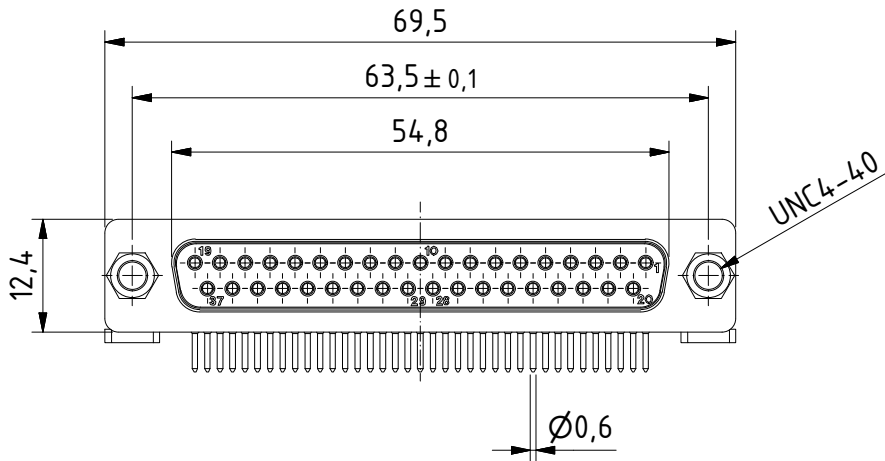

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARACTERISTICS

- Working voltage: 125V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)			
size in mm			
> 0.5	> 3	> 6	> 30
up to 3	up to 6	up to 30	up to 120
Tolerances			
±0.1	±0.2	±0.2	±0.3

modification	Rev.	Rev.	Rev.	DE013601 part no.		
	Rev.	Rev.	Rev.			
DTS37SYC/2M46UNB5	1.2:1 scale			drawn	17.06.2013	mr
				checked		
				approved		
 Industrie Neuhofer 8c CH-3422 Kirchberg				K060764 drawing no.		