




### Anwendung / Application



## ExpressCard Adapter für alle Expansion Gehäuse

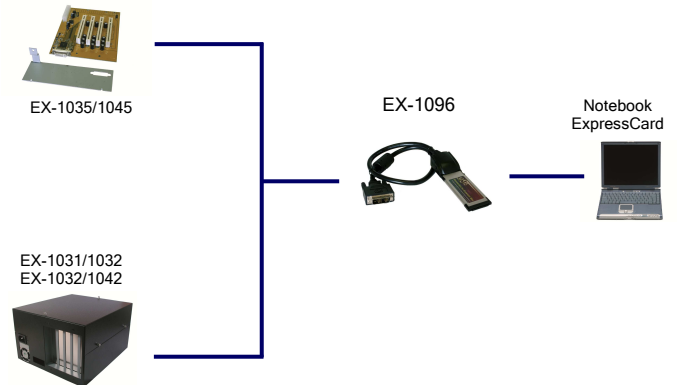

## ExpressCard adapter for all Expansion boxes

### Beschreibung

Die EX-1096 ist ein Notebook ExpressCard Adapter für die Erweiterungs-Boxen EX-1031 und EX-1032 (Gehäuse mit 4 x PCI-Slots), EX-1035 (Expansion Board mit 4 x PCI-Slots ohne Gehäuse), EX-1041 und EX-1042 (Gehäuse mit je 2 x PCI und PCI-Express-Slots) und EX-1045 (Expansion Board mit je 2 x PCI und PCI-Express-Slots ohne Gehäuse).

**Achtung! Die EX-1096 ist nur Optional zu den oben genannten EXSYS Produkten erhältlich und muss getrennt bestellt werden.**

### Description

The EX-1096 it's a Notebook ExpressCard adapter for the Expansion Boxes EX-1031 and EX-1032 (Case with 4 x PCI-Slot), EX-1035 (Expansion Board 4 x PCI-Slots without case), EX-1041 and EX-1042 (Case with each 2 x PCI and PCI-Express-Slot) and EX-1045 (Expansion Board with each 2 x PCI and PCI-Express-Slot without case).

**Regard! The EX-1096 is only an option to the above EXSYS products available and must be ordered separately.**

### Merkmale

- ExpressCard-Slot Adapter
- ExpressCard Base konform, Spezifikation: Revision 1.0a
- ExpressCard Advanced Error Reporting, Unterstützt Capability Including ECRC
- Unterstützt Extended Virtual Channel (VC), Unterstützt Active State Link Power Management
- Unterstützt Wake Event und Beacon

### Features

- ExpressCard-Slot adapter
- ExpressCard Base, Specifications: Revision 1.0a
- ExpressCard Advanced Error Reporting, Capability Including ECRC Support
- Extended Virtual Channel (VC) Support, Includes a Second VC for Quality-of-Service and
- Active State Link Power Management Support, Wake Event and Beacon Support

### Spezifikationen

- **Chip-Set:** —
- **Datentransfer-Rate:** Bis 250Mbytes/Sek., voller x1 PCI-Express Durchsatz
- **Anschlüsse:** 1 x DVI-ähnlicher Anschluss zur Expansion Box
- **Hardwaresysteme:** ExpressCard Slot 34mm
- **Treiber:** Vom OS zur Verfügung gestellt! (Standard PCIe Brücke)
- **Betriebstemperatur :** 0<sup>0</sup> bis 55<sup>0</sup> Celsius
- **Lagertemperatur:** -40<sup>0</sup> bis 75<sup>0</sup> Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 115 x 40 mm
- **Gewicht:** 400g
- **Lieferumfang:** EX-1096, DVI-Kabel, ExpressCard Kit (EX-10000), Handbuch

### Specifications

- **Chip-Set:** —
- **Data transfer rate:** Up to 250Mbytes/Sec., Full x1 PCI-Express throughput
- **Connectors:** 1 x DVI-like connector to the Expansion Box
- **Hardware system:** ExpressCard Slot 34mm
- **Driver:** Provided by operating system (standard PCIe bridge)
- **Operating Temperature :** 32<sup>0</sup> up to 131<sup>0</sup> Fahrenheit
- **Storage Temperature:** -40<sup>0</sup> up to 167<sup>0</sup> Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 115 x 40 mm
- **Weight:** 400g
- **Packaging contents:** EX-1096, DVI-cable, ExpressCard Kit (EX-10000), Manual

### System / OS

### Geprüft / Approved

### Verpackung / Packaging

