


KEMET Part Number: SMR27.5226H50F13L4TRAY
(F211FM226R050C)

Film, Metallized PPS, Commercial Grade, SMR/F211, 22 uF, 2.5%, 50 V, 125C, Lead Spacing = 27.5mm

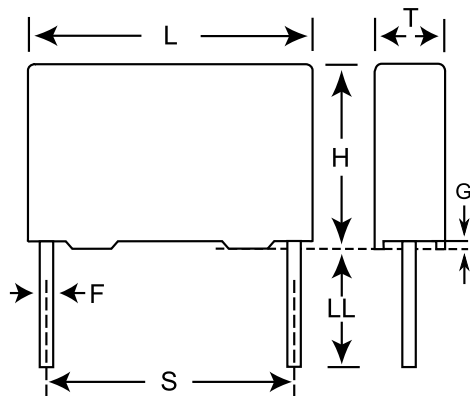

Dimensions

L	31.5mm MAX
H	24.5mm MAX
T	14.5mm MAX
S	27.5mm +/-0.4mm
LL	4mm +1mm
F	0.8mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications

Packaging:	Bulk, Tray
Packaging Quantity:	153

General Information

Dielectric:	Metallized PPS
Style:	Radial
Series:	SMR/F211
RoHS:	Yes
Lead:	Wire Leads
Miscellaneous:	The rated voltage decreases 2%/C between +125C and +150C
Notes:	Case Size = FM

Specifications

Capacitance:	22 uF
Capacitance Tolerance:	2.5%
Voltage DC:	50 VDC
Voltage AC:	30 VAC
Temperature Range:	-55/+150C
Rated Temperature:	125C
Dissipation Factor:	0.15% 1kHz, 0.35% 10kHz
Insulation Resistance:	227.27 MOhms
Max dVdt:	2 V