


Earthing Straps

Ready-made Earthing Strap

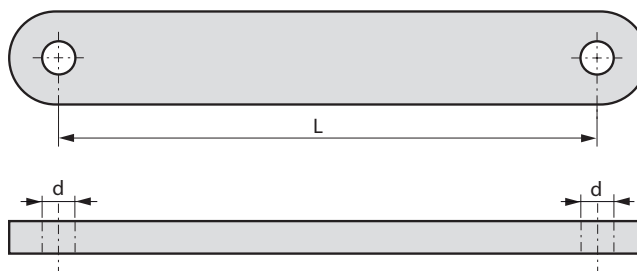

Earthing wire, suitable for earthing moving parts

SPECIFICATION:

Conductor	Stranded Tin-Plated Copper Wire
Shielding	Unshielded

PRODUCT RANGE:

Art. Nr.	Cross-section	Cross-section AWG	d	L	Max. cross-section AWG
JORDNFL.150/6/6,5	6 mm ²	9 AWG	6.5 mm	0.15 m	9 AWG
JORDNFL.150/10/6,5	10 mm ²	7 AWG	6.5 mm	0.15 m	7 AWG
JORDNFL.300/10/6,5	10 mm ²	7 AWG	6.5 mm	0.30 m	7 AWG
JORDNFL.100/16/8,5	16 mm ²	5 AWG	8.5 mm	0.10 m	5 AWG
JORDNFL.150/16/8,5	16 mm ²	5 AWG	8.5 mm	0.15 m	5 AWG
JORDNFL.200/16/8,5	16 mm ²	5 AWG	8.5 mm	0.20 m	5 AWG
JORDNFL.250/16/8,5	16 mm ²	5 AWG	8.5 mm	0.25 m	5 AWG
JORDNFL.100/25/10	25 mm ²	3 AWG	10 mm	0.10 m	3 AWG
JORDNFL.200/25/10	25 mm ²	3 AWG	10 mm	0.20 m	3 AWG