


Cable type: 3x2x24 AWG Li2YSt(St)Y

Csw code: H2A24030232

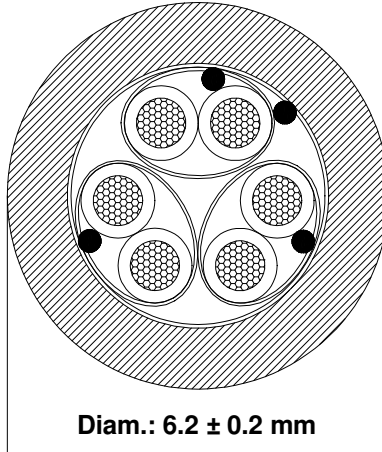

CONSTRUCTION

Conductors	Bare copper (section 24AWG) according to UL 1581 Tab 20.1
Insulation	Polyolefine compound Colour code: 4 conductors TAB 47100 Diameter: 1.20 ± 0.1 mm
Pairs	3 pairs TAB 47100
Shield (each pair)	Aluminium/Polyester tape (Alu outside)
Drain wire (each pair)	Tinned copper (Section 24AWG) according to UL 1581 Tab 20.1
Tape (each pair)	Polyester tape
Total assembly	3 pairs TAB 47100 twisted + Aluminium/Polyester tape (Alu outside)
Drain wire	Tinned copper (Section 24AWG) according to UL 1581 Tab 20.1
Tape	Polyester tape
Sheath	PVC compound Colour code: Grey Ral 7032 Overall diameter: 6.2 ± 0.2 mm
Marking	4303 DIN

GENERAL PROPERTIES

Minimum bending radius	15 x D
Temperature range	- 5°C + 80°C
Working voltage	300 V
Test voltage	1500 V
Conductor resistance	87.6 Ω/Km max. at 20°C
Insulation resistance	20 MΩ.Km min. at 20°C

RoHS This cable is conform to RoHS directive

Rev.:	Object:	Date:	Comp.:
-------	---------	-------	--------

Date: 11/09/13	Comp.: pc	Checked: ag	Pag 1 of 1
----------------	-----------	-------------	------------