

HUBER+SUHNER® DATA SHEET

Type: Sucoflex Assemblies




Description

ID (Product Code) 84017161
Description (Product) SF104/11N47/11N47/3000mm

Product Configuration

Cable SUCOFLEX_104
Connector A SF_11_N-47
Connector B SF_11_N-47

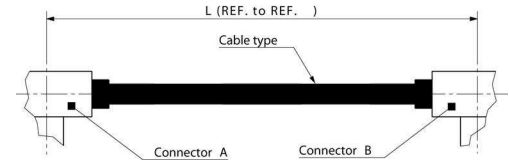

Technical Data

Electrical Data

Impedance 50 Ω
Operating Frequency 0.018 GHz to 18 GHz
Min. Return Loss ≥ 17 dB
Max. Attenuation 3.8 dB
Frequency range (GHz) 0.018 to 15 15 to 18
Return loss (dB) ≥ 19 ≥ 17
Max. Attenuation 3.44 3.8
Max. VSWR 1.25

Mechanical Data

Length REF/REF 3000 mm
Min. Bending Radius repeated 25 mm
Max. Tensile Force 250 N
Weight 0.275 kg

Environmental Data

Operating Temperature -65 °C... + 125 °C
Waterproof IP 65
2002/95/EC, RoHS compliant
2002/96/EC, WEEE

Related Documents

Data Sheet Cable DOC-0000177902
Data Sheet Connector A DOC-0000272772
Data Sheet Connector B DOC-0000272772

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.



HUBER+SUHNER AG
RF Technology
9100 Herisau, Switzerland
Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 45 90
www.hubersuhner.com

HUBER+SUHNER – Excellence in Connectivity Solutions