



Refrigerated Air Dryer

For use in Europe, Asia and Oceania

EC Directive compliant (with CE marking)

Power supply voltage:
Single-phase 230 VAC (50 Hz)

Series **IDFA□E**

Refrigerant **R134a(HFC)**
R407C(HFC)

Coefficient of destruction
for ozone is zero.

Improved corrosion resistance with
the use of stainless steel, plate type
heat exchanger (IDFA4E to 75E)

New
IDFA55E, 75E
are added!



Series	Air flow capacity (m ³ /h [ANR])			Refrigerant	Rated inlet condition	Port size
	Outlet air pressure dew point					
	3°C	7°C	10°C			
IDFA3E	12	15	17	R134a (HFC)	35°C 0.7 MPa	Rc 3/8
IDFA4E	24	31	34			Rc 1/2
IDFA6E	36	46	50			Rc 3/4
IDFA8E	65	83	91			Rc 1
IDFA11E	80	101	112			R 1
IDFA15E	120	152	168			R 1 1/2
IDFA22E	182	231	254			R 2
IDFA37E	273	347	382	R407C (HFC)		
IDFA55E	390	432	510			
IDFA75E	660	720	822			


INDEX

1. Standard Products

Series IDFA

Standard inlet air type

Rated inlet air temperature: 35°C

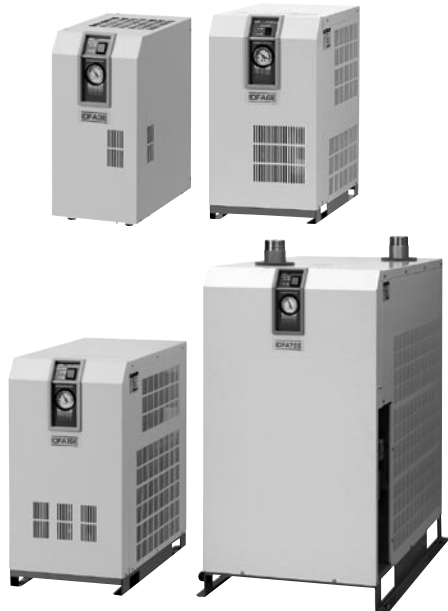

Model	Rated inlet condition	Air flow capacity (m³/h [ANR])			Refrigerant	Port size	Page
		Outlet air pressure dew point					
		3°C	7°C	10°C			
IDFA3E	35°C 0.7 MPa	12	15	17	R134a (HFC)	Rc 3/8	P. 3 to 5
IDFA4E		24	31	34		Rc 1/2	
IDFA6E		36	46	50		Rc 3/4	
IDFA8E		65	83	91			
IDFA11E		80	101	112			
IDFA15E		120	152	168		Rc 1	
IDFA22E		182	231	254	R407C (HFC)	R 1	P. 6 to 8
IDFA37E		273	347	382		R 1½	
IDFA55E		390	432	510		R 2	
IDFA75E		660	720	822			

2. Options

Specifications	Applicable model	Suffix (Option symbol)	Page
Cool compressed air output	IDFA3E to 11E	IDFA□E-23-A	P. 9
Anti-corrosive treatment	IDFA3E to 75E	IDFA□E-23-C	
For 1.6 MPa application (Auto drain bowl type: Metal bowl with level gauge)	IDFA6E to 37E	IDFA□E-23-K	
With heavy duty auto drain (Applicable to 1.6 MPa)	IDFA4E to 75E	IDFA□E-23-L	
With circuit breaker	IDFA4E to 75E	IDFA□E-23-R	P. 10
With terminal block for power supply, run & alarm signal and remote operation	IDFA4E to 75E	IDFA□E-23-T	
With timer-type solenoid valve (Applicable to 1.6 MPa)	IDFA4E to 75E	IDFA□E-23-V	

3. Optional Accessories

Description	Page
Dust-protecting filter set	P. 11
Foundation bolt set	
By-pass piping set	

4. Data (Condensed Water Calculation, Dew Point Conversion Chart) ... P. 12

5. Safety Instructions ... Back page 1 to 3

Series IDFA□E

Model Selection

The corrected air flow capacity, which considers the user's operating conditions, is required for selecting the air dryer. Please select using the following procedures.

1 Read the correction factor.

Obtain the correction factor A to D suitable for your operating condition using the table below.

2 Calculate the corrected air flow capacity.

Obtain the corrected air flow capacity from the following formula.
Corrected air flow capacity = Air consumption ÷ (Correction factor A x B x C)

3 Select the model.

Select the model which air flow capacity exceeds the corrected air flow capacity using the specification table. (For air flow capacity, refer to the data D below.)

4 Option

5 Finalise the model number.

6 Select accessories sold separately.

IDFA E Selection Example

Condition	Data symbol	Correction factor ^{Note)}
Inlet air temperature	40°C	A
Ambient temperature	35°C	B
Inlet air pressure	0.5 MPa	C
Air consumption	31 m ³ /h	—

Note) Values obtained from the table below.

Corrected air flow capacity = 31 m³/h ÷ (0.83 x 0.83 x 0.92) = 48.9 m³/h

According to the corrected air flow capacity of 48.9 m³/h, the **IDFA8E** will be selected when the required output air pressure dew point is 3°C. The **IDFA6E** will be selected when the required pressure dew point is 10°C.

Refer to page 3, 6.

Refer to page 3, 6.

Refer to page 11.

Data A: Inlet Air Temperature

Inlet air temperature (°C)	Correction factor	
	IDFA3E to 37E	IDFA55E to 75E
5 to 25	1.30	1.33
30	1.25	1.16
35	1	1
40	0.83	0.8
45	0.7	0.64
50	0.6	0.48

Data B: Ambient Temperature

Ambient temperature (°C)	Correction factor	
	IDFA3E to 11E	IDFA15E to 75E
20	1.1	1.1
25	1	1
30	0.91	0.97
35	0.83	0.89
40	0.79	0.77

Data C: Inlet Air Pressure

Inlet air pressure (MPa)	Correction factor	
	IDFA3E to 11E	IDFA15E to 75E
0.3	0.80	0.72
0.4	0.87	0.81
0.5	0.92	0.88
0.6	0.96	0.95
0.7	1.00	1.00
0.8	1.04	1.06
0.9	1.07	1.11
1	1.1	1.16
1.2	1.16	1.21
1.4	1.21	1.25
1.6	1.25	1.27

Data D: Air Flow Capacity

Model	Outlet air pressure dew point	Air flow capacity (m ³ /h [ANR])				
		IDFA3E	IDFA4E	IDFA6E	IDFA8E	IDFA11E
3°C	3°C	12	24	36	65	80
	7°C	15	31	46	83	101
	10°C	17	34	50	91	112

Note) In case of "Option A (Cool compressed air output)", the air flow capacity is different. Refer to page 9 for details.


Model	Outlet air pressure dew point	Air flow capacity (m ³ /h [ANR])				
		IDFA15E	IDFA22E	IDFA37E	IDFA55E	IDFA75E
3°C	3°C	120	182	273	390	660
	7°C	152	231	347	432	720
	10°C	168	254	382	510	822

Refrigerant R134a (HFC)

Series IDFA□E

3E, 4E, 6E, 8E, 11E, 15E
(Inlet air temperature: 35°C)

How to Order

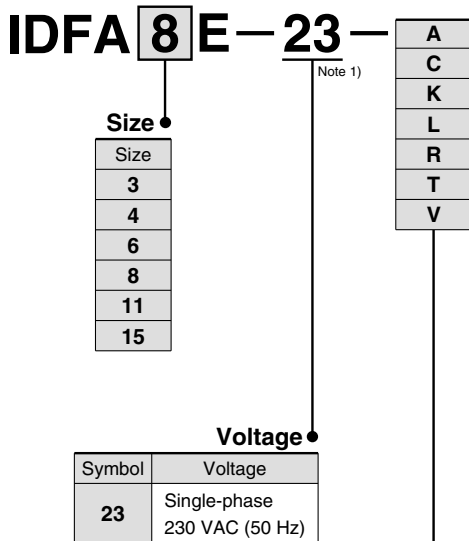

Options and Available Combinations (Size/Option)

Symbol ^{Note 2)}	Nil	A	C	K	L	R	T	V
Option	None	Cool compressed air output	Anti-corrosive treatment	For medium air pressure (Auto drain bowl type: Metal bowl with level gauge)	With heavy duty auto drain (Applicable to medium air pressure)	With circuit breaker	With terminal block for run & alarm signal	With timer-type solenoid valve (Applicable to medium air pressure)
Size								
3	●	●	●	—	—	—	—	—
4	●	●	●	—	●	●	●	●
6	●	●	●	●	●	●	●	●
8	●	●	●	●	●	●	●	●
11	●	●	●	●	●	●	●	●
15	●	—	●	●	●	●	●	●

Note 1) G thread (PF thread) can accept the R thread (PT male thread), thus make no "F" in the thread specification setting. A conversion adaptor for the R thread (PT male thread) is also contained.

Note 2) Enter alphabetically when multiple options are combined.

However, the following combination cannot be achieved.

- Combination of K, L and V cannot be achieved because an auto drain can only be attached to a single option.


Note 3) Refer to page 9 for further details on optional specifications.

Standard Specifications



Specifications		Model	Standard temperature air inlet							
			IDFA3E	IDFA4E	IDFA6E	IDFA8E	IDFA11E	IDFA15E		
Operating range	Fluid		Compressed air							
	Inlet air temperature (°C)		5 to 50							
	Inlet air pressure (MPa)		0.15 to 1.0							
Rated specifications (Note 3)	Air flow capacity m ³ /h	Standard condition (ANR) (Note 1)	2 to 40 (Relative humidity of 85% or less)							
		Outlet air pressure dew point (3°C)	12	24	36	65	80	120		
		Outlet air pressure dew point (7°C)	15	31	46	83	101	152		
	Compressor intake condition (Note 2)	Outlet air pressure dew point (3°C)	17	34	50	91	112	168		
		Outlet air pressure dew point (7°C)	13	25	37	68	83	125		
		Outlet air pressure dew point (10°C)	16	32	48	86	105	158		
Electric	Inlet air pressure (MPa)		0.7							
	Inlet air temperature (°C)		35							
	Ambient temperature (°C)		25							
Electric	Power supply voltage		Single-phase: 230 VAC [Voltage fluctuation ±10%] 50 Hz							
	Power consumption (W)		180		208		385		470	
	Operating current (A)		1.2		1.4		2.7		3.0	
Applicable circuit breaker capacity (Note 4) (A)			5						10	
Condenser			Air-cooled							
Refrigerant			R134a (HFC)							
Auto drain			Float type (Normally closed)			Float type (Normally open)				
Port size			Rc 3/8	Rc 1/2	Rc 3/4		Rc 1			
Accessory			Hexagon nipple							
Weight (kg)			18	22	23	27	28	46		
Coating colour			Body panel: White 1 Base: Gray 2							
Compliant standards			EC Directive (with CE marking)							

JIS Symbol



Note 1) Air flow capacity under the standard condition (ANR) [atmospheric pressure at 20°C, relative humidity at 65%]

Note 2) Air flow capacity converted by the compressor intake condition [atmospheric pressure at 32°C]

Note 3) Select air dryer according to the model selection method (page 2) for the models beyond the rated specifications.

Note 4) Install a circuit breaker with a sensitivity of 30 mA.


Note 5) When a short-term interruption of the power supply (including momentary interruption) occurs in this equipment, the restarting of normal operations may require some time or may be impossible due to the operation of protective devices even after the supply of power returns.

Replacement Parts

Model	IDFA3E	IDFA4E	IDFA6E	IDFA8E	IDFA11E	IDFA15E
Auto drain replacement parts no. (Note 5)	AD38		AD48			

Note 6) The part number for the auto drain components without including the body part.


Body part replacement is impossible.



Construction (Air/Refrigerant Circuit)


Humid, hot air coming into the air dryer will be cooled down by a cooler re-heater (heat exchanger). Water condensed at this time will be removed from the air by auto drain and drained out automatically. Air separated from the water will be heated by a cooler re-heater (heat exchanger) to obtain the dried air, which goes through to the outlet side.

IDFA3E

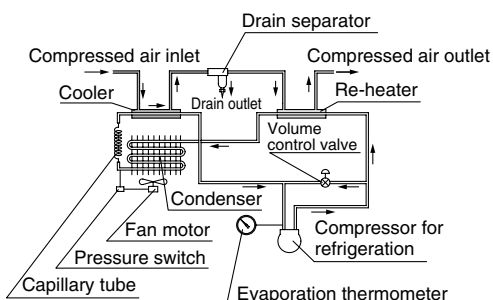

IDFA4E, IDFA6E




IDFA8E, IDFA11E, IDFA15E

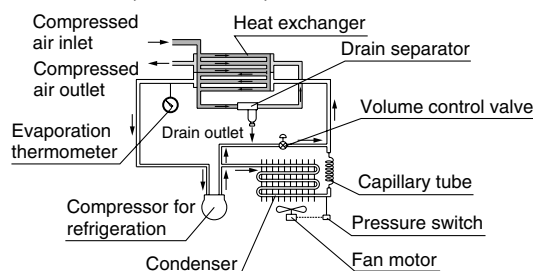



Series IDFA□E

Dimensions




IDFA3E to 15E

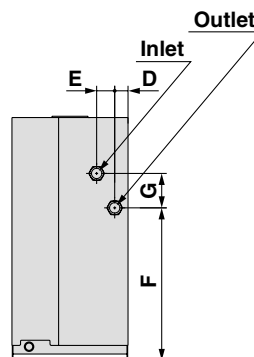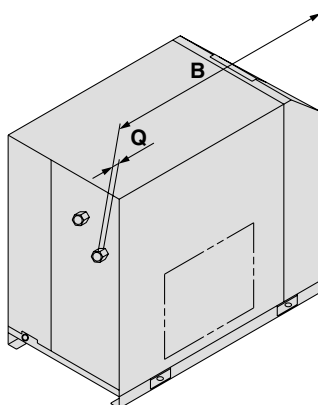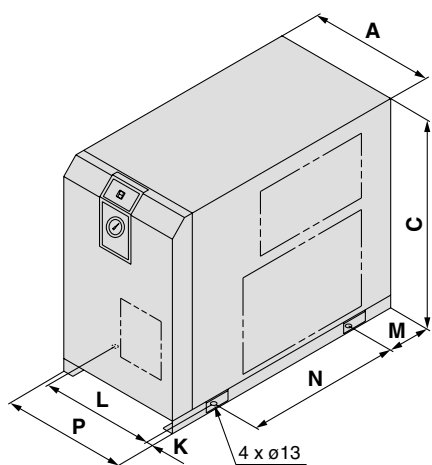

IDFA4E to 11E

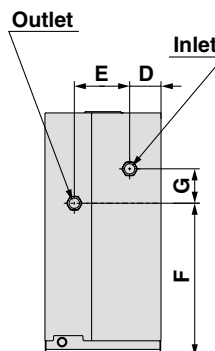

In case of IDFA3E

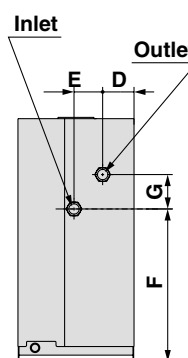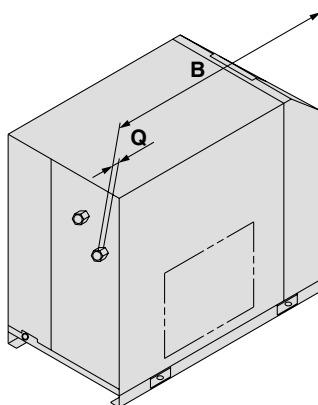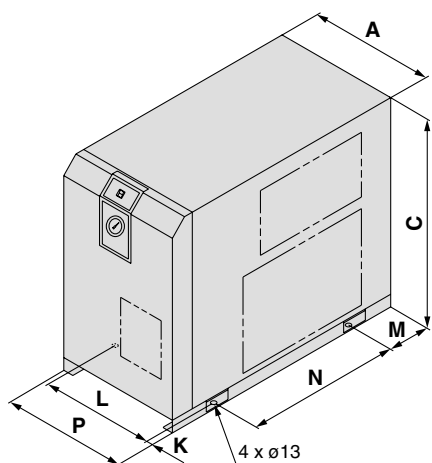

In case of IDFA15E

Dimensions

(mm)

Model	Port size	A	B	C	D	E	F	G	K*	L*	M*	N*	P	Q
IDFA3E	Rc 3/8	226	410	473	67	125	304	33	36	154	21	330		15
IDFA4E	Rc 1/2		453	498			283					275		13
IDFA6E		270	455		31	42		80	15	240	80			15
IDFA8E	Rc 3/4		485	568			355					300		
IDFA11E														
IDFA15E	Rc 1	300	603	578	41	54	396	87		43	101	380	314	16

* Meaning the foot dimensions for the IDFA3E.


Refrigerant R407C (HFC)

Series IDFA□E

22E, 37E, 55E, 75E

(Inlet air temperature: 35°C)

How to Order

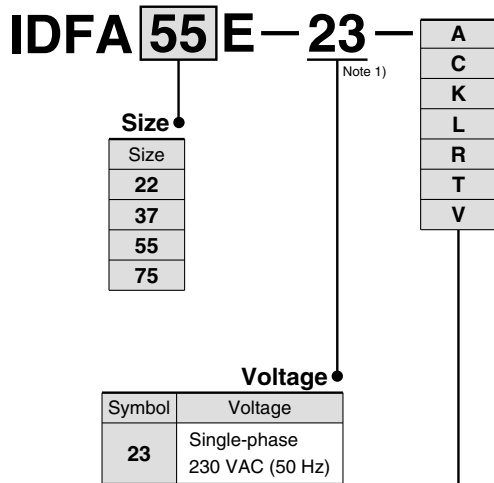

Options and Available Combinations (Size/Option)

Symbol ^{Note 2)}	Nil	A	C	K	L	R	T	V
Option	None	Cool compressed air output	Anti-corrosive treatment	For 1.6 MPa application (Auto drain bowl type: Metal bowl with level gauge)	With heavy duty auto drain (Applicable to 1.6 MPa)	With circuit breaker	With terminal block for run & alarm signal	With timer-type solenoid valve (Applicable to 1.6 MPa)
Size								
22	●	—	●	●	●	●	●	●
37	●	—	●	●	●	●	●	●
55	●	—	●	—	●	●	●	●
75	●	—	●	—	●	●	●	●

Note 1) G thread (PF thread) can accept the R thread (PT male thread), thus make no "F" in the thread specification setting.

Note 2) Enter alphabetically when multiple options are combined.

However, the following combination cannot be achieved.

- Combination of K, L and V cannot be achieved because an auto drain can only be attached to a single option.


Note 3) Refer to page 9 for further details on optional specifications.

Standard Specifications



Specifications		Model	Standard temperature air inlet			
			IDFA22E	IDFA37E	IDFA55E	IDFA75E
Operating range	Fluid	Compressed air				
	Inlet air temperature (°C)	5 to 50				
	Inlet air pressure (MPa)	0.15 to 1.0				
	Ambient temperature (Humidity) (°C)	2 to 40 (Relative humidity of 85% or less)				
Rated specifications (Note 3)	Air flow capacity (m ³ /h)	Standard condition (ANR) (Note 1) Outlet air pressure dew point (3°C)	182	273	390	660
		Outlet air pressure dew point (7°C)	231	347	432	720
		Outlet air pressure dew point (10°C)	254	382	510	822
	Compressor intake condition (Note 2)	Outlet air pressure dew point (3°C)	189	284	405	686
		Outlet air pressure dew point (7°C)	240	361	449	748
		Outlet air pressure dew point (10°C)	264	397	530	854
Rated specifications	Inlet air pressure (MPa)	0.7				
	Inlet air temperature (°C)	35				
	Ambient temperature (°C)	25				
Electric	Power supply voltage	Single-phase: 230 VAC [Voltage fluctuation ±10%] 50 Hz				
	Power consumption (W)	760	1130	1700		
	Operating current (A)	4.3	5.4	7.9		
	Applicable circuit breaker capacity (Note 4) (A)	10			20	
Condenser		Air-cooled				
Refrigerant		R407C (HFC)				
Auto drain		Float type (Normally open)				
Port size		R 1	R 1½	R 2		
Accessory		—				
Weight (kg)		54	62	100	116	
Coating colour		Body panel: White 1 Base: Gray 2				
Compliant standards		EC Directive (with CE marking)				

JIS Symbol



Note 1) Air flow capacity under the standard condition (ANR) [atmospheric pressure at 20°C, relative humidity at 65%]

Note 2) Air flow capacity converted by the compressor intake condition [atmospheric pressure at 32°C]

Note 3) Select air dryer according to the model selection method (page 2) for the models beyond the rated specifications.


Note 4) Install a circuit breaker with a sensitivity of 30 mA.

Note 5) When a short-term interruption of the power supply (including momentary interruption) occurs in this equipment, the restarting of normal operations may require some time or may be impossible due to the operation of protective devices even after the supply of power returns.

Replacement Parts

Model	IDFA22E	IDFA37E	IDFA55E	IDFA75E
Auto drain replacement parts no. (Note 5)	AD48			


Note 6) The part number for the auto drain components without including the body part.
Body part replacement is impossible.



Construction (Air/Refrigerant Circuit)


Humid, hot air coming into the air dryer will be cooled down by a cooler re-heater (heat exchanger). Water condensed at this time will be removed from the air by auto drain and drained out automatically. Air separated from the water will be heated by a cooler re-heater (heat exchanger) to obtain the dried air, which goes through to the outlet side.

IDFA22E, IDFA37E, IDFA55E, IDFA75E

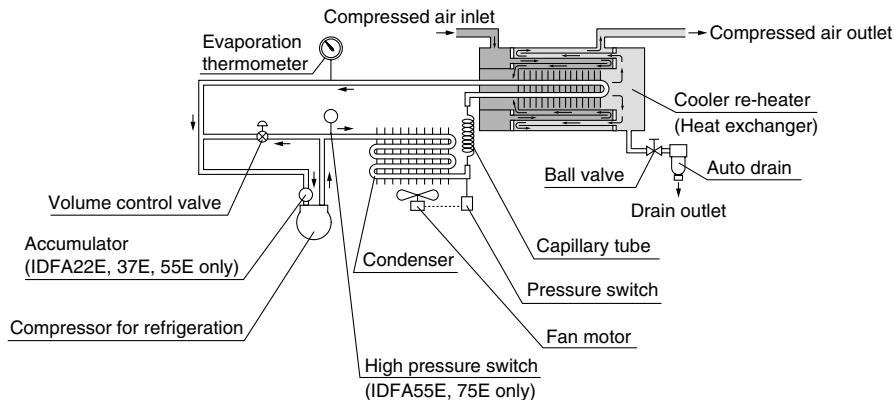

Dimensions

IDFA22E, IDFA37E

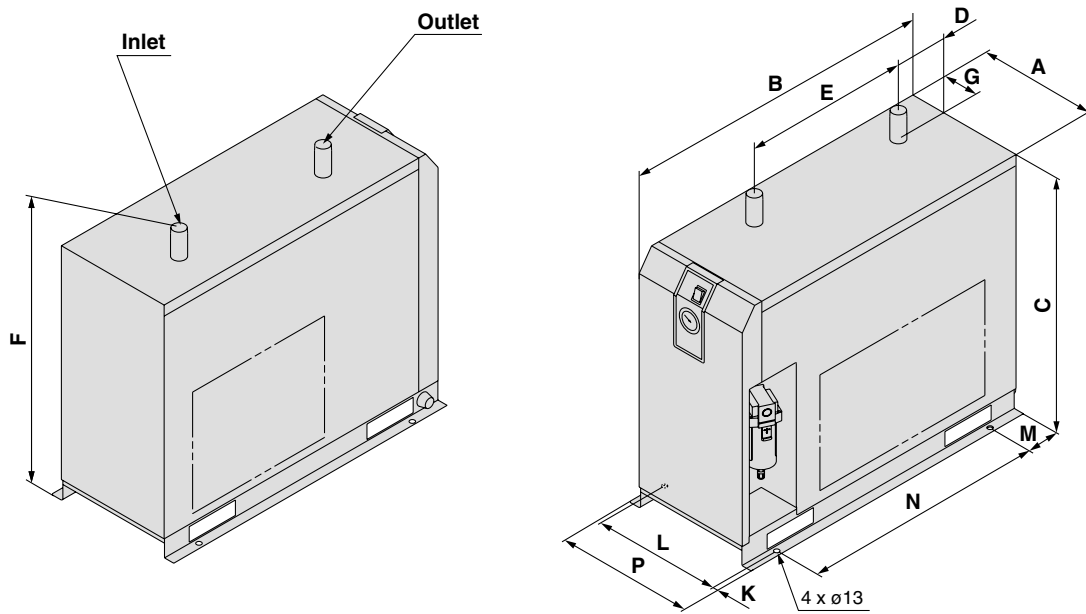


Dimensions

(mm)

Model	Port size	A	B	C	D	E	F	G	K	L	M	N	P	Q
IDFA22E	R 1	290	775	623	134	405	698	93	13	25	85	600	340	—
IDFA37E	R 1½	290	855	623	134	405	698	93	13	25	85	680	340	—

IDFA55E, IDFA75E

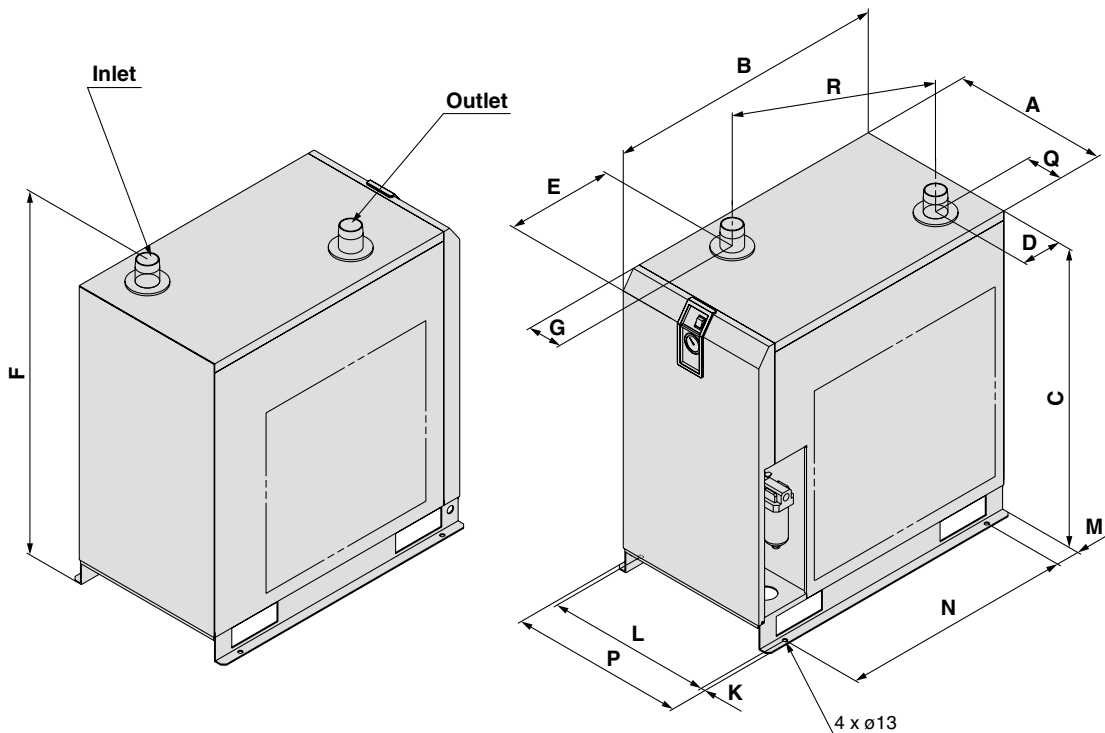

Dimensions

(mm)

Model	Port size	A	B	C	D	E	F	G	K	L	M	N	P	Q	R
IDFA55E	R 2	470	855	800	(128)	(273)	(868)	(110)	13	500	75	700	526	(110)	519
IDFA75E	R 2	470	855	900	(128)	(273)	(968)	(110)	13	500	75	700	526	(110)	519

Series IDFA□E

Options 1

For “How to Order” optional models, refer to page 3 and 6.

A Option symbol

Cool compressed air output IDFA3E to 11E

There is no heating of cooled, dehumidified air as it leaves the air dryer. The air flow capacity with this option is smaller than that of the standard dryer. (The external dimensions are identical to the standard product.)
 (Note) Perform thermal insulation treatment to the piping and equipment installed after the dryer to prevent the formation of condensation.

Air Flow Capacity

Model	IDFA3E	IDFA4E	IDFA6E	IDFA8E	IDFA11E
Air flow capacity m ³ /h (ANR)	18	23	29	32	39

Conditions: Inlet air pressure: 0.7 MPa, Inlet air temperature: 35°C,
 Outlet air temperature: 10°C Ambient temperature: 25°C

C Option symbol

Anti-corrosive treatment IDFA all models

This minimises the corrosion of the copper and copper alloy parts when the air dryer is used in an atmosphere containing hydrogen sulfide or sulfuric acid gas. (Corrosion cannot be completely prevented.)
 Special epoxy coating: Copper tube and copper alloy parts.
 The coating is not applied on the heat exchanger or around electrical parts, as operation may be affected by the coating.
 * Corrosion is not covered under warranty.

K Option symbol

For 1.6 MPa applications (Auto drain bowl type: Metal bowl with level gauge) IDFA6E to 37E

The auto drain is changed from the standard one to one with a medium pressure specification. A metal bowl with a level gauge which can confirm the water level is used for the auto drain.

Specifications

1. Maximum operating pressure: 1.6 MPa
2. Dimensions ... same as standard products

Replacement Parts

Model	Auto drain assembly part no.	Note
IDFA6E to 15E	IDF-S0086	The AD48-8-X2110 auto drain, insulator, and one-touch fitting are included.
IDFA22E, 37E	AD48-8-X2110	Single auto drain unit

L Option symbol


With heavy duty auto drain (Applicable to 1.6 MPa) IDFA4E to 75E

The float type auto drain used in the standard air dryer is replaced with a heavy duty auto drain (ADH4000-04) which enables the drainage to discharge more efficiently.


Dimensions (mm)

Model	A
IDFA4E	55
IDFA6E	67
IDFA8E, 11E	139
IDFA15E	47

IDFA4E to 15E

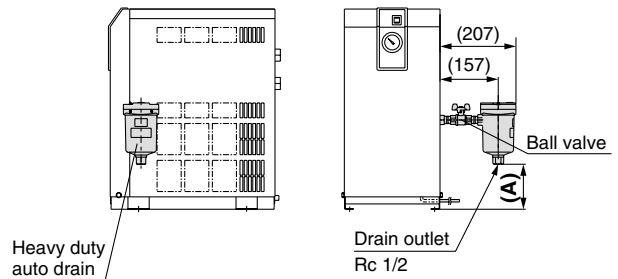

IDFA22E to 75E

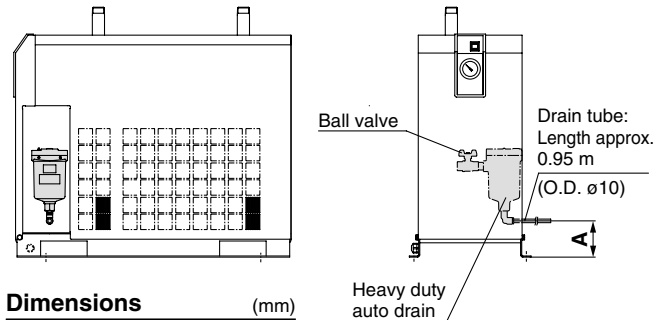

Dimensions (mm)

Model	A
IDFA22E, 37E	Approx. 100
IDFA55E, 75E	Approx. 50

Note 1) The heavy duty auto drain and the ball valve are both enclosed in the same shipping package as the main body of the air dryer. Customers are required to mount the parts to the air dryer. (Except IDFA22E to 75E)

Note 2) Customers will need to supply the fitting and tubing for the drain piping. (Except IDFA22E to 75E)

Replacement Parts: Heavy Duty Auto Drain

Model	Replacement parts no. (Description)	Configuration
IDFA4E to 75E	ADH-E400 (Replacement kit for exhaust mechanism)	

Series IDFA□E

Options 2


For “How to Order” optional models, refer to page 3 and 6.

R Option symbol

With circuit breaker IDFA4E to 75E


A circuit breaker with cover is attached to the side of the air dryer. This saves additional electrical wiring at the time of installation.

IDFA4E to 15E

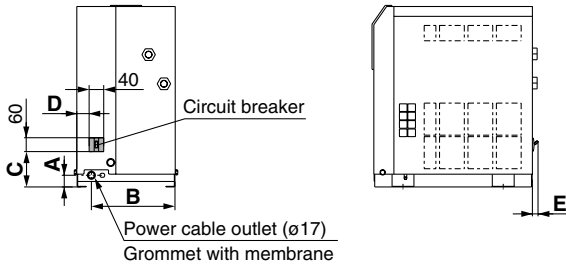

Dimensions (mm)					
Model	A	B	C	D	E
IDFA4E, 6E, 8E, 11E	32	230	97	34	15
IDFA15E	43	258	102	82	—

IDFA22E to 75E

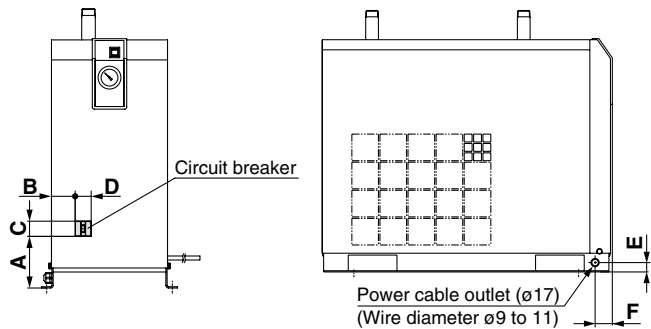

Dimensions (mm)						
Model	A	B	C	D	E	E
IDFA22E	125	59	60	40	25	46
IDFA37E	148	81		60	50	36
IDFA75E	133	73				

Breaker Capacity and Sensitivity Current

Voltage	Model	Breaker capacity	Sensitivity current
230 V type	IDFA4E-23, IDFA6E-23 IDFA8E-23, IDFA11E-23	5 A	30 mA
	IDFA15E-23, IDFA22E-23 IDFA37E-23, IDFA55E-23	10 A	
	IDFA75E-23	20 A	

T Option symbol

With terminal block for power supply, run & alarm signal and remote operation IDFA4E to 75E

In addition to the terminals for the power supply, terminals for the operating signal and the error signal are also available. (No-voltage contact)


Also, in the case of remote control, operate it from the power supply side while the air dryer switch remains ON.

Contact capacity: 230 VAC, 4 A 24 VDC, 5 A for operating and error signals.

Minimum current value: 20 V, 5 mA (AC/DC) for operating and error signals.


Note) Please be sure to confirm the electric circuits with the drawings or instruction manual before using the output signal.

IDFA4E to 15E

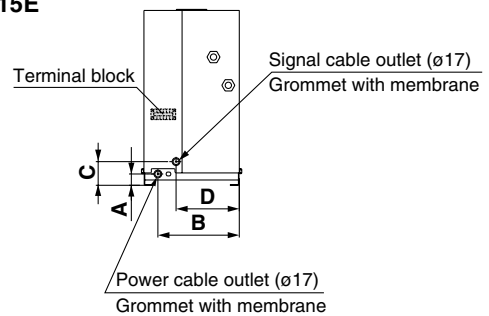

Dimensions (mm)				
Model	A	B	C	D
IDFA4E, 6E, 8E, 11E	32	230	67	179
IDFA15E	43	258	77	158

IDFA22E to 75E

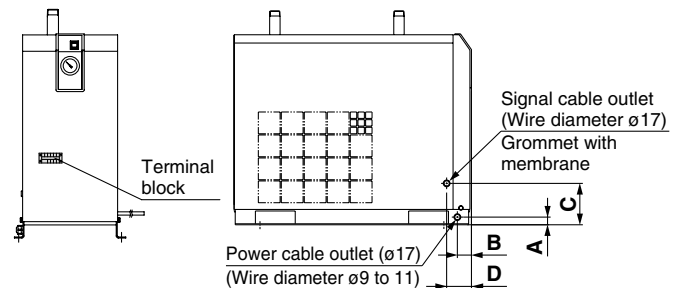

Dimensions (mm)				
Model	A	B	C	D
IDFA22E, 37E	25	46	135	81
IDFA55E, 75E	50	36	207	81

V Option symbol

With timer-type solenoid valve (Applicable to 1.6 MPa) IDFA4E to 75E

Drainage is discharged by controlling a solenoid valve with a timer. A strainer for solenoid valve protection and stop valve are also included.




Maximum operating pressure: 1.6 MPa

* The timer-type solenoid valve actuates once (for 0.5 s) every 30 s.

Replacement Parts

Model	Part no.	Note
IDFA4E to 37E	IDF-S0198	230 VAC
IDFA55E, 75E	IDF-S0302	230 VAC

Optional Accessories

	Features	Specifications	Applicable dryer
Dust-protecting filter set 	Prevents a decline in the performance of the air dryer, even in a dusty atmosphere.	Max. ambient temperature 40°C	IDFA3E to 75E
Foundations bolt set 	Bolts for fixing the air dryer to the foundations. Easy to secure by striking its axle.	Stainless steel	IDFA4E to 75E
By-pass piping set 	Easy by-pass piping (connect this set to the air dryer), allowing substantial reduction in the installation time.	Max. operating pressure 1.0 MPa Max. operating temperature 60°C	IDFA3E to 75E

How to Order

Dust-protecting filter set

IDF — FL 209

Applicable dryer

Symbol	Applicable dryer
201	IDFA3E
202	IDFA4E
203	IDFA6E
204	IDFA8E
205	IDFA11E
206	IDFA15E
207	IDFA22E
208	IDFA37E
213	IDFA55E
214	IDFA75E

Foundation bolt set

IDF — AB 500

Applicable dryer

Symbol	Applicable dryer
500	IDFA4E to 75E

By-pass piping set (Rc, R thread)


IDF — BP 302

Applicable dryer

Symbol	Applicable dryer	Thread type
302	IDFA3E	Rc
303	IDFA4E	
304	IDFA6E to 11E	
316	IDFA15E	
317	IDFA22E	R
318	IDFA37E	
325	IDFA55E	
	IDFA75E	

Note) Not applicable to the medium air pressure (1.6 MPa) spec.


Dust-protecting Filter Set / Dimensions

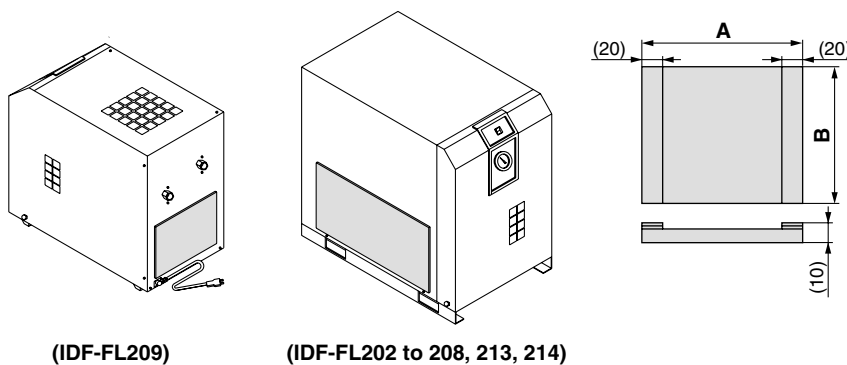

Dimensions

Part no.	Applicable dryer	A	B	Weight (g)
IDF-FL201	IDFA3E	220	240	35
IDF-FL202	IDFA4E	310	195	45
IDF-FL203	IDFA6E	375		55
IDF-FL204	IDFA8E	340	265	70
IDF-FL205	IDFA11E	375		75
IDF-FL206	IDFA15E	310	270	70
IDF-FL207	IDFA22E	420	315	100
IDF-FL208	IDFA37E	550	365	140
IDF-FL213	IDFA55E	720	400	175
IDF-FL214	IDFA75E	610	560	190

Foundation Bolt Set / Dimensions

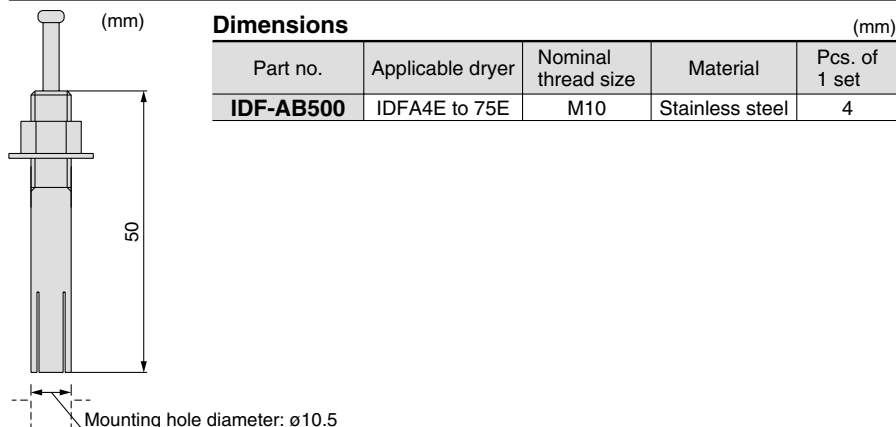


Part no.	Applicable dryer	Nominal thread size	Material	Pcs. of 1 set
IDF-AB500	IDFA4E to 75E	M10	Stainless steel	4

Optional Accessories


Dimensions

[Bypass piping set]
IDFA3E

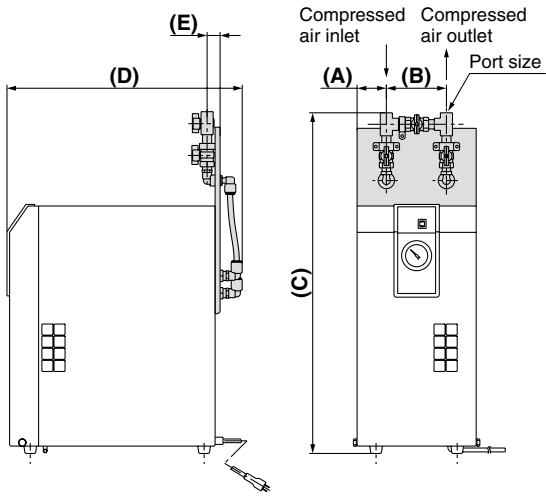


Dimensions (mm)								
Part No.	Applicable dryer	Port size Rc	A	B	C	D	E	Weight (kg)
IDF-BP302	IDFA3E	3/8	56	114	642	445	21	1.6

IDFA4E to 15E

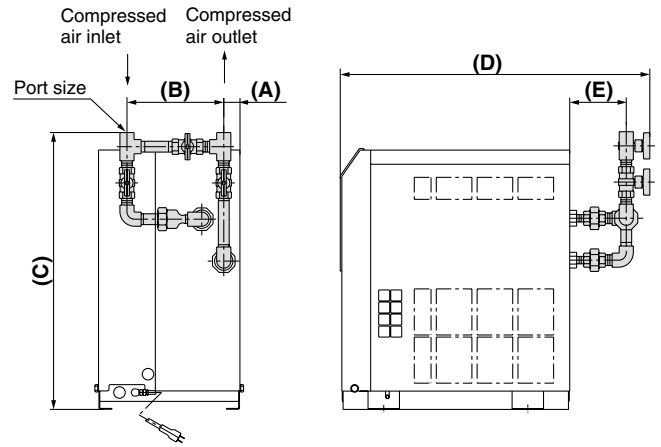



Dimensions (mm)								
Part No.	Applicable dryer	Port size Rc	A	B	C	D	E	Weight (kg)
IDF	IDF-BP303	IDFA4E	31	175	531	595	110	2.3
		IDFA6E			555	617		
	IDF-BP304	IDFA8E	3/4	187	627	647	129	3.3
		IDFA11E						
IDF-BP316	IDFA15E	1	41	210	710	774	136	5.3

IDFA22E, 37E

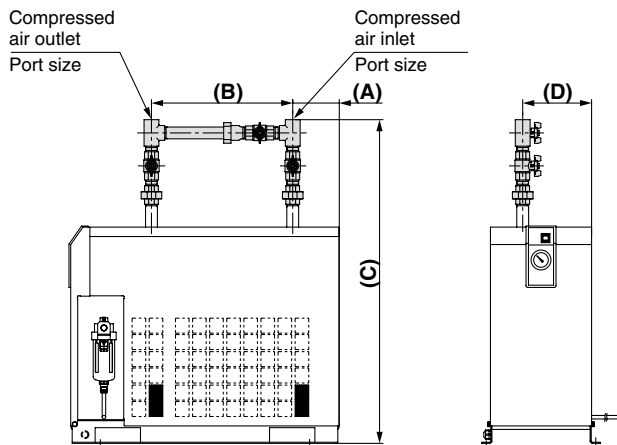

Dimensions (mm)							
Part No.	Applicable dryer	Port size Rc	A	B	C	D	Weight (kg)
IDF-BP317	IDFA22E	1	134	405	928	198	4.4
IDF-BP318	IDFA37E	1 1/2			980		7.7


IDFA55E, 75E

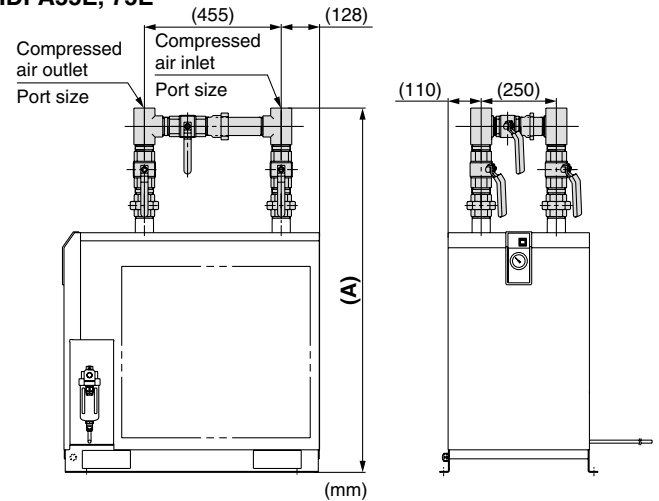

Port Size


Part No.	Applicable dryer	Port size Rc	A	Weight (kg)
IDF-BP325	IDFA55E	2	1191	12.3
	IDFA75E			

Condensed Water Calculation

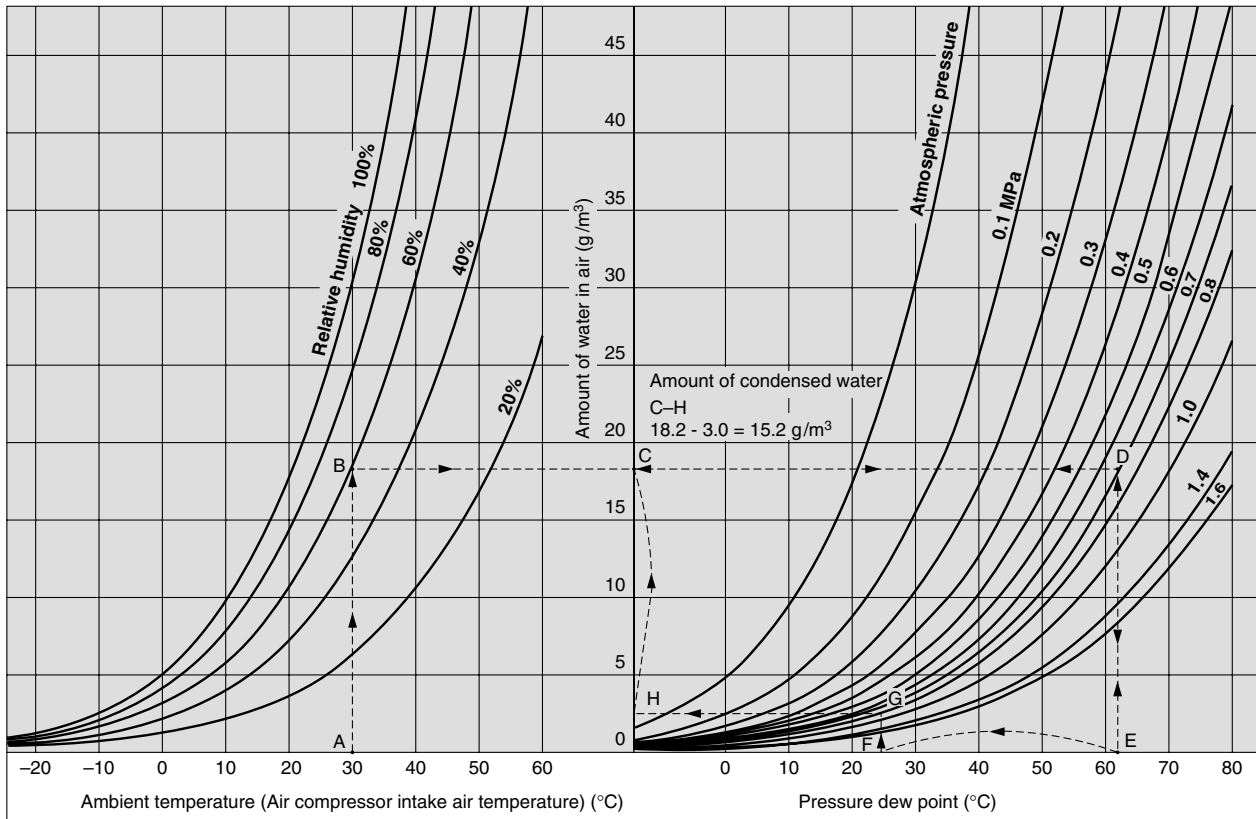

How to calculate the amount of condensed water
 Example) To obtain the amount of condensed water when the inlet air of a compressor is pressurized to 0.7 MPa then cooled down to 25°C. Given an ambient temperature of 30°C and a relative humidity of 60%.

Dew Point Conversion Chart

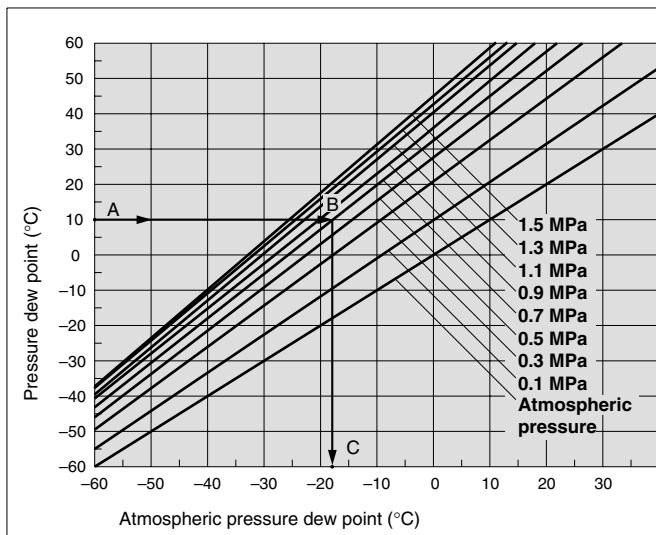

How to read the dew point conversion chart
 Example) To obtain the atmospheric dew point at a pressure dew point of 10°C, and a pressure of 0.7 MPa.

- Trace the arrow mark from point A of ambient temperature 30°C to obtain the intersection B on the curved line for the relative humidity of 60%.
- Trace the arrow mark from the intersection B to obtain the intersection D on the curved line for the 0.7 MPa pressure characteristics.
- Trace the intersection D to obtain the intersection E.
- The intersection E is the pressure dew point at 0.7 MPa with an ambient temperature of 30°C and a relative humidity of 60%. The value for E is at 62°C.
- Trace the intersection E upward to D and leftward to obtain the intersection C on the vertical line.
- The intersection C is the amount of water which is included in the compressed air 1 m³ at 0.7 MPa, a pressure dew point of 62°C. The amount of water is 18.2 g/m³.
- Trace the arrow mark from F (cooling temperature 25°C (pressure dew point 25°C)) to obtain the intersection G on the pressure characteristic line for 0.7 MPa.
- From the intersection G, trace the arrow mark to obtain the intersection H on the vertical line.
- The intersection H is the amount of water which is included in the compressed air 1 m³ at 0.7 MPa, pressure dew point of 25°C. The amount of water is 3.0 g/m³.
- Therefore, the amount of condensed water is as following. (per 1 m³)
 The amount of water at the intersection C
 – the amount of water at the intersection H
 = the amount of condensed water
 18.2 – 3.0 = 15.2 g/m³






Series IDFA□E

Safety Instructions

These safety instructions are intended to prevent a hazardous situation and/or equipment damage. These instructions indicate the level of potential hazard by labels of "Caution", "Warning" or "Danger". To ensure safety, be sure to observe ISO 4414 ^{Note 1)}, JIS B 8370 ^{Note 2)} and other safety practices.

■ Explanation of the Labels

Labels	Explanation of the labels
 Danger	In extreme conditions, there is a possible result of serious injury or loss of life.
 Warning	Operator error could result in serious injury or loss of life.
 Caution	Operator error could result in injury ^{Note 3)} or equipment damage. ^{Note 4)}

Note 1) ISO 4414: Pneumatic fluid power – General rules relating to systems

Note 2) JIS B 8370: General Rules for Pneumatic Equipment

Note 3) Injury indicates light wounds, burns and electrical shocks that do not require hospitalization or hospital visits for long-term medical treatment.

Note 4) Equipment damage refers to extensive damage to the equipment and surrounding devices.

■ Selection/Handling/Applications

1. The compatibility of the pneumatic equipment is the responsibility of the person who designs the pneumatic system or decides its specifications.

Since the products specified here are used in various operating conditions, their compatibility for the specific pneumatic system must be based on specifications or post analysis and/or tests to meet the specific requirements. The expected performance and safety assurance are the responsibility of the person who has determined the compatibility of the system. This person should continuously review the suitability of all items specified, referring to the latest catalog information with a view to giving due consideration to any possibility of equipment failure when configuring a system.

2. Only trained personnel should operate pneumatically operated machinery and equipment.

Compressed air can be dangerous if handled incorrectly. Assembly, handling or repair of the systems using pneumatic equipment should be performed by trained and experienced operators. (Understanding JIS B 8370 General Rules for Pneumatic Equipment, and other safety rules are included.)

3. Do not service machinery/equipment or attempt to remove components until safety is confirmed.

1. Inspection and maintenance of machinery/equipment should only be performed once measures to prevent falling or runaway of the driven objects have been confirmed.
2. When equipment is removed, confirm the safety process as mentioned above. Turn off the supply pressure for this equipment and exhaust all residual compressed air in the system, and release all the energy (liquid pressure, spring, condenser, gravity).
3. Before machinery/equipment is restarted, take measures to prevent quick extension of a cylinder piston rod, etc.

4. If the equipment will be used in the following conditions or environment, please contact SMC first and be sure to take all necessary safety precautions.

1. Conditions and environments beyond the given specifications, or if the product is used outdoors.
2. Installation on equipment in conjunction with atomic energy, railway, air navigation, vehicles, medical equipment, food and beverages, recreation equipment, emergency stop circuits, clutch and brake circuits in press applications, or safety equipment.
3. An application which has the possibility of having negative effects on people and/or property, requiring special safety analysis.
4. If the products are used in an interlock circuit, prepare a double interlock style circuit with a mechanical protection function for the prevention of a breakdown. And, examine the devices periodically whether they function normally or not.

■ Exemption from Liability

1. SMC, its officers and employees shall be exempted from liability for any loss or damage arising out of earthquakes or fire, action by a third person, accidents, customer error with or without intention, product misuse, and any other damages caused by abnormal operating conditions.

2. SMC, its officers and employees shall be exempted from liability for any direct or indirect loss or damage, including consequential loss or damage, loss of profits, or loss of chance, claims, demands, proceedings, costs, expenses, awards, judgments and any other liability whatsoever including legal costs and expenses, which may be suffered or incurred, whether in tort (including negligence), contract, breach of statutory duty, equity or otherwise.

3. SMC is exempted from liability for any damages caused by operations not contained in the catalogues and/or instruction manuals, and operations outside of the specification range.

4. SMC is exempted from liability for any loss or damage whatsoever caused by malfunctions of its products when combined with other devices or software.



Series IDFA□E


Specific Product Precautions 1

Be sure to read this before handling. For Air Preparation Equipment Precautions, refer to “Precautions for Handling Pneumatic Devices” (M-03-E3A).

Installation

⚠ Caution

- Avoid locations where the air dryer will be in direct contact with wind and rain. (Places where relative humidity is greater than 85%)
- Avoid exposure to direct sunlight.
- Avoid locations that contain much dust, corrosive gases, or flammable gases. Failure due to corrosion is not covered under warranty. However, when the risk of corrosion is high, select “Option C” (copper tubing with anti-corrosive treatment).
- Avoid locations with poor ventilation and high temperature.
- Leave sufficient room between the dryer and the wall according to the “Maintenance space” in the operation manual.
- Avoid locations where a dryer could draw in high temperature air that is discharged from an air compressor or other dryer.

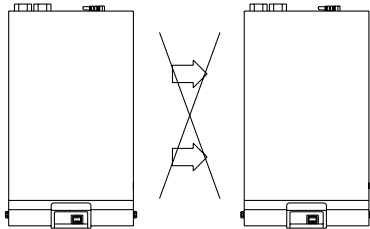

The air exhaust should not flow into the neighboring equipment. (Top side)

- Avoid locations subjected to vibration.
- Avoid possible locations where the drain can freeze.
- Use the air dryer with an ambient temperature lower than 40°C.
- Avoid installation on machines for transporting, such as trucks, ships, etc.

Drain Tube

⚠ Caution

- A polyurethane tube is attached as a drain tube for the IDFA3E to 75E. Use this tube to discharge drainage.
- Do not use the drain tube in an upward direction. Do not bend or crush the drain tube. (Operation of the auto drain will stop water vapour from discharging through the air outlet.)

Power Supply

⚠ Caution


- Connect the power supply to the terminal block.
- Install a suitable circuit breaker applicable for the specific model.
- The voltage fluctuation should be maintained within $\pm 10\%$ of the rated voltage.

Air Piping


⚠ Caution

- Be careful to avoid an error when connecting the air piping to the compressed air inlet (IN) and outlet (OUT).
- Install by-pass piping since it is needed for maintenance.


IDFA3E

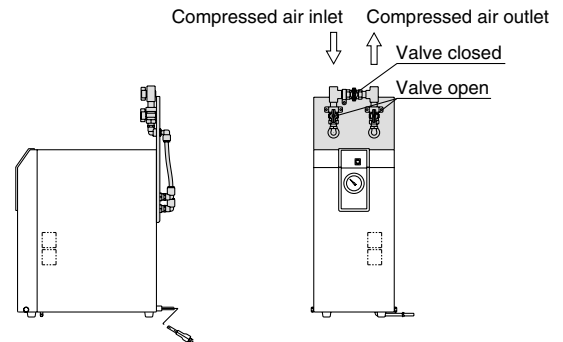

IDFA4E to 15E

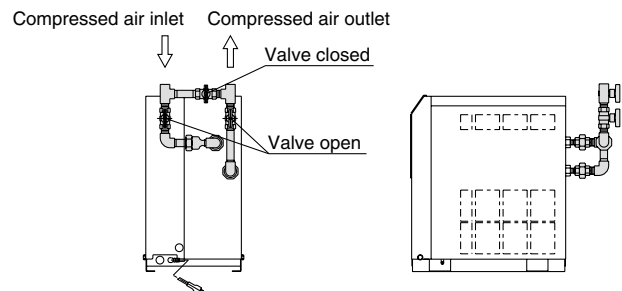

IDFA22E, 37E

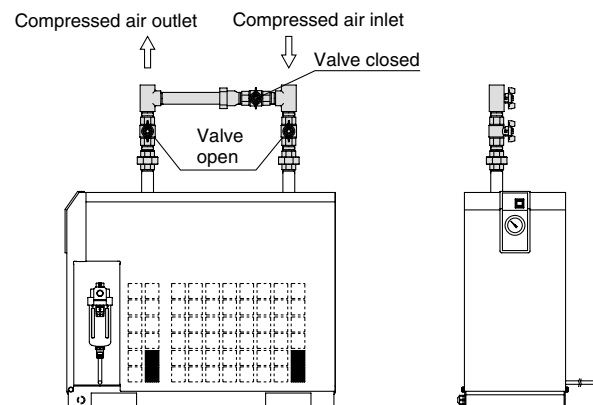



Series IDFA□E

Specific Product Precautions 2


Be sure to read this before handling. For Air Preparation Equipment Precautions, refer to “Precautions for Handling Pneumatic Devices” (M-03-E3A).

Air Piping

⚠ Caution

IDFA55E, 75E

Compressed air outlet Compressed air inlet

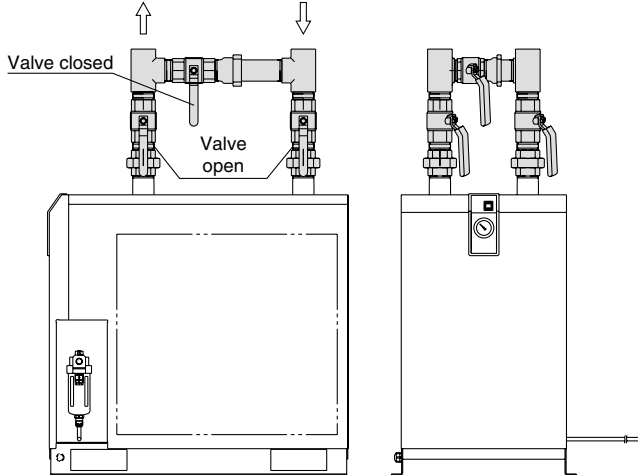

- When tightening piping to the air inlet/outlet tube, the hexagonal parts of the port on the air dryer side or piping should be held firmly with a spanner or an adjustable angle wrench.
- Variations in the operating conditions may cause condensation to form at the surface of the outlet piping. Apply thermal insulation around the piping to prevent condensation from forming.
- Vibration resulting from the compressor should not be transmitted through the air piping to the air dryer.
- Do not allow the weight of the piping to lie directly on the air dryer.

Protection Circuit

⚠ Caution

When the air dryer is operated under the following stated conditions, a protection circuit is activated, the light turns off and operation stops.

- When the compressed air temperature is too high.
- When the compressed air flow rate is too high.
- When the ambient temperature is too high. (40°C or higher)
- When the fluctuation of the power supply is beyond the rated voltage $\pm 10\%$.
- When the dryer is drawing in high temperature air that is discharged from an air compressor or other dryer.
- The ventilation port is obstructed by a wall or clogged with dust.

Compressor Air Delivery

⚠ Caution

Use an air compressor with an air delivery of 100 l/min or larger with the IDFA3E to 75E series.

Since the auto drain of the IDFA3E to 75E is designed in such a way that the valve remains open unless the air pressure rises to 0.15 MPa or higher, air will blow out from the drain discharge port at the time of air compressor start-up until the pressure increases. Therefore, if an air compressor has a small air delivery, the pressure may not be sufficient.

Auto Drain

⚠ Caution

The auto drain may not function properly, depending on the quality of the compressed air. Check the operation once a day.

Cleaning of Ventilation Area

⚠ Caution

Remove dust from the ventilation area once a month using a vacuum cleaner or an air blow nozzle.

Time Delay for Restarting

⚠ Caution

Allow at least three minutes before restarting the dryer. If the air dryer is restarted within three minutes after being stopped, the protection circuit will be activated, operating light will turn off and the dryer will not be activated.

Record of changes

- **B edition** * Addition of Refrigerated Air Dryer, IDFA55E, 75E.
- * Options on page 3 and 6: Addition of “with timer-type solenoid valve”.
- * Number of pages 16 to 20.

LT

Air Dryers for Use in Japan

Complies with CFC restrictions **Refrigerated Air Dryer** Series **IDF**

Standard temperature air inlet type

Rated inlet air temperature:
35, 40°C



Model	Rated inlet condition	Air flow capacity (m ³ /min [ANR])		Applicable air compressor (kW)	Refrigerant	Port size
		50 Hz	60 Hz			
IDF1E	35°C 0.7 MPa	0.1	0.12	0.75	R134a (HFC)	Rc 3/8
IDF2E		0.2	0.235	1.5		
IDF3E		0.32	0.37	2.2		
IDF4E		0.52	0.57	3.7		Rc 1/2
IDF6E		0.75	0.82	5.5		
IDF8E		1.22	1.32	7.5		
IDF11E		1.65	1.82	11		
IDF15E		2.8	3.1	15		Rc 3/4
IDF22E		3.9	4.3	22		
IDF37E		5.7	6.1	37		
IDF55E	8.4	9.8	55			
IDF75E	40°C 0.7 MPa	11.0	12.4	75	R407C (HFC)	R 1
IDF120D		20.0	23.0	120		R 1½
IDF150D		25.0	30.0	150		R 2
IDF190D		32.0	38.0	190		2 ½B flange
IDF240D		43.0	50.0	240		3B flange
IDF370B	35°C 0.7 MPa	54.0	65.0	370	R22	4B flange

Complies with CFC restrictions **Refrigerated Air Dryer** Series **IDU**

High temperature air inlet type

Rated inlet air temperature:
50, 55°C



Model	Rated inlet condition	Air flow capacity (m ³ /min [ANR])		Applicable air compressor (kW)	Refrigerant	Port size
		50 Hz	60 Hz			
IDU3E	55°C 0.7 MPa	0.32	0.37	2.2	R134a (HFC)	Rc 3/8
IDU4E		0.52	0.57	3.7		Rc 1/2
IDU6E		0.75	0.82	5.5		Rc 3/4
IDU8E		1.1	1.2	7.5		
IDU11E		1.5	1.7	11		
IDU15E		2.6	2.8	15		Rc 1
IDU22E		3.9	4.3	22		
IDU37E	5.7	6.1	37			
IDU55E	50°C 0.7 MPa	8.4	9.8	55	R407C (HFC)	R 1
IDU75E		11.0	12.5	75		R 1½
					R22	R 2

* See separate catalogue.

Air Dryers Compliant to Overseas Standards

Refrigerated Air Dryer Series *IDFB□E*

For use in North, Central & South America



UL certified

Power supply voltage:
Single-phase 115 VAC (60 Hz)
 230 VAC (60 Hz)
Three-phase 460 VAC (60 Hz)

Refrigerant: R134a (HFC), R407C (HFC)

Coefficient of destruction for ozone is zero.

Improved corrosion resistance with the use of stainless steel, plate type heat exchanger
 (IDFB4E to 75E)



Series	Air flow capacity SCFM (m ³ /h [ANR])			Refrigerant	Rated inlet condition	Port size	Voltage (at 60 Hz)
	Outlet air pressure dew point						
	37°F (2.8°C)	45°F (7.2°C)	50°F (10°C)				
IDFB3E	10 (17)	11 (19)	12 (20)	R134a (HFC)	100°F (37.8°C) 100 psig (0.7 MPa)	NPT 3/8	1ø 115 VAC
IDFB4E	15 (25)	16 (27)	17 (28)			NPT 1/2	
IDFB6E	25 (43)	26 (45)	28 (47)			NPT 3/4	
IDFB8E	41 (70)	43 (74)	45 (77)				
IDFB11E	59 (100)	62 (106)	65 (110)			NPT 1	1ø 115 VAC
IDFB15E	71 (120)	80 (136)	86 (147)				1ø 230 VAC
IDFB22E	107 (182)	120 (205)	130 (221)			NPT 1 1/2	1ø 230 VAC
IDFB37E	161 (273)	173 (294)	181 (308)				NPT 2
IDFB55E	226 (384)	258 (438)	297 (504)	R407C (HFC)			
IDFB75E	300 (510)	353 (600)	400 (690)				

* See separate catalogue for dryer models conforming with North American standards (UL).

Related Products

Membrane Air Dryer *Series IDG*

Dew point indicator for checking the air drying condition at a glance

(Except IDG1)
(The IDG3, IDG5, IDG3H, IDG5H are semi-standard.)

- Compact
- Lightweight
- Space-saving

Fitting for discharging purge air available

Purge air can be discharged with a tube as it should not be discharged around the membrane air dryer (semi-standard).

Discharged air noise reduced with built-in silencer

[Except IDG1, IDG3, IDG3H, IDG5, IDG5H, IDG30, IDG30H, IDG30L, IDG50, IDG50H, IDG50L]



**CFC free:
Environmentally friendly**

No need of a power supply

A power supply is not necessary at all. This saves time and effort for wiring, and there is no need to consider electrical standards.

No vibration nor heat discharge

No mechanically moving parts such as in a refrigerator.

Suitable for a low dew point

Outlet air atmospheric pressure dew point: -40°C
[IDG30L, IDG50L, IDG60L]
[IDG75L, IDG100L]

Outlet air atmospheric pressure dew point: -60°C
[IDG60S, IDG75S, IDG100S]

**Outlet air flow rate
10 to 1000 ℓ/min (ANR)**

Heatless Air Dryer *Series ID*

Heatless type ID series is ideal for applications that require dry air with a low dew point.

Supplies dry air with a low dew condensation point of -30°C or less.

Small and light without heater and electric control panel



Possible to check the outlet dew point with an indicator

(Self-regenerative style allows easy maintenance.)

**Outlet air flow rate
80 to 780 ℓ/min (ANR)**


EUROPEAN SUBSIDIARIES:

Austria

SMC Pneumatik GmbH (Austria).
Girakstrasse 8, A-2100 Korneuburg
Phone: +43 2262-62280, Fax: +43 2262-62285
E-mail: office@smc.at
http://www.smc.at


France

SMC Pneumatique, S.A.
1, Boulevard de Strasbourg, Parc Gustave Eiffel
Bussy Saint Georges F-77607 Marne La Vallée Cedex 3
Phone: +33 (0)1-6476 1000, Fax: +33 (0)1-6476 1010
E-mail: contact@smc-france.fr
http://www.smc-france.fr


Netherlands

SMC Pneumatics BV
De Ruyterkade 120, NL-1011 AB Amsterdam
Phone: +31 (0)20-5318888, Fax: +31 (0)20-5318880
E-mail: info@smcpneumatics.nl
http://www.smcpneumatics.nl


Spain

SMC España, S.A.
Zuazobidea 14, 01015 Vitoria
Phone: +34 945-184 100, Fax: +34 945-184 124
E-mail: post@smc.smces.es
http://www.smces.es


Belgium

SMC Pneumatics N.V./S.A.
Nijverheidsstraat 20, B-2160 Wommelgem
Phone: +32 (0)3-355-1464, Fax: +32 (0)3-355-1466
E-mail: post@smcpneumatics.be
http://www.smcpneumatics.be


Germany

SMC Pneumatik GmbH
Boschring 13-15, D-63329 Egelsbach
Phone: +49 (0)6103-4020, Fax: +49 (0)6103-402139
E-mail: info@smc-pneumatik.de
http://www.smc-pneumatik.de


Norway

SMC Pneumatics Norway A/S
Vollsveien 13 C, Granfos Næringspark N-1366 Lysaker
Tel: +47 67 12 90 20, Fax: +47 67 12 90 21
E-mail: post@smc-norge.no
http://www.smc-norge.no


Sweden

SMC Pneumatics Sweden AB
Ekhagsvägen 29-31, S-141 71 Huddinge
Phone: +46 (0)8-603 12 00, Fax: +46 (0)8-603 12 90
E-mail: post@smcpneumatics.se
http://www.smc.nu


Bulgaria

SMC Industrial Automation Bulgaria EOOD
16 kiment Ohridski Blvd., fl.13 BG-1756 Sofia
Phone: +359 2 9744492, Fax: +359 2 9744519
E-mail: office@smc.bg
http://www.smc.bg


Greece

SMC Hellas EPE
Anagniniseos 7-9 - P.C. 14342. N. Philadelphia, Athens
Phone: +30-210-2717265, Fax: +30-210-2717766
E-mail: sales@smchellas.gr
http://www.smchellas.gr


Poland

SMC Industrial Automation Polska Sp.z.o.o.
ul. Poloneza 89, PL-02-826 Warszawa,
Phone: +48 22 211 9600, Fax: +48 22 211 9617
E-mail: office@smc.pl
http://www.smc.pl


Switzerland

SMC Pneumatik AG
Dorfstrasse 7, CH-8484 Weisslingen
Phone: +41 (0)52-396-3131, Fax: +41 (0)52-396-3191
E-mail: info@smc.ch
http://www.smc.ch


Croatia

SMC Industrijska automatika d.o.o.
Cromerac 12, 10000 ZAGREB
Phone: +385 1 377 66 74, Fax: +385 1 377 66 74
E-mail: office@smc.hr
http://www.smc.hr


Hungary

SMC Hungary Ipari Automatizálási Kft.
Budafoki út 107-113, H-1117 Budapest
Phone: +36 1 371 1343, Fax: +36 1 371 1344
E-mail: sales@smc.hu
http://www.smc.hu


Portugal

SMC Sucursal Portugal, S.A.
Rua de Engº Ferreira Dias 452, 4100-246 Porto
Phone: +351 22-610-89-22, Fax: +351 22-610-89-36
E-mail: postpt@smc.smces.es
http://www.smces.es


Turkey

Entek Pnömatik San. ve Tic. A*.
Perpa Ticaret Merkezi B Blok Kat:11 No: 1625, TR-34386, Okmeydanı, Istanbul
Phone: +90 (0)212-444-0762, Fax: +90 (0)212-221-1519
E-mail: smc@entek.com.tr
http://www.entek.com.tr


Czech Republic

SMC Industrial Automation CZ s.r.o.
Hudcova 78a, CZ-61200 Brno
Phone: +420 5 414 24611, Fax: +420 5 412 18034
E-mail: office@smc.cz
http://www.smc.cz


Ireland

SMC Pneumatics (Ireland) Ltd.
2002 Citywest Business Campus, Naas Road, Saggart, Co. Dublin
Phone: +353 (0)1-403 9000, Fax: +353 (0)1-464-0500
E-mail: sales@smcpneumatics.ie
http://www.smcpneumatics.ie


Romania

SMC Romania srl
Str Frunzei 29, Sector 2, Bucharest
Phone: +40 213205111, Fax: +40 213261489
E-mail: smcromania@smcromania.ro
http://www.smcromania.ro


UK

SMC Pneumatics (UK) Ltd
Vincent Avenue, Crownhill, Milton Keynes, MK8 0AN
Phone: +44 (0)800 1382930 Fax: +44 (0)1908-555064
E-mail: sales@smcpneumatics.co.uk
http://www.smcpneumatics.co.uk


Denmark

SMC Pneumatik A/S
Knudsminde 4B, DK-8300 Odder
Phone: +45 70252900, Fax: +45 70252901
E-mail: smc@smc-pneumatik.dk
http://www.smc.dk.com


Italy

SMC Italia S.p.A
Via Garibaldi 62, I-20061 Carugate, (Milano)
Phone: +39 (0)2-92711, Fax: +39 (0)2-9271365
E-mail: mailbox@smcitalia.it
http://www.smcitalia.it


Russia

SMC Pneumatik LLC.
4B Sverdlovskaja nab, St. Petersburg 195009
Phone: +7 812 718 5445, Fax: +7 812 718 5449
E-mail: info@smc-pneumatik.ru
http://www.smc-pneumatik.ru


Estonia

SMC Pneumatics Estonia OÜ
Laki 12, 106 21 Tallinn
Phone: +372 6510370, Fax: +372 65110371
E-mail: smc@smcpneumatics.ee
http://www.smcpneumatics.ee


Latvia

SMC Pneumatics Latvia SIA
Smerla 1-705, Riga LV-1006
Phone: +371 781-77-00, Fax: +371 781-77-01
E-mail: info@smclv.lv
http://www.smclv.lv


Slovakia

SMC Priemyselná Automatizácia, s.r.o.
Námestie Matina Benku 10, SK-81107 Bratislava
Phone: +421 2 444 56725, Fax: +421 2 444 56028
E-mail: office@smc.sk
http://www.smc.sk


Finland

SMC Pneumatics Finland Oy
PL72, Tiistiniityntie 4, SF-02231 ESPOO
Phone: +358 207 513513, Fax: +358 207 513595
E-mail: smcfi@smc.fi
http://www.smc.fi


Lithuania

SMC Pneumatics Lietuva, UAB
Oslo g.1, LT-04123 Vilnius
Phone: +370 5 264 81 26, Fax: +370 5 264 81 26


Slovenia

SMC industrijska Avtomatika d.o.o.
Mirska cesta 7, SLO-8210 Trebnje
Phone: +386 7 3885412 Fax: +386 7 3885435
E-mail: office@smc.si
http://www.smc.si


OTHER SUBSIDIARIES WORLDWIDE:

ARGENTINA, AUSTRALIA, BOLIVIA, BRASIL, CANADA, CHILE,
CHINA, HONG KONG, INDIA, INDONESIA, MALAYSIA, MEXICO,
NEW ZEALAND, PHILIPPINES, SINGAPORE, SOUTH KOREA,
TAIWAN, THAILAND, USA, VENEZUELA

<http://www.smc.eu>
<http://www.smcworld.com>