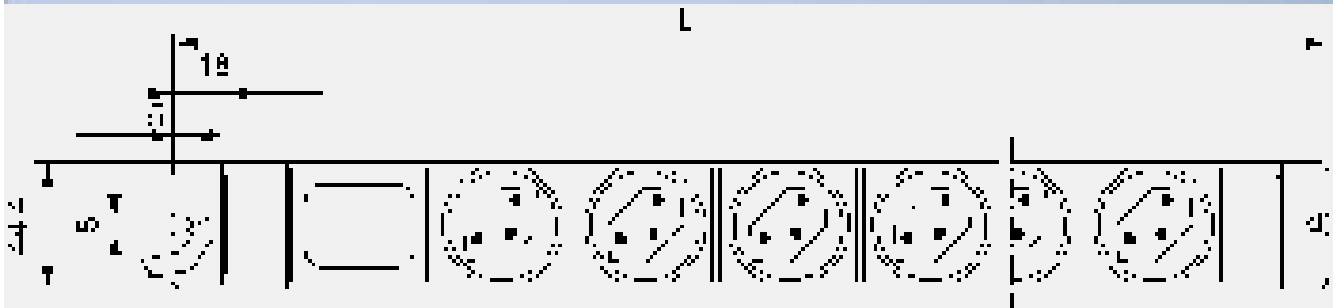







DI-STRIP Socket strip Compact - Swiss standard SEV 1011 without switch with standard side panel



| DI-STRIP  |   |   |   | Order number  |
|---|---|---|---|---|
| Compact - Swiss standard SEV 1011   |   |   |   |   |
| without switch with standard side panel   |   |   |   |   |
|  |  |  |  |  |
| 4   | +   | -   | 333   | <b>03.701.004.1</b>   |
| 7   | +   | +   | 483   | <b>03.701.007.X</b>   |
| 11  | +   | -   | 683   | <b>03.701.011.1</b>   |

Replace **X** with the digit representing your colour choice

.1 = RAL 7035

.6 = RAL 7035 / RAL 2003

- 19" installation option (with length 483 mm)
- rotation of the sockets: 45°
- feed: H05VV-F 3G 1.5 mm<sup>2</sup>
- cast-on plug
- with standard side panel
- fixation with angle brackets
- secured with an input fuse 10 A

**Dimension**

- distance of the sockets: 50 mm
- height: 45.5 mm
- enclosure width: 44.4 mm (=1 HU)
- feed 2.5 m

**Load rating**

- Nominal voltage: 230 VAC ± 10%
- Nominal current: 10 A

DI-STRIP Socket strip Compact - Swiss standard SEV 1011 without switch with standard side panel

### **Approvals**

- CE label in accordance with low voltage directive 2006/95/EC and EMC directive 2004/108/EC
- GS certificate
- CB-scheme

### **Material / Finish**

- Enclosure: closed sheet-steel extrusion, zinc-plated, powder-coated fine texture
- Plastic parts: Vampamid 6 0024 V0 (UL94), recyclable, inked fine texture
- Internal conductor: full-height busbar, brass
- Feed: PVC

### **Colour**

- RAL 7035 light grey

### **Supply schedule**

1 Socket strip  
2 Angle brackets  
additionally with length 483 mm:  
2 19" angle brackets

### **How supplied**

- Assembled, wired and tested