


Clock Oscillator SMD-version

+3,3V

model	KXO-V96T
frequency	125,0 MHz
frequency stability -40° ~ +85°C	± 50 ppm
operating temperature	-40° ~ +85°C
storage temperature	-50° ~ +125°C
symmetry	40% ~ 60% at 50% V _{DD} level
rise & fall time max.	5 ns (10% V _{DD} ~ 90% V _{DD} level)
"0" level max.	VOL: 10% V _{DD}
"1" level min.	VOH: 90% V _{DD}
input voltage V _{DD}	+3,3V ±5%
stand-by control voltage (pin#1)	V _{IH} (min): 70% V _{DD} V _L (max): 30%V _{DD} *
supply voltage	-0,5V ~ +7,0V
input current max.	50 mA (pin #1=Open or V _{IH})
output load max.	15pF (CMOS)
start up time max.	10 ms
disable delay time max.	150 ns
enable delay time max.	10 ms
stand by current max.*	50 µA (Pin #1=V _L)
aging for first year max.	±5 ppm at +25°
jitter	deterministic jitter 5ps max. random jitter 7ps max. norm 1-sigma 7ps max. peak to peak 40ps max.
RoHS	according to RoHS 2011/65/EU
contents of reel	1000 pcs.
part no.	12.95092

* Internal crystal oscillation to be halted (pin#1=V_L)


Dimensions (mm):

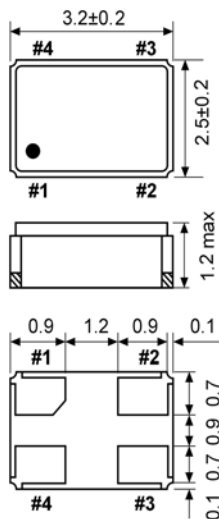


PIN	CONNECTION
1	"L" OPEN or "H"
2	GND
3	Z OUTPUT
4	V _{DD}

Z: high impedance


Test circuit:




Output waveform:

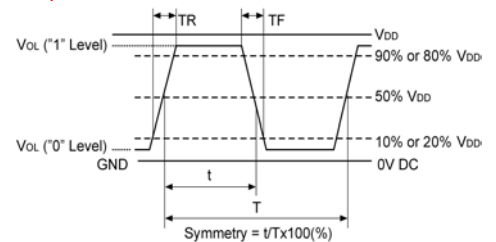

Suggested soldering pad:



Reflow soldering condition:

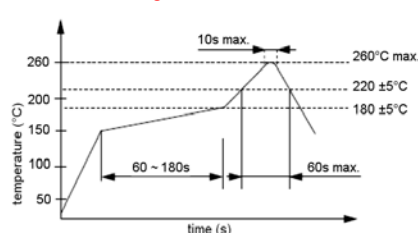

Tape specification:

