

6823 Max. 12 W

AC/DC power supplies - linear - regulated

6 - 12 V

12 - 24 V

5 V Max. 8 W

MASCOT
tech spec


- Stepless adjustable output voltage
- Thermal fuse in transformer
- Mains cord
- Cord or snap terminals
- Mounting bracket available
- Available as a multiple output power supply $+5 \pm 12$ V
- Trinnløs justerbar utgangsspenning
- Termosikring i transformator
- Nettledning
- Sekundærledning eller snappkontakt
- Kan leveres med festebrakett
- Finnes i flerspenningsversjon $+5 \pm 12$ V



Technical specifications	Tekniske data	6-12 V*
Input voltage:	Inngangsspenning:	230 VAC $+6/-10\%$, 50/60Hz
Output voltage:	Utgangsspenning:	6-12 VDC
Max. output power:	Maks. utgangseffekt:	12 W
Max. load current	Maks. laststrøm	
• 6-12 V:	• 6-12 V:	6 V / 0,6 A - 12 V / 1,0 A
• 12-24 V:	• 12-24 V:	0,5 A
Load regulation:	Lastregulering:	130 mV
Temperature range:	Temperaturområde:	$-10^{\circ}\text{C} - +40^{\circ}\text{C}$
Ripple:	Rippel:	3 mV RMS
Insulation class:	Isolasjonsklasse:	II
Insulation class:	Isolasjonsspenning:	3000 VAC
Electrical safety standard:	Elektrisk sikkerhetsstandard:	EN 60950
EMC standards	EMC standarder	
• Emission:	• Emisjon:	EN 61000-6-3
• Immunity:	• Immunitet:	EN 61000-6-1
Dimensions (LxWxH):	Mål (LxBxH):	98 x 108 x 55 mm
Weight:	Vekt:	920 g

* Some technical specifications may differ for other voltage versions. / Visse tekniske data kan variere for de forskjellige spenningsversjoner.

Diagram 6-12 V version
Diagram 6-12 V versjon

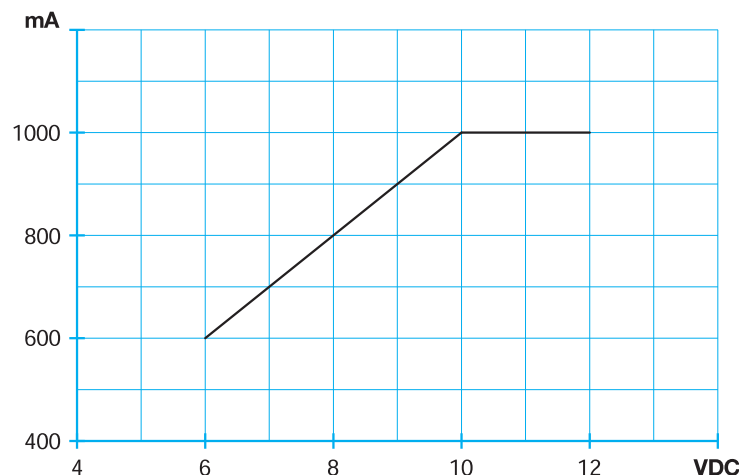

www.mascot.com

sales@mascot.no

TS070709

Main Office NORWAY
Box 177
N-1601 Fredrikstad
+47 69 36 43 00

Mascot UK
Box 2090, Salisbury
Wiltshire SP2 2BH
+44 172 250 4853

Mascot DE, BENELUX
Hirschbergstr. 28/7
D-74838 Limbach
+49 628 795 140

Mascot DE, CH, AT
Tettmanger Str. 52
D-88239 Wangen
+49 752 895 1677

Mascot FRANCE
38 rue Leo Lagrange
F-94270 Le Kremlin Bicêtre
+33 146 587 185

Mascot BALTIC, RUSSIA
Peterburi tee 81
11415, Tallin, Estonia
+372 555 21 121

Mascot SWEDEN
Box 177
N-1601 Fredrikstad
+46 526 14025