


P1,P2: M-Y222E
 M-222E
 P3: M-426E

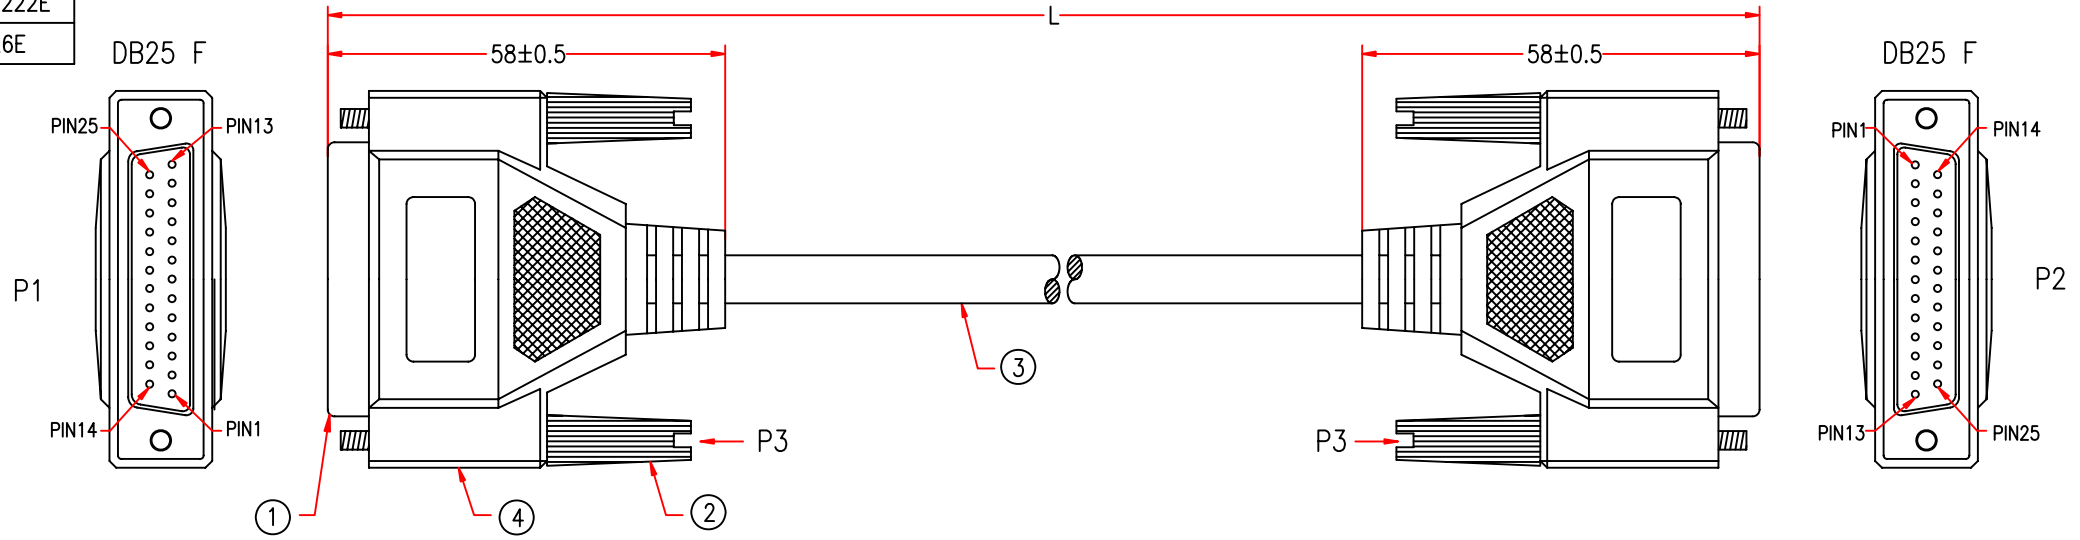

NOTE: All relevant materials are complied with RoHS directive .
 PACKING: EACH PC WITH PE BAG AND BARCODE LABEL.
 THE BARCODE LABEL WILL STICK IN THE MIDDLE OF POLYBAG
 Test condition: 100% OPEN & SHORT TESTING
 Insulation Resistance 5M ohm
 Contact Resistance 5 ohm
 Voltage Rating: 300V

2009-7							
	P1		P2	P1		P2	
	BROWN	1	1	14	14	BROWN/BLACK	
	RED	2	2	15	15	RED/BLACK	
	ORANGE	3	3	16	16	ORANGE/BLACK	
	PINK	4	4	17	17	PINK/BLACK	
	YELLOW	5	5	18	18	YELLOW/BLACK	
	GREEN	6	6	19	19	GREEN/BLACK	
	LIGHT GREEN	7	7	20	20	LIGHT GREEN/BLACK	
	BLUE	8	8	21	21	BLUE/BLACK	
	LIGHT BLUE	9	9	22	22	LIGHT BLUE/BLACK	
	PURPLE	10	10	23	23	PURPLE/BLACK	
	GREY	11	11	24	24	GREY/BLACK	
	WHITE	12	12	25	25	WHITE/BLACK	
	BLACK	13	13	SHIELD	SHIELD		

No.	DESCRIPTION	Q'TY	Supplier
4	BLACK PVC TUBE ϕ 3.0*30mm	2	M304
	ALUMINUM FOIL 33*110mm	2	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
3	NON-UL 25C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BEIGE, DRAWING No. EMAL2825C-095	Xmm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
1	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108

APPROVED		Maxxtro [®]	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	ZL		
DATE	26/DEC/14	ITEM NO.	2009-7

REV.2 2014.11.26	MODIFY LABEL 2	REV.3 2014.12.26	MODIFY LABEL 1
REV.1 2014.02.21	ADD LENGTH & 3M LABEL	CHECKED	