



CUSTOMER	
PRODUCT NO.	FLAT CAT. 6 UTP

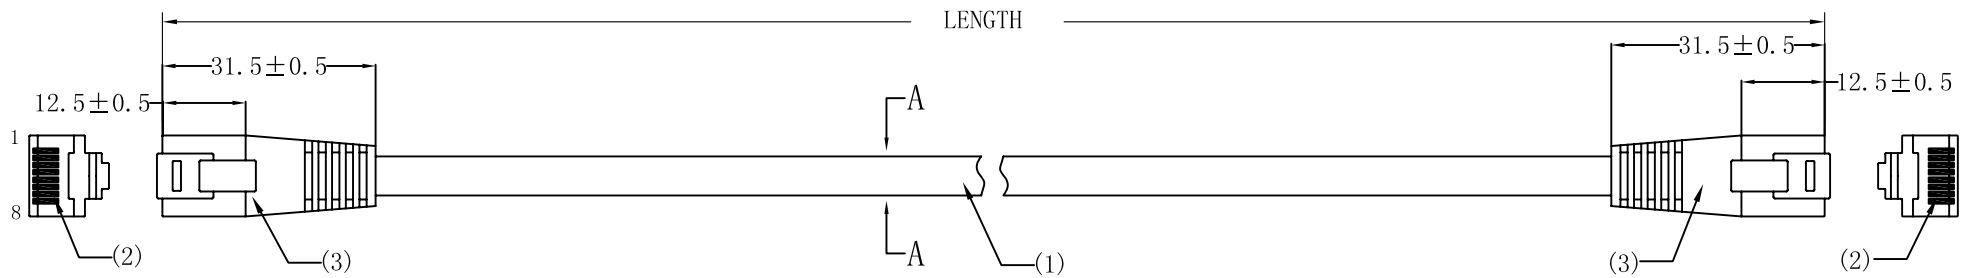

SIDE:A


SIDE:B

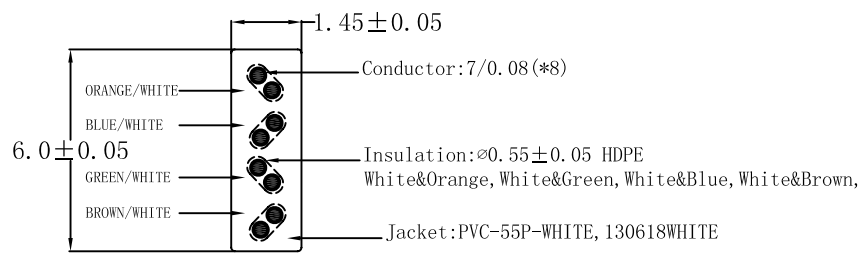


Section:A-A

NOTE:

- (1). Cable SPEC: [32AWG (7/0.08CU)*2C]*4P FLAT cable
Jacket Material:PVC OD:1.45*6.0 ± 0.05mm
- Cable Printing:UTP 4PAIR Cat.6 Flat Data Cable
- (2). Connector A&B: RJ45 (8P8C) Male Type
INSULATION:Clear Polyester
CONTACTS:Brass,Gold Plated 3U"
- (3). Over Mold: PVC
- (4). Parameter Settings: UT8080M
 - 1. Conductive Resistance:1kΩ
 - 2. Insulative Resistance:5MΩ (Min.)
- (5)Packing: POLYBAG / Blister Packing
- (6)With Patch Cord Test.
- (7)All Materials Must Be In Line With RoHS And REACH.

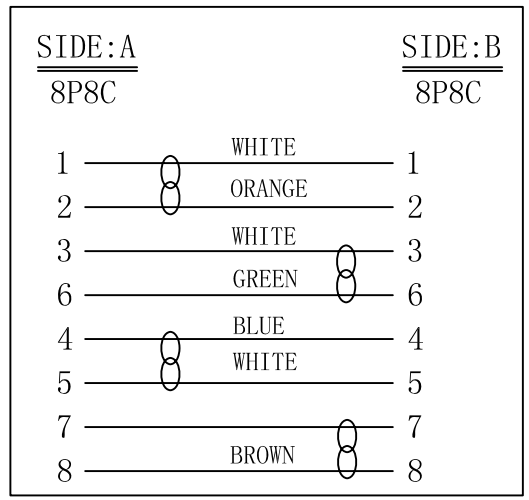

PIN OUT: (4)

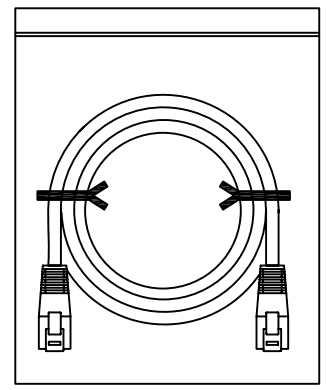

PACKING: (5)

GENERAL TOLERANCES
(UNLESS SPECIFIED)

Maxxtro®

LENGTH: X. ± 1
. X ± 0.2
. XX ± 0.10
ANGLE: X° . ± 1°
. X° ± 0° 30'

UNIT:mm	REV:00			NAME	UTP CAT. 6 FLAT CABLE
DRAWING	XIAODENG	2015/1/12	S. P. NO.	HT-6258	
CHECK			P. O. NO.		DWG. NO.
APPROVE			SIZE		PAGE
					1/1

00	NEW	2015/1/12
REV	DESCRIPTION	DATE