

Aluminum Electrolytic Type / Radial Lead Type

RoHS compliance

ME-WX Series

Low Impedance

High Ripple Current




- 105°C, 2,000 to 5,000hrs.
- Do not clean the capacitors using solvent.

■ Specifications

Items	Condition	Specifications					
CE-BJ·BE	Rated voltage (V)	—	6.3	10	16	25	35
CE-BD	Surge voltage (V)	Room temperature	8.0	13	20	32	44
CE-BS	Category temperature range (°C)	—					63
CE-BSS	Capacitance tolerance (%)	120Hz/20°C			M : ±20		
CE-FE	Dissipation Factor (tanδ)	120Hz/20°C	0.22	0.19	0.16	0.14	0.12
CE-LD			When rated capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.				0.10
CE-FU	Leakage current (LC)	μA/after 2minutes (max)			0.01CV		
CE-FS	Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-25°C Z/Z _{20°C}	2	2	2	2
CE-FSS			-40°C Z/Z _{20°C}	3	3	3	3
CE-FH			Test	φ5 to φ6.3 : 2,000hrs., φ8 : 3,000hrs., φ10 to φ12.5 : 4,000hrs., φ16 : 5,000hrs.			
CE-GA			△C/C	Within ±25% of the initial value			
CE-AZ			tanδ	≤ 2 times the initial specified value			
CE-KX			LC	≤ The initial specified value			
CE-LX							
CE-LS							
CE-LH							
CE-LL							
CE-PC							
CE-PH							
CE-PF							
CE-NP							
CE-FN							
ME-SWB							
ME-UZ-SZ							
ME-UAX-SAX							
ME-SWG							
ME-LS							
ME-HC							
ME-CZ							
ME-CA							
ME-CX							
ME-AZ							
ME-WX							
ME-WA							
ME-WL							
ME-WG							
ME-PX							
ME-HPC-HPD							
ME-FC-FD							
ME-FAZ							
ME-FH							
ME-SWN							
ME-HWN							

■ Dimensions

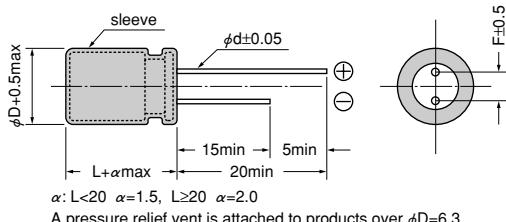

(Unit : mm)						
φD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
φd	0.5	0.5	0.6	0.6	0.6★	0.8

★φ12.5×30:φd=0.8

■ Size List, Impedance, Rated Ripple Current

V	6.3			10			
Items	Case size φDxL(mm)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)
ME-HC	5×11	150	0.30	250	100	0.30	250
ME-CZ	6.3×11	330	0.13	405	220	0.13	405
ME-CA	8×11.5	560	0.072	760	470	0.072	760
ME-CX	8×15	820	0.056	995	★1 680	0.056	995
ME-AZ	8×20	★1 1200	0.041	1250	★1 1000	0.041	1250
ME-WX	10×12.5	1000	0.053	1030	680	0.053	1030
ME-PX	10×16	1200	0.038	1430	1000	0.038	1430
ME-HPC-HPD	10×20	1500	0.023	1820	1200	0.023	1820
ME-FC-FD	10×20	2200	0.023	1820	1500	0.023	1820
ME-FAZ	10×23	★3 2200	0.022	2150	★3 1500	0.022	2150
ME-FH	12.5×20	3300	0.021	2360	2200	0.021	2360
ME-SWN	12.5×25	3900	0.018	2770	3300	0.018	2770
ME-HWN	12.5×30	4700	0.016	3290	3900	0.016	3290
	16×21	5600	0.018	3140	★2 3900	0.018	3140
	16×25	6800	0.016	3460	5600	0.016	3460

★1 WXL ★2 WXS ★3 WXV

■ Size List, Impedance, Rated Ripple Current





V Items Case size φDxL(mm)	16			25		
	Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)
5×11	56	0.30	250	47	0.30	250
6.3×11	120	0.13	405	100	0.13	405
8×11.5	330	0.072	760	220	0.072	760
8×15	★1 470	0.056	995	330	0.056	995
8×20	★1 680	0.041	1250	★1 470	0.041	1250
10×12.5	470	0.053	1030	★2 330	0.053	1030
10×16	680	0.038	1430	470	0.038	1430
10×20	1000	0.023	1820	680	0.023	1820
10×20	1200	0.023	1820	820	0.023	1820
10×23	★3 1200	0.022	2150	★3 820	0.022	2150
12.5×20	1500	0.021	2360	1000	0.021	2360
12.5×25	2200	0.018	2770	1500	0.018	2770
12.5×30	2700	0.016	3290	1800	0.016	3290
16×21	★2 2700	0.018	3140	★2 1800	0.018	3140
16×25	3900	0.016	3460	2700	0.016	3460

V Items Case size φDxL(mm)	35			50		
	Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)
5×11	33	0.30	250	22	0.34	238
6.3×11	56	0.13	405	47	0.14	385
8×12.5	★3 150	0.072	760	100	0.074	724
8×15	220	0.056	995	120	0.061	950
8×20	★1 270	0.041	1250	180	0.046	1190
10×12.5	★2 220	0.053	1030	150	0.061	979
10×16	330	0.038	1430	220	0.042	1370
10×20	470	0.023	1820	270	0.030	1580
10×23	★3 560	0.022	2150	330	0.028	1870
12.5×20	680	0.021	2360	470	0.027	2050
12.5×25	1000	0.018	2770	560	0.023	2410
12.5×30	1200	0.016	3290	680	0.021	2860
16×21	★2 1200	0.018	3140	820	0.023	2730
16×25	1800	0.016	3460	1000	0.021	3010

Please refer to page 15 for the ripple current frequency coefficient.

★1 WXL ★2 WXS ★3 WXV

■ Model No.

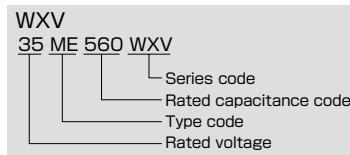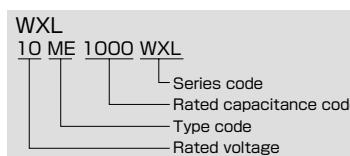

- CE-BJ·BE
- CE-BD
- CE-BS
- CE-BSS
- CE-FE
- CE-LD
- CE-FU
- CE-FS
- CE-FSS
- CE-FH
- CE-GA
- CE-AX
- CE-KX
- CE-LX
- CE-LS
- CE-LH
- CE-LL
- CE-PC
- CE-PH
- CE-PF
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ·SZ
- ME-UAX·SAX
- ME-SWG
- ME-LS
- ME-HC
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-PX
- ME-HPC·HPD
- ME-FC·FD
- ME-FAZ
- ME-FH
- ME-SWN
- ME-HWN