



CIRCUIT DIAGRAM  
C: COMMON PIN  
BOTTOM VIEW



HOLE LAYOUT  $\pm 0.05$

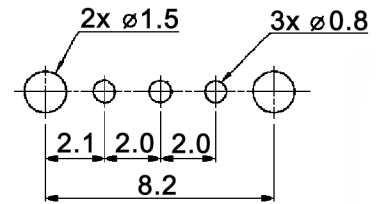

**Specifications:**

- Contact rating: 0.1A, 12V DC
- Contact resistance: 500mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 10 000 cycles
- Soldering conditions: 260 +/-5°C, 5 +/-1sec.
- Material: Spring plate: phosphor bronze, washing  
Contact clip: phosphor bronze, silver plated  
Slider: PA46, black  
Terminal: brass strip, silver plated  
Base: phenolic resin, natural  
Frame: steel, nickel plated



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	05/12	dr
Temperatures	12/12	dr
Modifications	Date	Name

**MFP 113 D-RA**

**knitter-switch**

**30 26 36**

Page

1/1