





### CIRCUIT DIAGRAM

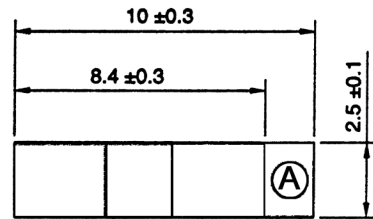

### Switch Position



### P.C.B. LAY OUT



### Specifications:

- Contact rating: 0.2A, 24V; 0.5A, 12V
- Contact resistance: 50mOhm max.
- Insulation resistance: 10 000MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute (2mA)
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 5 000 cycles
- Operating force: 800gf max.
- Packing: 53 pcs. / tube
- Soldering conditions: max.: 260 +/-3°C, 3sec.
- Material: Case: PA66 glass reinforced nylon, blue  
Slider: PA46 glass reinforced nylon, ivory  
Terminals: brass, 0.075µm gold plated over 1µm nickel  
Fixed contact: brass, 0.075µm gold plated over 1µm nickel  
Movable contact: phosphor bronze, 0.125µm gold plated over 1µm nickel



Tolerances:	Date	Name	<h1>MMP 1010 D</h1>
	01/03	us	
Specifications	01/13	dr	<h2>30 03 40</h2>
Slider colour	09/12	dr	
Modifications	Date	Name	Page 1/1