



Microminiature Slide Switches


Specifications:

Contact rating:	12 V DC, 200 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-10 °C to +60 °C
Mechanical life:	minimum 5000 operations
Contacts:	phosphor bronze, silver-plated
Terminals:	brass silver-plated
Contact timing:	non-shorting
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C ± 5 °C

Models: Switching functions


MMP 121

on on




MMP 131

on on on



MMP 221

on on

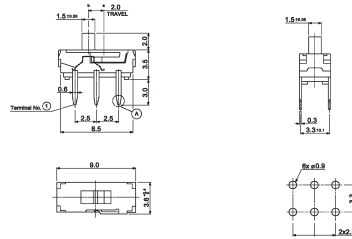

MMP 231

on on on

