FIBOX
Enclosing innovations

MNX PC 95/60 HT

Sample photo

Order symbol:	PC 95/60 HT	**EAN:**	6418074054678
Product nbr:	6011931	**El. number:**	
Description:	Enclosure, PC	Finland:	3421372
Remarks:	Smoked transparent cover	Denmark:	8212027747
		Sweden:	6011931
		Norway:	

Including: Base with PUR gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

Dimensions:	**Length**	**Width**	**Height**
mm:	100	100	60
inch:	3.9	3.9	2.4

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035
Cover colour:	Smoked grey
Cover screws material:	Polyamide
Cover screws colour:	Black
Gasket material:	Polyurethane

Temperatures:

Short term:	-40 … 120 °C
Continuous:	-40 … 80 °C
Short term:	-40 … 250 °F
Continuous:	-40 … 175 °F

Accessories:

MIV 95	Mounting plate (Galvanized steel)
MIN 8	DIN-15 Mounting rail
B-3	DIN-35 Mounting rail
FP 22046	Wall fastening lug (4 pcs)

Rating:

Ingress Protection (EN 60529): IP 66/67
Impact Resistance (EN 62262): IK 08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
UV resistance: UL 508
Flammability Rating (UL 746 C 5): UL 746C 5V
Glow Wire Test (IEC 695-2-1) °C: 960
NEMA Class: NEMA 1, 4, 4X, 6, 12, 13

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
Det Norske Veritas
Fimko
Europe EN 62208: 2003
UL Canada
Gost R

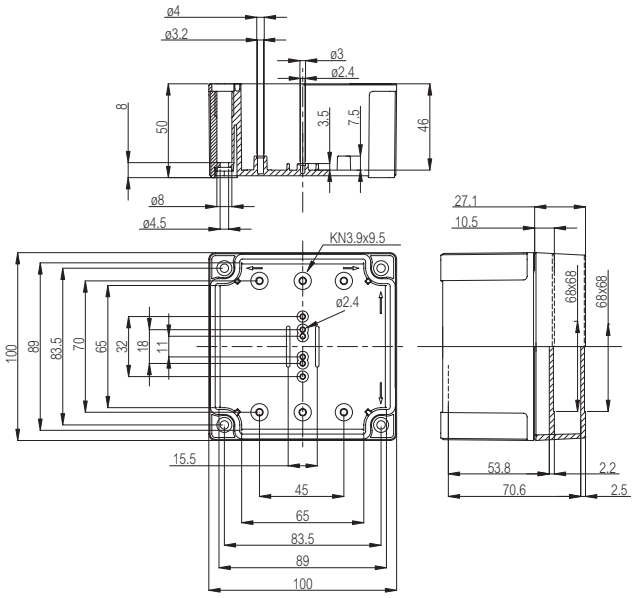

© Fibox Oy, Data subject to change without notice (printed: 17.12.2013)