FIBOX
Enclosing innovations

MNX PCM 125/75 T

Sample photo

Order symbol:	PCM 125/75 T	**EAN:**	6418074038210
Product nbr:	6016908	**El. number:**	
Description:	Enclosure, PC	Finland:	3421661
Remarks:	Smoked transparent cover	Denmark:	8212027093
		Italy:	7342027
		Sweden:	2535415
		Norway:	2535510

Including: Base with metric knock-outs and TPE gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

Dimensions:	Length	Width	Height
mm:	130	130	75
inch:	5.1	5.1	3.0

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035
Cover colour:	Smoked grey
Cover screws material:	Polyamide
Cover screws colour:	Black
Gasket material:	TPE

Temperatures:

Short term:	-40 … 120 °C
Continuous:	-40 … 80 °C
Short term:	-40 … 250 °F
Continuous:	-40 … 175 °F

Accessories:

MIV 125	Mounting plate (Galvanized steel)
MIN 10	DIN-15 Mounting rail
MIV 10	DIN-35 Mounting rail
FP A 125/130	Front plate (Aluminium)
HFP 130	Front plate hinge series
FP 22046	Wall fastening lug (4 pcs)

Rating:

Ingress Protection (EN 60529): IP 66/67
Impact Resistance (EN 62262): IK 08
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
UV resistance: UL 508
Flammability Rating (UL 746 C 5): UL 746C 5V
Glow Wire Test (IEC 695-2-1) °C: 960
NEMA Class: NEMA 1, 4, 4X, 6

Certificates:

Germanischer Lloyd (GL)
Underwriters Laboratories
Det Norske Veritas
Fimko
Europe EN 62208: 2003
UL Canada
Gost R

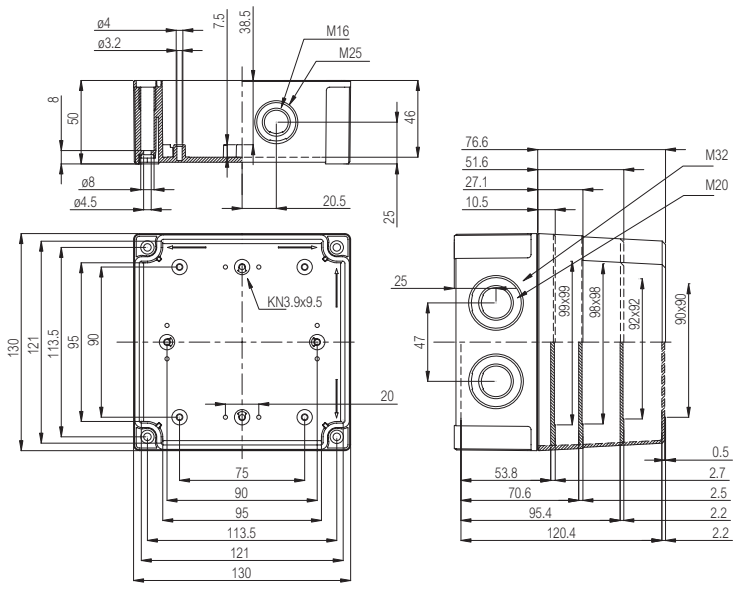

© Fibox Oy, Data subject to change without notice (printed: 31.12.2013)